
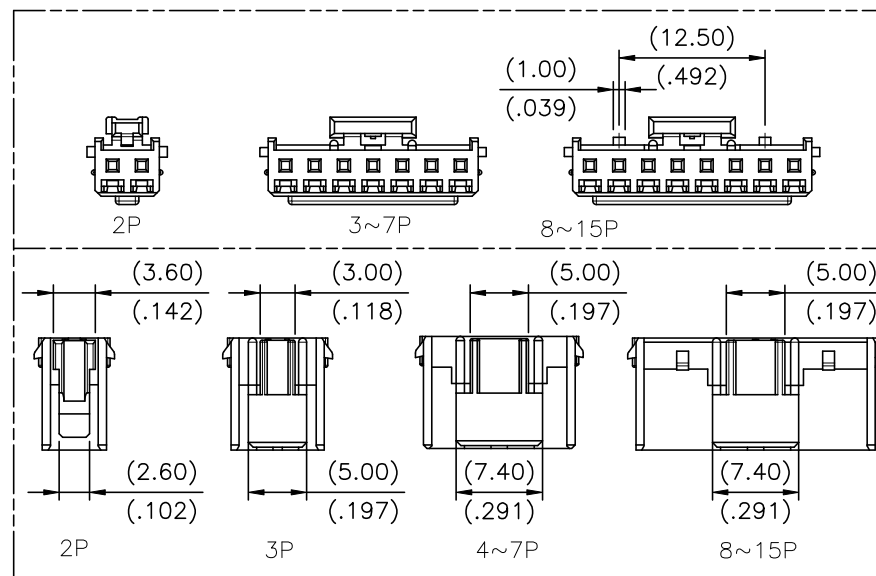


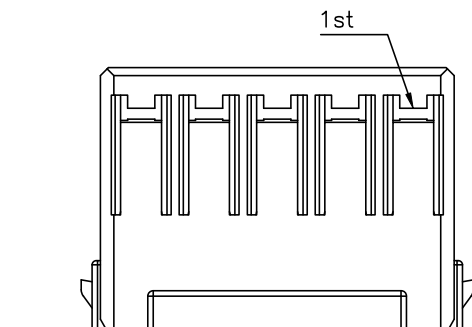

① ② ③ ④ ⑤

- ① Series No.
- ② Contact: 02 to 15
- ③ S= Female
- ④ L= With Locking Latch
- ⑤ Option:
000=Standard(Color Nature)

Circuits	Dimension		
	A	B	C
2	2.50(.098)	5.50(.217)	4.10(.161)
3	5.00(.197)	8.00(.315)	6.60(.260)
4	7.50(.295)	10.50(.413)	9.10(.385)
5	10.00(.393)	13.00(.512)	11.60(.457)
6	12.50(.492)	15.50(.610)	14.10(.555)
7	15.00(.591)	18.00(.709)	16.60(.654)
8	17.50(.689)	20.50(.807)	19.10(.752)
9	20.00(.787)	23.00(.906)	21.60(.850)
10	22.50(.886)	25.50(1.004)	24.10(.949)
11	25.00(.984)	28.00(1.102)	26.60(1.047)
12	27.50(1.083)	30.50(1.201)	29.10(1.146)
13	30.00(1.181)	33.00(1.299)	31.60(1.244)
14	32.50(1.280)	35.50(1.398)	34.10(1.343)
15	35.00(1.378)	38.00(1.496)	36.60(1.441)

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 2.50MM(.098") PITCH HOUSING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Eric	1/16-24'				TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER:	Eric	1/16-24'		MATERIAL:				
1				CHECKED BY:	Eisley	1/16-24'			FINISH:			
Sym	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/16-24'				DRAWING NO.	CIEP04SB	PART NO.
									SCALE	3/1	SHEET	1 OF 1