

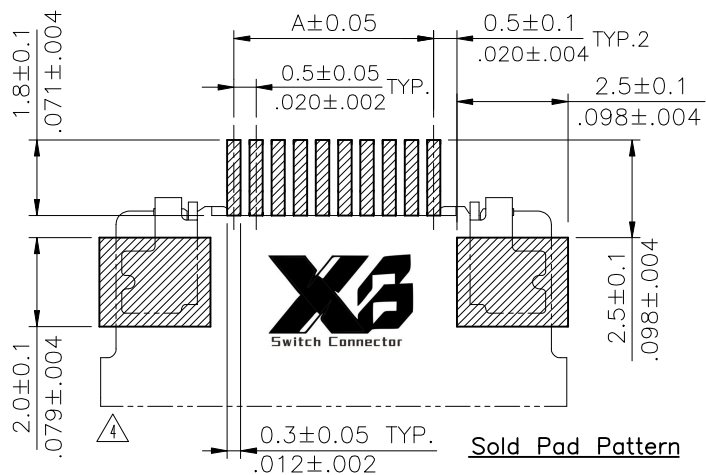
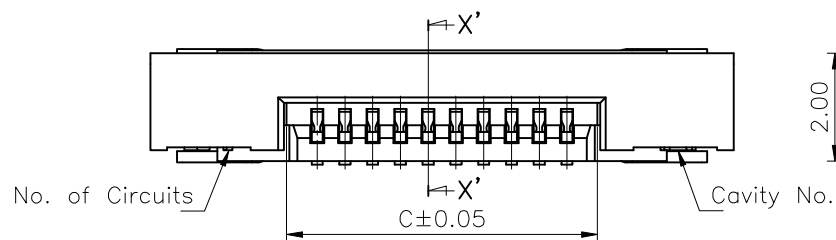


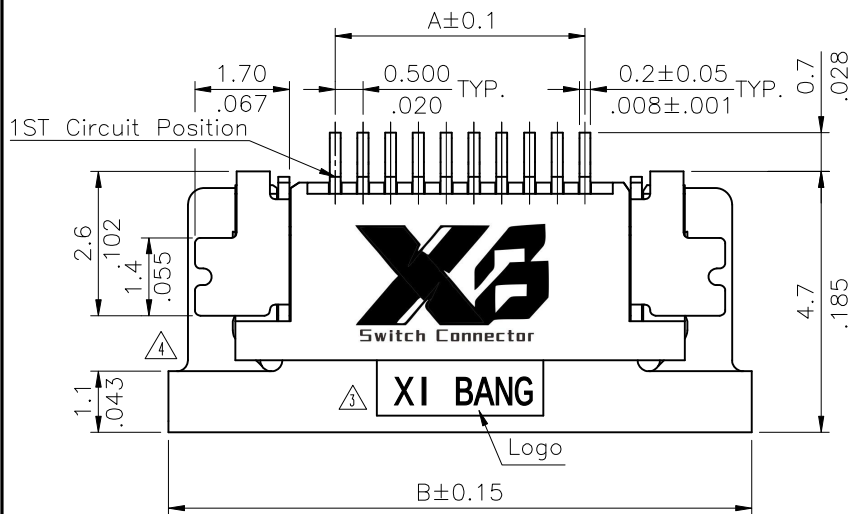

Ordering Code

CF20 ** 1 D 0 *0 -NH
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② No. of Circuits
③ Plating code:
1 = 3.05 μ m(120 μ) Min. Matte Tin
over 0.76 μ m(30 μ) Nickel
④ Contact style: D= Downside contact
⑤ Color: 0= Nature
⑥ Other option: R0= Tape & Reel
T0= Tube Packing
⑦ Other option:
NH= For Lead Free IR Processes
and Halogen-Free

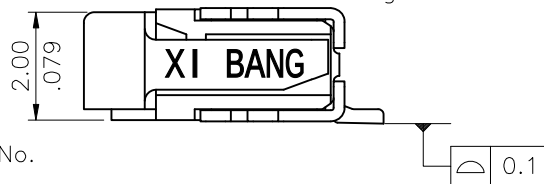


A = 0.50 * No. of Spaces

B = A + 6.0


C = A + 1.1

* Available in 4 through 55 circuits

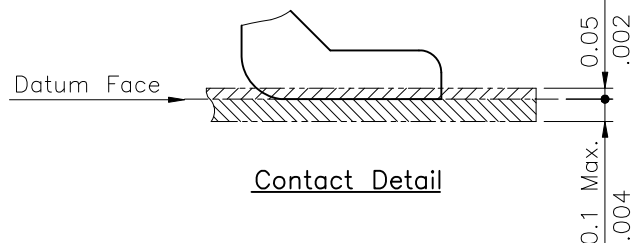


Material :

- * Body : High temperature plastic UL 94V-0
Color Nature
- * Slider : High temperature plastic UL 94V-0
Color Black
- * Contact : Copper alloy with Matte Tin plated
- * Fixed tab : Copper alloy with Matte Tin plated

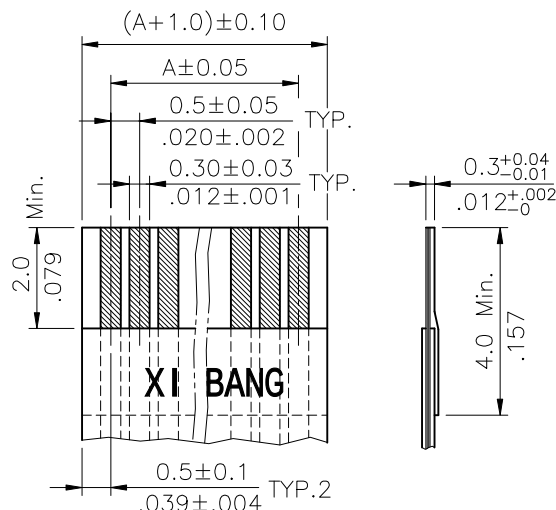

Accommodated FFC/FPC

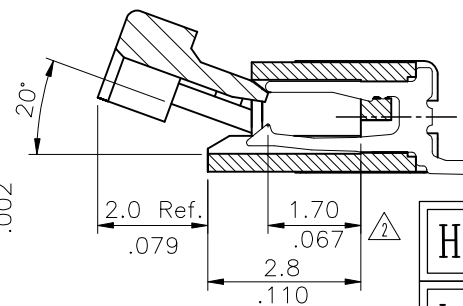

Halogen-Free


Lead Free Process

RoHS Compliant




⑤	Yushu	7/04-19'	ECRB119036/ECNT119159		DATE	UNIT: mm / inch	TITLE: 0.50mm(.031") ZIF FFC/FPC DOWNSIDE CONTACT SURFACE MOUNT CONNECTOR		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
④	Karen	7/14-12'	ECR11040-1/ECN11179/ECN11192/ECN12157-0	DRAWN BY:	Yushu	7/04-19'						
③	Karen	8/25-09'	ECN09434/ECR09116-0	ENGINEER:	Sun	7/11-19'	MATERIAL:					
②	Sandy	11/26-08'	ECN08577	CHECKED BY:	Eisley	7/12-19'						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	7/12-19'			DRAWING NO.	CF2006SF	PART NO.	CF20**1D0*0-NH
									SCALE	7 / 1	SHEET	1 OF 2

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 2000 PCS/Reel

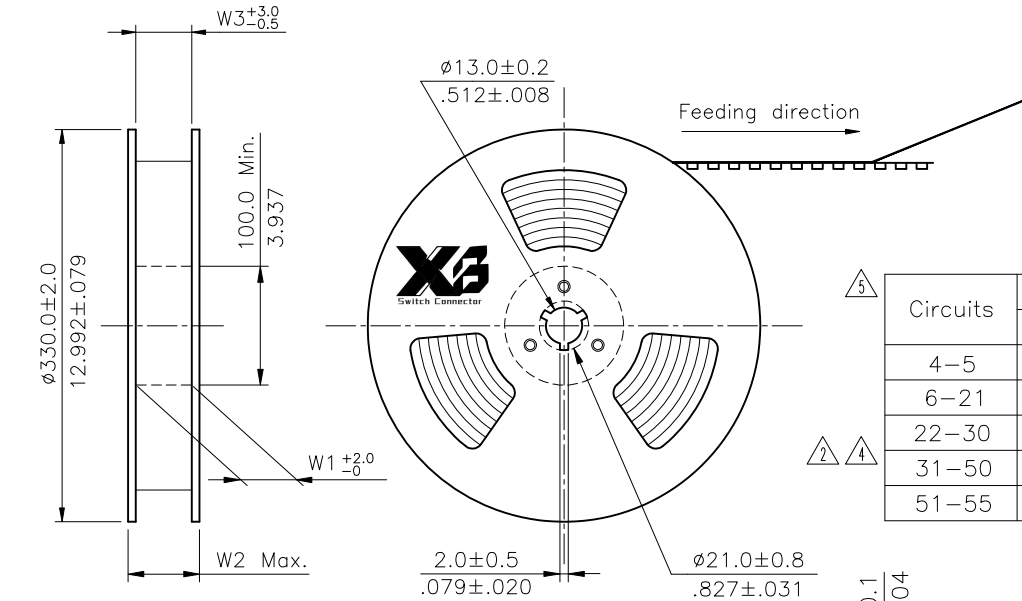

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4-5	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
6-21	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
22-30	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
31-50	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
51-55	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

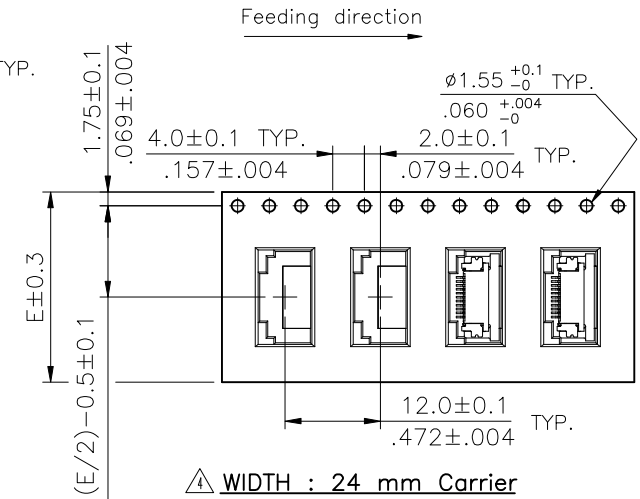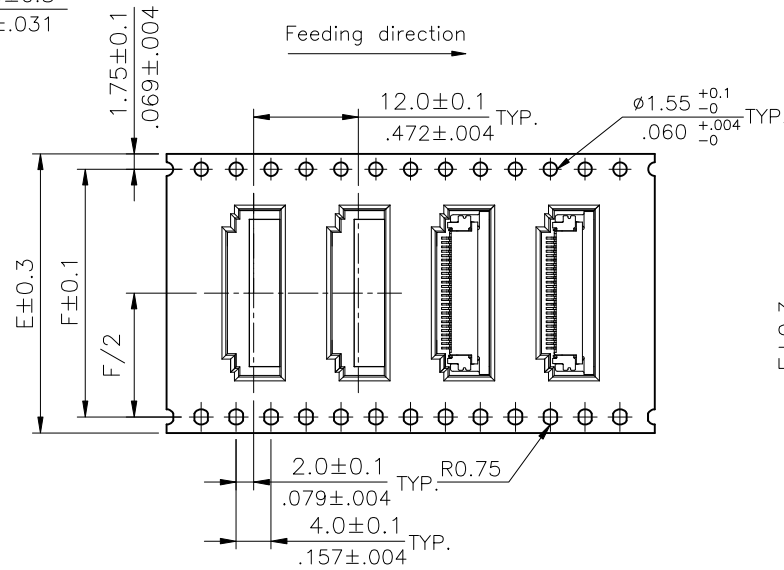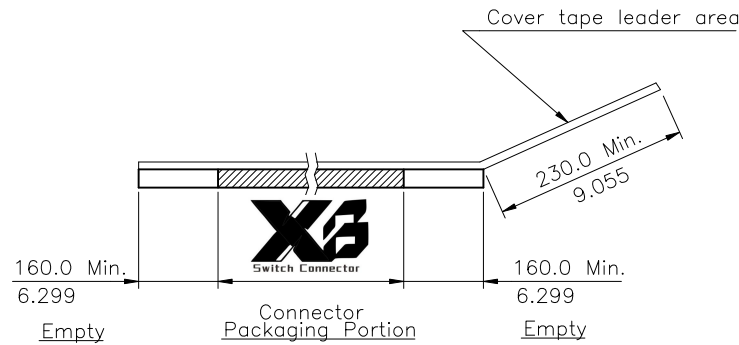

△ WIDTH : 32.44.56 mm Carrier

△ WIDTH : 24 mm Carrier

RoHS Compliant

△5	Yushu	7/04-19'	ECRB119036/ECNT119159			DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") ZIF FFC/FPC DOWNSIDE CONTACT SURFACE MOUNT CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.		
△4	Karen	7/14-12'	ECR11040-1/ECN11179/ECN11192/ECN12157-0	DRAWN BY:	Yushu	7/04-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
△3	Karen	8/25-09'	ECN09434/ECR09116-0	ENGINEER:	Sun	7/11-19'	.X ±	X' ± 1'	MATERIAL:			
△2	Sandy	11/26-08'	ECN08577	CHECKED BY:	Eisley	7/12-19'	.XX ±	.X' ±	FINISH:	DRAWING NO. CF2006SF		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	7/12-19'	.XXX ±	.XX' ±		PART NO. CF20**1D0*0-NH		
										SCALE		SHEET 2 OF 2



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.