

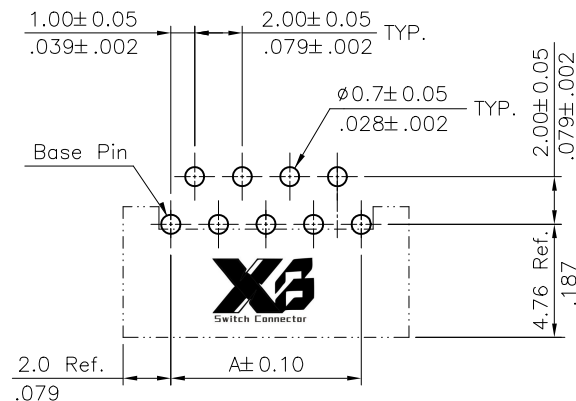


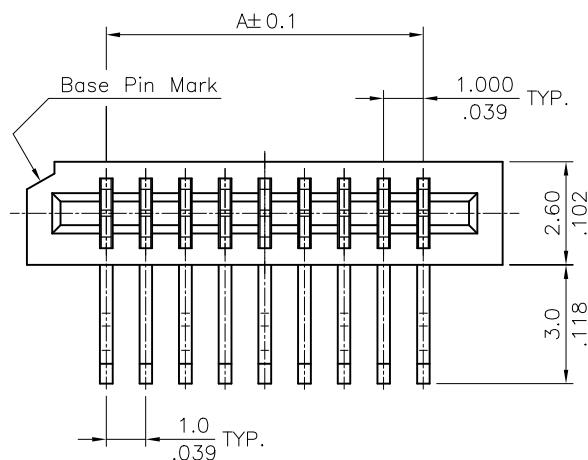

Recommended P.C. Board Layout


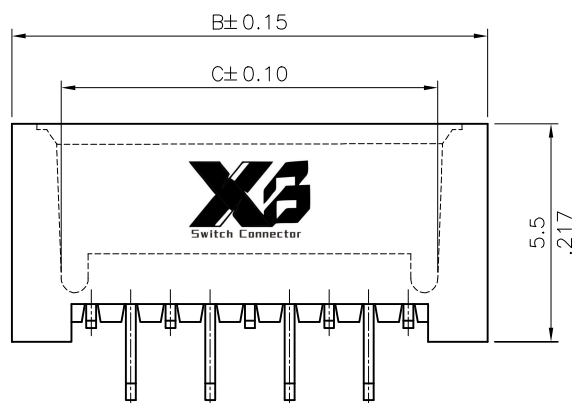


A = 1.00 * No. of Spaces


B = A + 4.0

C = A + 2.1

* Available in 4 through 32 circuits

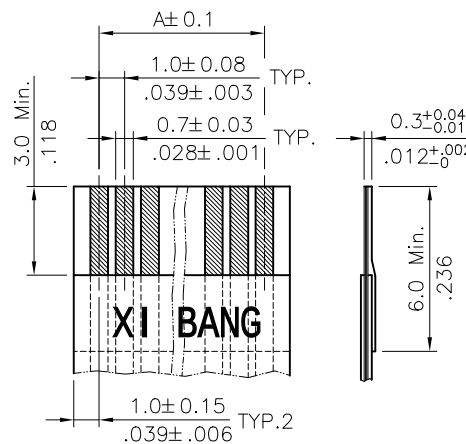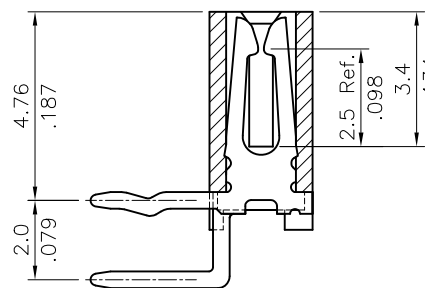

Accommodated FFC

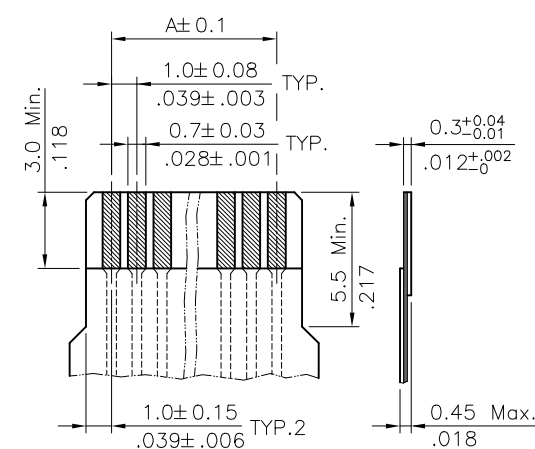

Accommodated FPC

MATERIAL:

* Body: Nylon 6T+30% G.F. UL 94V-0

* Contact : Phosphor Bronze

Ordering Code

CF09 ** 1 H 1 00 -NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

1 = Matte Tin plated over Nickel

④ Contact style: H = Side entry

⑤ Color: 1 = Black

⑥ Other options: 00 = Standard

⑦ -NH = For Lead Free IR Processes and Halogen-Free

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.0mm(.039") R/A DIP TYPE LIF FPC/FFC CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3				DRAWN BY:	Sandy	5/3-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	Sun	5/3-17'		.X ± 0.15/.006 X' ± .1					
1				CHECKED BY:	Eisley	5/8-17'	.XX ± 0.10/.004 X' ± .1						
Sym	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	5/8-17'	.XXX ± 0.05/.002 .XX' ± .1	MATERIAL:	DRAWING NO.	CF0919SA	PART NO.	CF09**1H100-NH	
									FINISH:	SCALE	5 / 1	SHEET	1 OF 1