

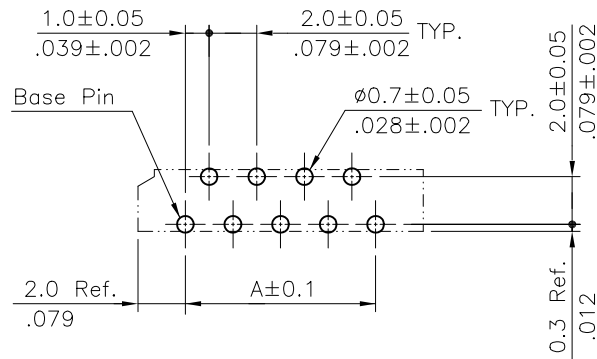
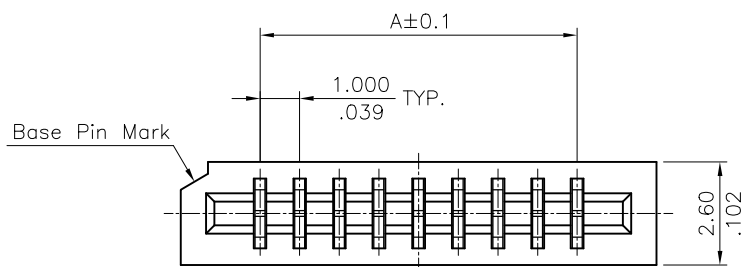
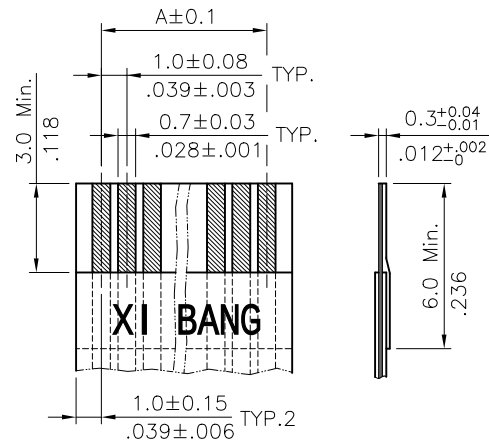


Notes:


- * Body: Nylon 6T UL 94V-0
- * Contact : Phosphor Bronze
- * For Lead Free Wave Flow Process

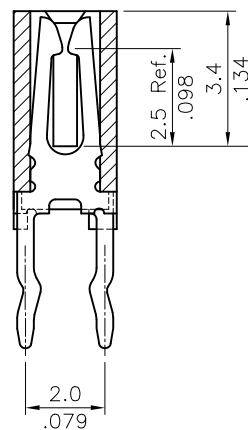

Recommended P.C. Board Layout

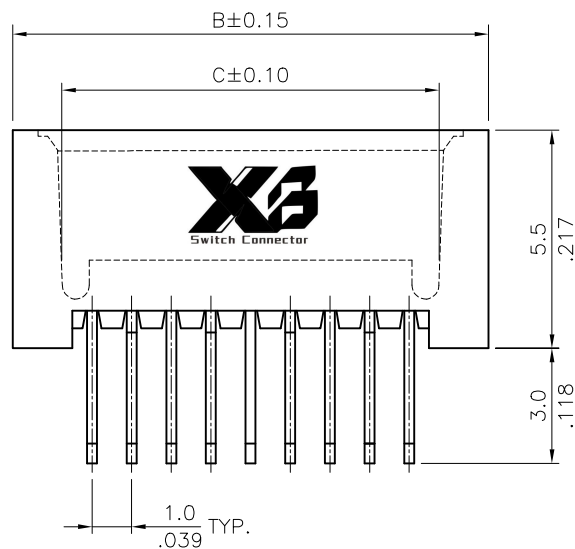

Accommodated FFC

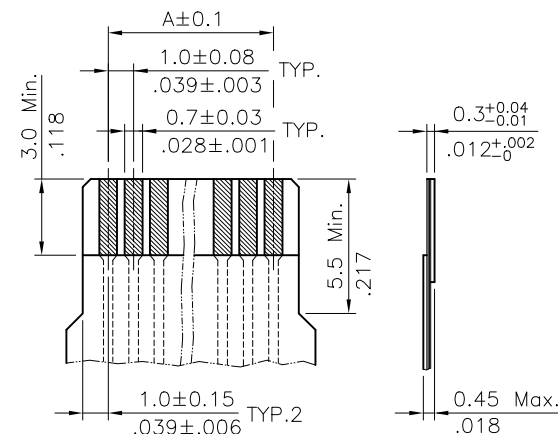

Accommodated FPC

Ordering Code

CF09 ** 1 V 1 00 -NH
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

1= 3.05μm(120μ") Min. Matte Tin
over 1.27μm(50μ") Nickel

④ Contact style: V= Top entry

⑤ Color: 1= Color Black

⑥ Options: 00= Standard

⑦ Other option:

-NH= For Lead Free Wave Flow Process
and Halogen-Free

A = 1.00 * No. of Spaces

B = A + 4.0

C = A + 2.1

* Available in 4 through 32 circuits

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: 1.0mm(.039") DIP TYPE LIF FPC/FFC CONNECTOR MATERIAL: FINISH:	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.						
3				DRAWN BY:	Karen	1/13-15'	TOLERANCE UNLESS OTHERWISE SPECIFIED			DRAWING NO.	CF0924SA	PART NO.	CF09**1V100-NH		
2				ENGINEER:	Sun	1/13-15'				.X ± 0.15/.006	X" ± 1"	SCALE	5 / 1	SHEET	1 OF 1
1				CHECKED BY:	Eisley	1/13-15'				.XX ± 0.10/.004	X" ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	1/13-15'	.XXX ± 0.05/.002	.XX" ±							