

Material:

* Insulation: Nylon 6T UL 94V-0

Color Nature

△ * Slider: Nylon 6T UL 94V-0, Color Brown

* Contact: Phosphor Bronze

Ordering Code

CF10 ** 1 M 0 T 0 - LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1= Matte Tin plated over Nickel

④ Contact type: M= SMT type

⑤ Insulation Color: 0= Nature

⑥ Packing : T= Tube Packaged

⑦ Other option: 0= Standard




⑧ -LF= For Lead Free IR Process

A = 1.00 * No. of Spaces



B = A + 7.2

C = A + 2.1



* Available in 4 through 32 circuits

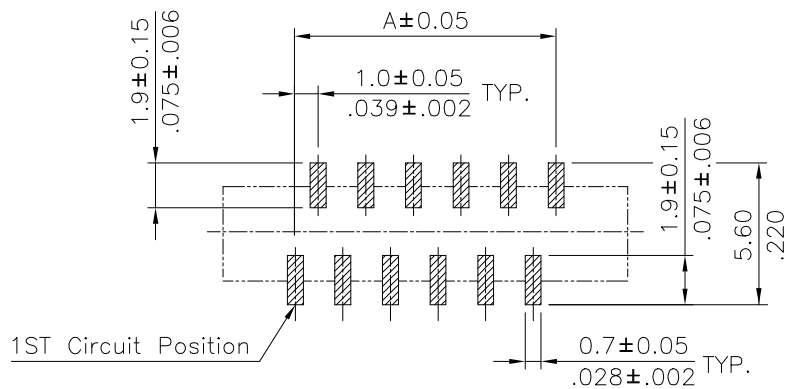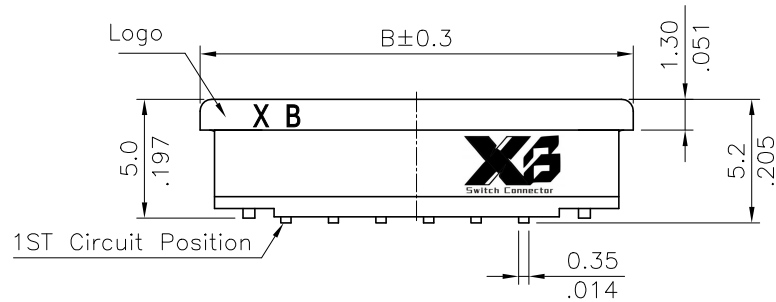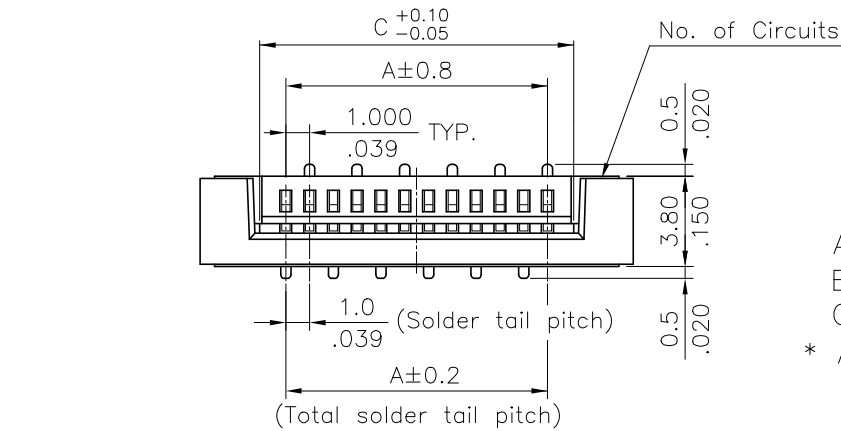

Recommended P.C. Board Layout

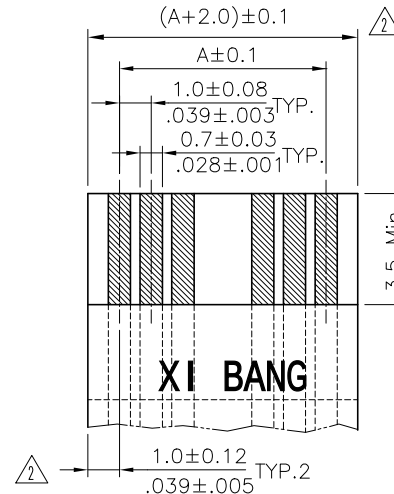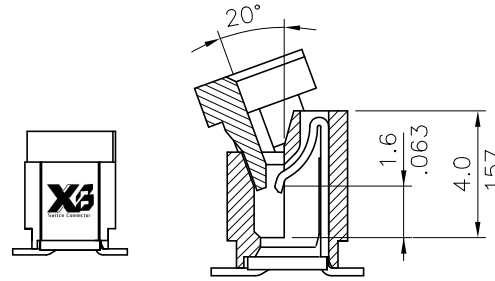

* ACCOMMODATED FFC

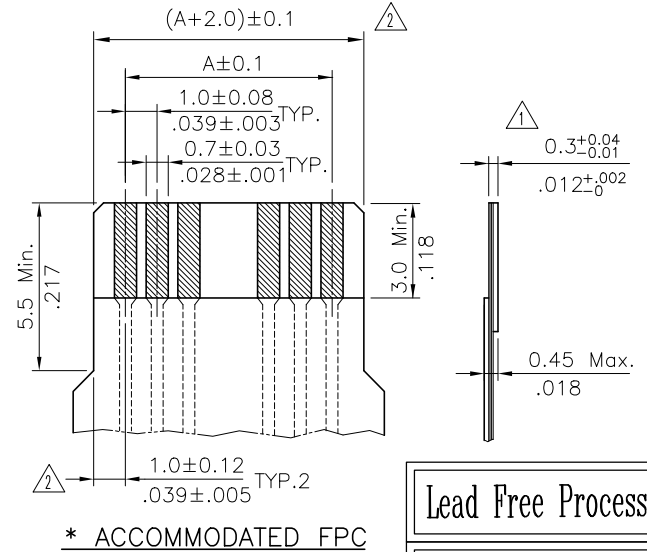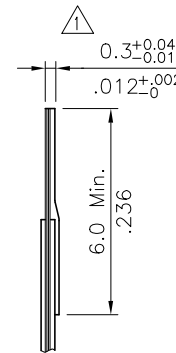


* ACCOMMODATED FPC

Lead Free Process

RoHS Compliant

△4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") SMT TYPE ZIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
△3	Sandy	12/2-10'	ECN10391	DRAWN BY:	Sandy	12/2-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
△2	Bill	3/26-08'	ECR08027-0/ECN08145	ENGINEER:	Clark	12/9-10'	.X ± 0.15/.006	X* ± 1"	MATERIAL:				
△1	Sandy	9/22-07'	ECN07381/ECR07065-1	CHECKED BY:	Eisley	12/10-10'					.XX ± 0.10/.004	.X* ±	DRAWING NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	12/10-10'	.XXX ± 0.05/.002	.XX* ±	FINISH:	SCALE	3 / 1	SHEET	1 OF 1



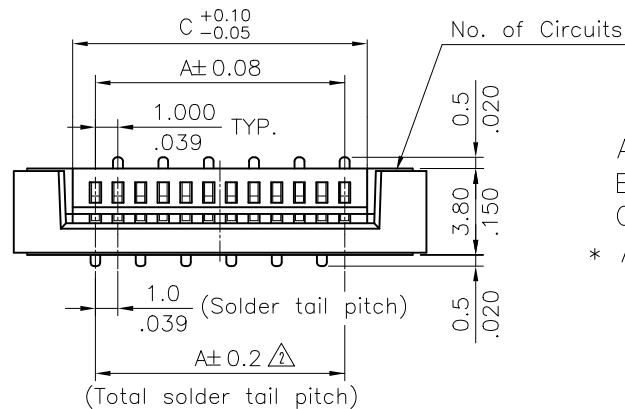


$$A = 1.00 * \text{No. of Spaces}$$


$$B = A + 7.2$$

$$C = A + 2.1$$



* Available in 4 through 32 circuits

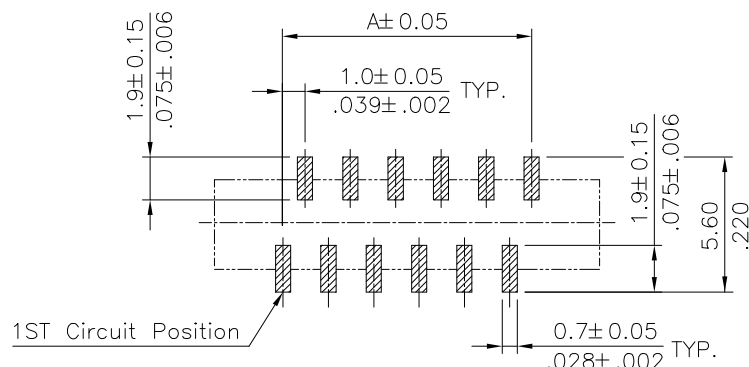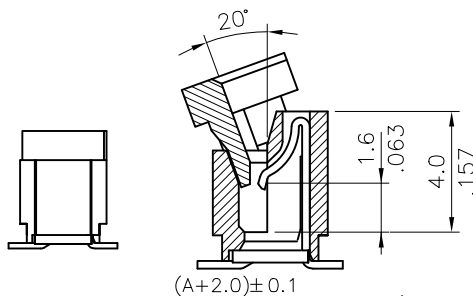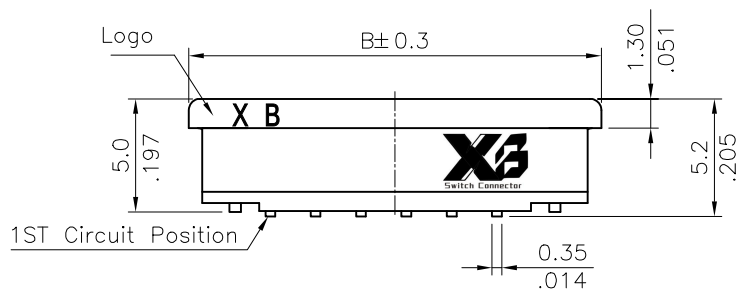

Recommended P.C. Board Layout

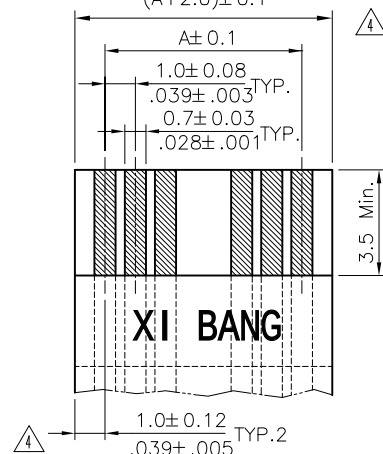

* ACCOMMODATED FFC

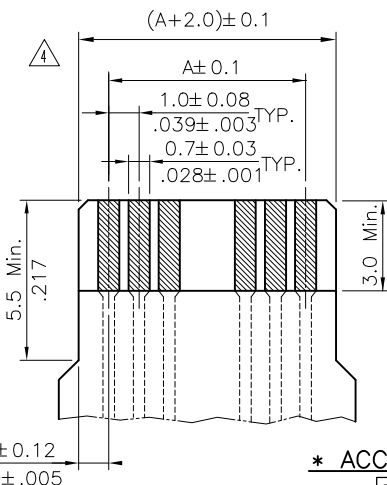

* ACCOMMODATED FPC

RoHS Compliant

Material:

* Insulation: Nylon 6T UL 94V-0
Color Nature

* Slider: Nylon 6T UL 94V-0, Color Brown

* Contact: Phosphor Bronze

Ordering Code

CF10 ** 1 M 0 T 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits

③ Plating code:

1= Matte Tin plated over Nickel



④ Contact type: M= SMT type

⑤ Insulation Color: 0= Nature



⑥ Packing : T= Tube Packaged

⑦ Other option: 0= Standard


⑤	Karen	3/29-18'	ECNT118049/ECRB118006			DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") SMT TYPE ZIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
④	Bill	3/26-08'	ECR08027-0/ECN08145	DRAWN BY:	Karen	3/29-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:	DRAWING NO. CF1004SG	PART NO. CF10**1M0T0
③	Sandy	9/22-07'	ECN07381/ECR07065-1	ENGINEER:	Sun	3/30-18'	.X ± 0.15/.006 X' ± 1"					
②	Sun	10/27/05'	ECN05368	CHECKED BY:	Eisley	4/02-18'	.XX ± 0.10/.004 X ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/02-18'	.XXX ± 0.05/.002 XX ±					

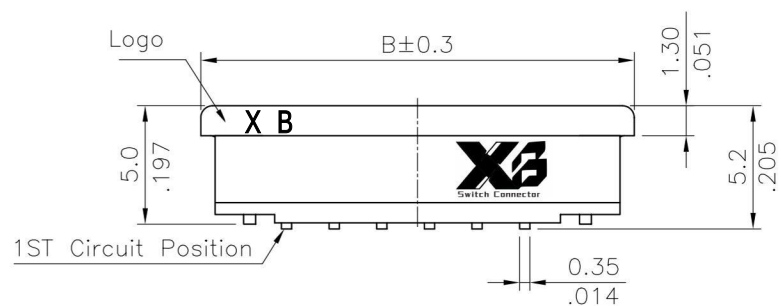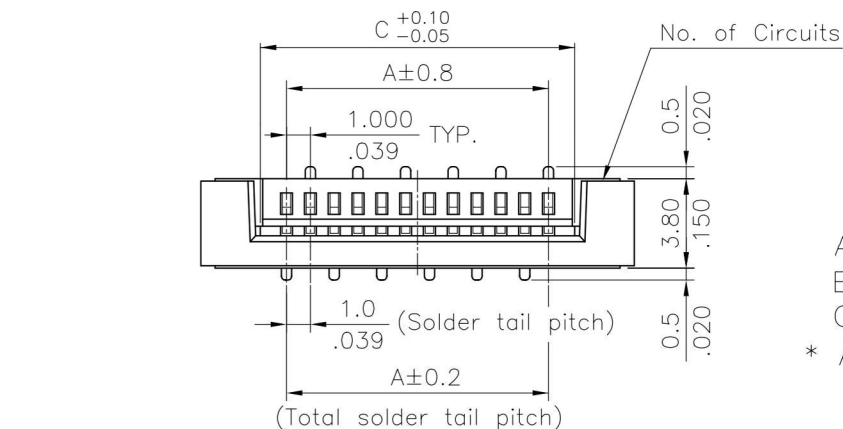

A = 1.00 * No. of Spaces
B = A + 7.2
C = A + 2.1
* Available in 4 through 32 circuits

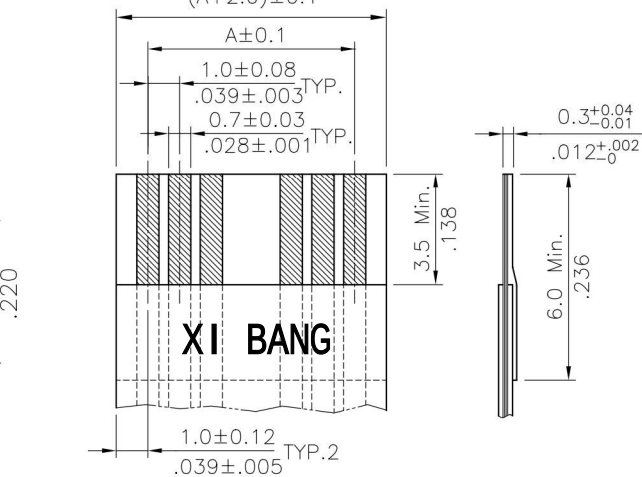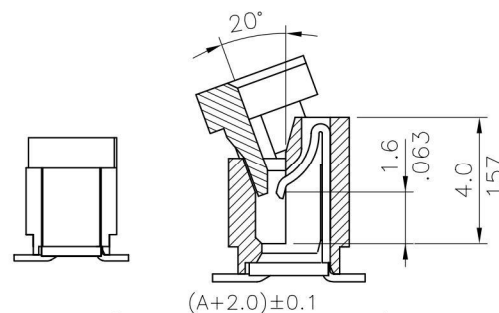

* ACCOMMODATED FFC

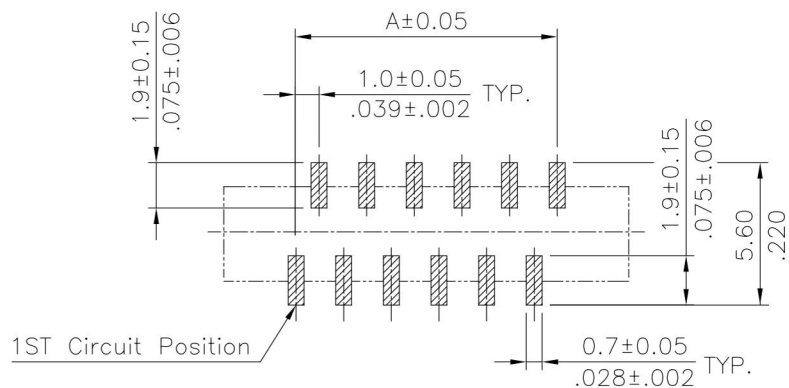

Recommended P.C. Board Layout


Material:

- * Insulation: Nylon 6T With 30% GF.
UL 94V-0, Color Nature
- * Slider: Nylon 6T With 30% GF.
UL 94V-0, Color Black
- * Contact: Phosphor Bronze

Ordering Code

CF10 ** 1 M 0 T 0 - NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
1= Matte Tin plated over Nickel
- ④ Contact type: M= SMT type
- ⑤ Insulation Color: 0= Nature
- ⑥ Packing : T= Tube Packaged
- ⑦ Other option: 0= Standard
- ⑧ -NH= For Lead Free IR Processes and Halogen-Free

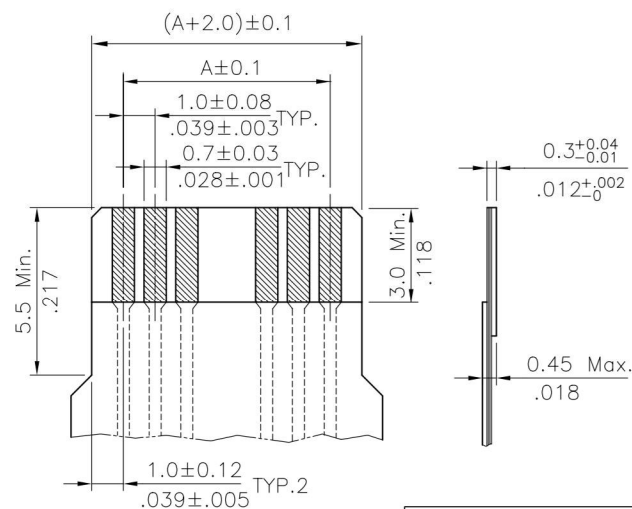

* ACCOMMODATED FPC

Lead Free Process

Halogen-Free

RoHS compliant

4					DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") SMT TYPE ZIF FFC/FPC CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3				DRAWN BY:	Karen	5/7-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:	DRAWING NO.	CF1005SA	PART NO.	CF10**1MOTO-NH
2				ENGINEER:	Eisley	5/15-09'	.X ± 0.15/.006	X' ± 1"			FINISH:			
1				CHECKED BY:	Eisley	5/15-09'	.XX ± 0.10/.004	X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	5/15-09'	.XXX ± 0.05/.002	.XX' ±						

Notes:

- * Insulation: Nylon 6T UL 94V-0
Color Nature
- * Slider: Nylon 6T UL 94V-0,
Color Brown
- * Contact: Phosphor Bronze
- * For Lead Free Wave Flow Process

$$A = 1.00 * \text{No. of Spaces}$$

$$B = A + 7.2$$





$$C = A + 2.1$$

* Available in 4 through 32 circuits


Ordering Code

CF10 ** 2 M 0 T 0 - LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧



- ① Series No.
- ② No. of Circuits
- ③ Plating code:
2= Gold flash plated over
1.27μm(50μ") Nickel
- ④ Contact type: M= SMT type
- ⑤ Insulation Color: 0= Nature
- ⑥ Packing : T= Tube Packaged
- ⑦ Other option: 0= Standard
- ⑧ -LF= For Lead Free IR Process

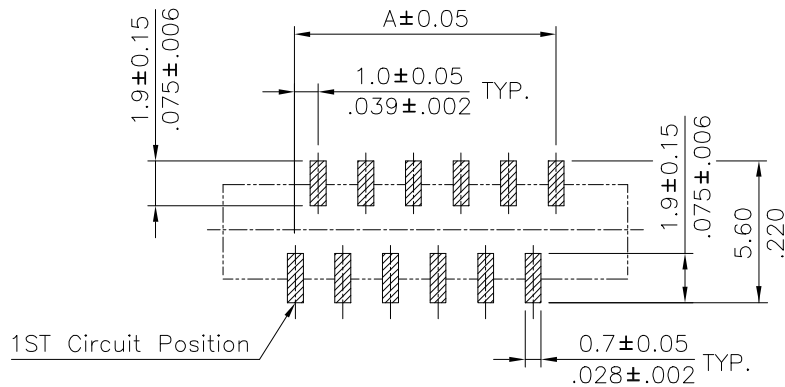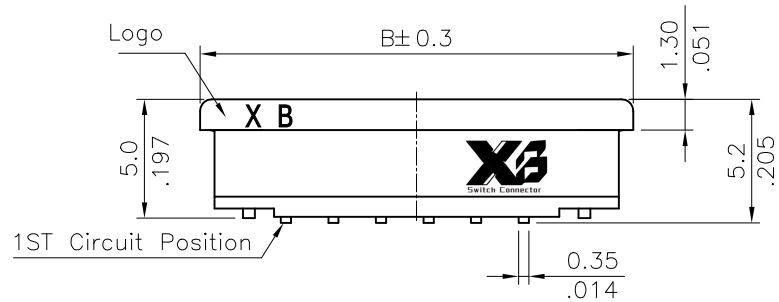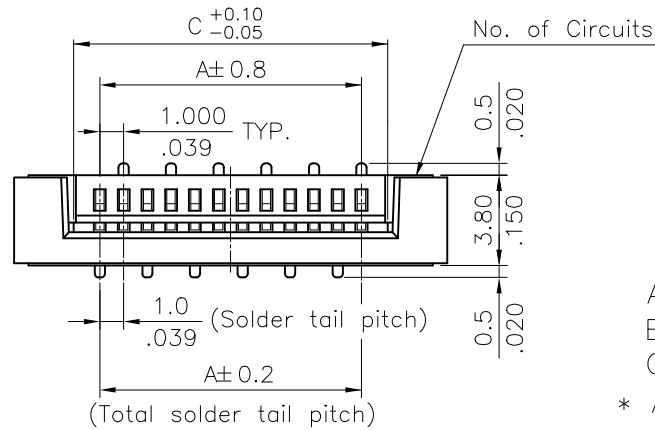

Recommended P.C. Board Layout

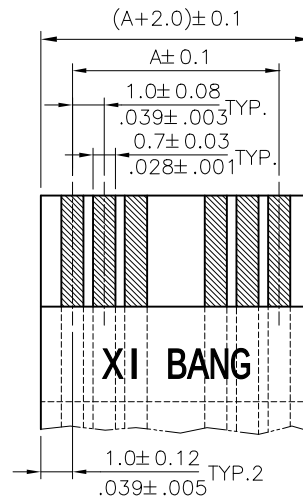

* ACCOMMODATED FFC

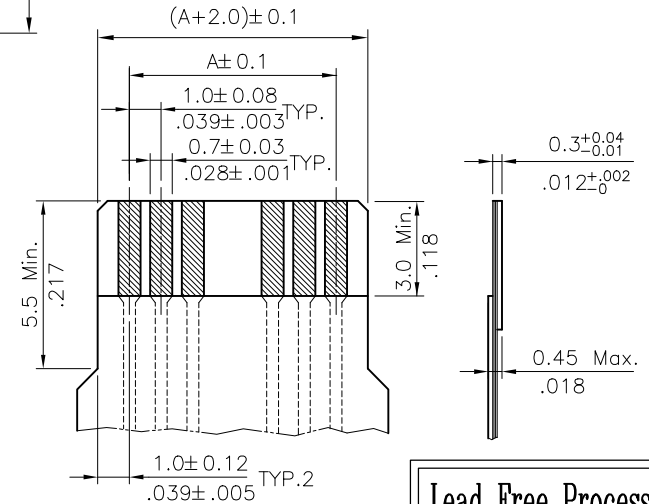

* ACCOMMODATED FPC

Lead Free Process

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") SMT TYPE ZIF FFC/FPC CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
3				DRAWN BY:	Karen	10/21-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CF1029SA	PART NO.
2				ENGINEER:	Sun	10/24-16'	.X ± 0.15/.006	X' ± 1"	FINISH:			SCALE	3 / 1	SHEET
1				CHECKED BY:	Eisley	10/24-16'	.XX ± 0.10/.004	X" ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	10/24-16'	.XXX ± 0.05/.002	.XX ±						