
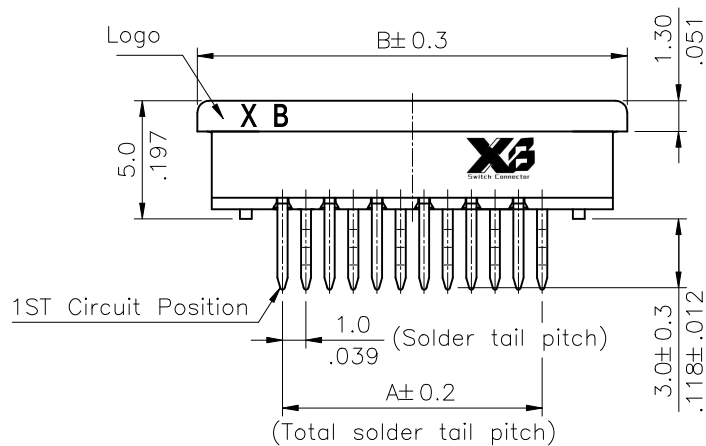


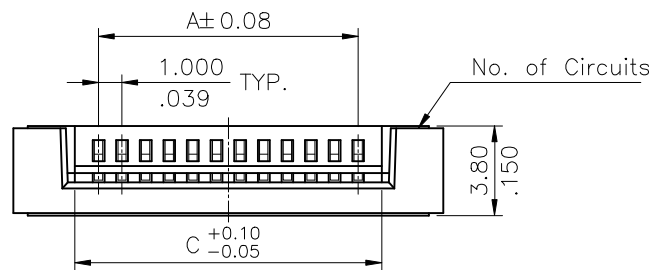


$$A = 1.00 * \text{No. of Spaces}$$

$$B = A + 7.2$$

$$C = A + 2.1$$



* Available in 4 through 32 circuits

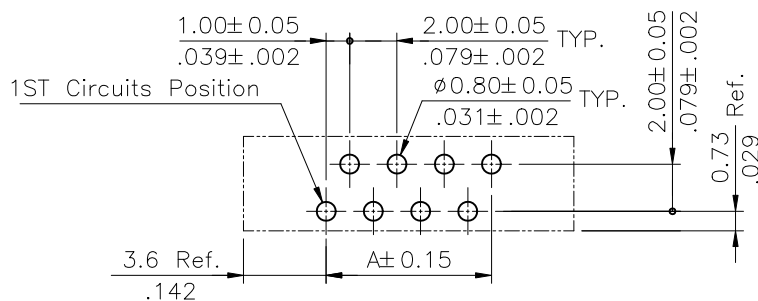

Recommended P.C. Board Layout

Material:

- * Insulation: Nylon 6T With 30% GF.
UL 94V-0, Color Nature
- * Slider: Nylon 6T With 30% GF.
UL 94V-0, Color Black
- * Contact: Phosphor Bronze

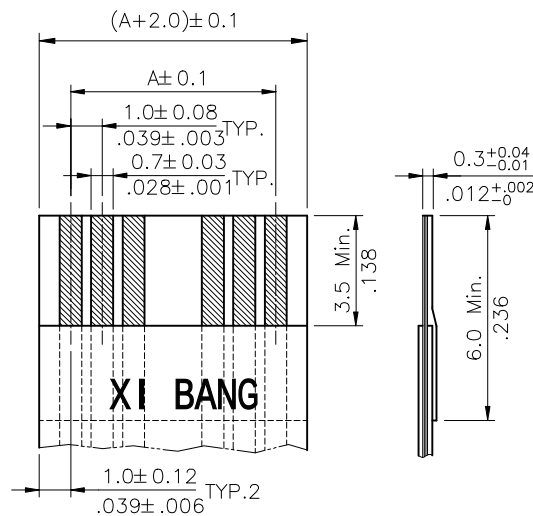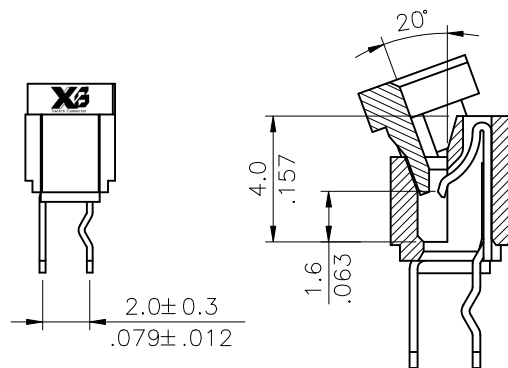


* ACCOMMODATED FFC

Ordering Code

CF10 ** 1 V 0 T 0 -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② No. of Circuits
- ③ Plating code:
1= Tin plated over Nickel
- ④ Contact type: V= Straight DIP type
- ⑤ Insulation Color: 0= Nature
- ⑥ Packing : T= Tube Packaged
- ⑦ Other option: 0= Standard
- ⑧ -NH= For Lead Free IR Processes and Halogen-Free

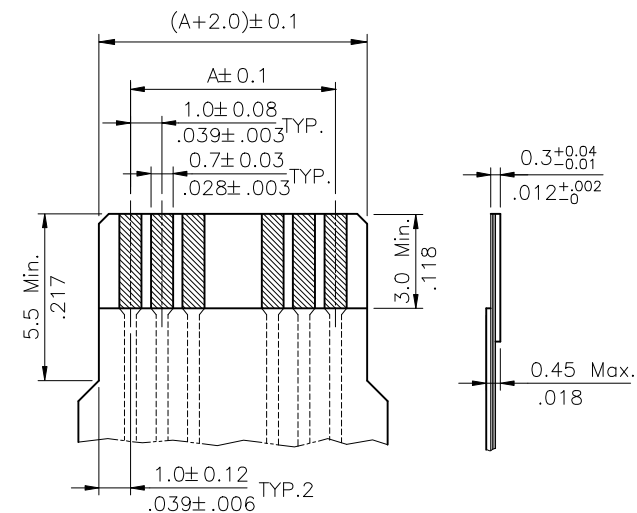


* ACCOMMODATED FPC

Lead Free Process

Halogen-Free

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") ST. DIP TYPE ZIF FFC/FPC CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.		
3				DRAWN BY:	Karen	5/7-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	
2				ENGINEER:	Eisley	5/15-09'	.X ± 0.15/.006	X' ± 1"	FINISH:			
1				CHECKED BY:	Eisley	5/15-09'	.XX ± 0.10/.004	X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	5/15-09'	.XXX ± 0.05/.002	.XX ±		DRAWING NO. CF1006SA	PART NO. CF10**1V0T0-NH	
										SCALE	3 / 1	SHEET 1 OF 1

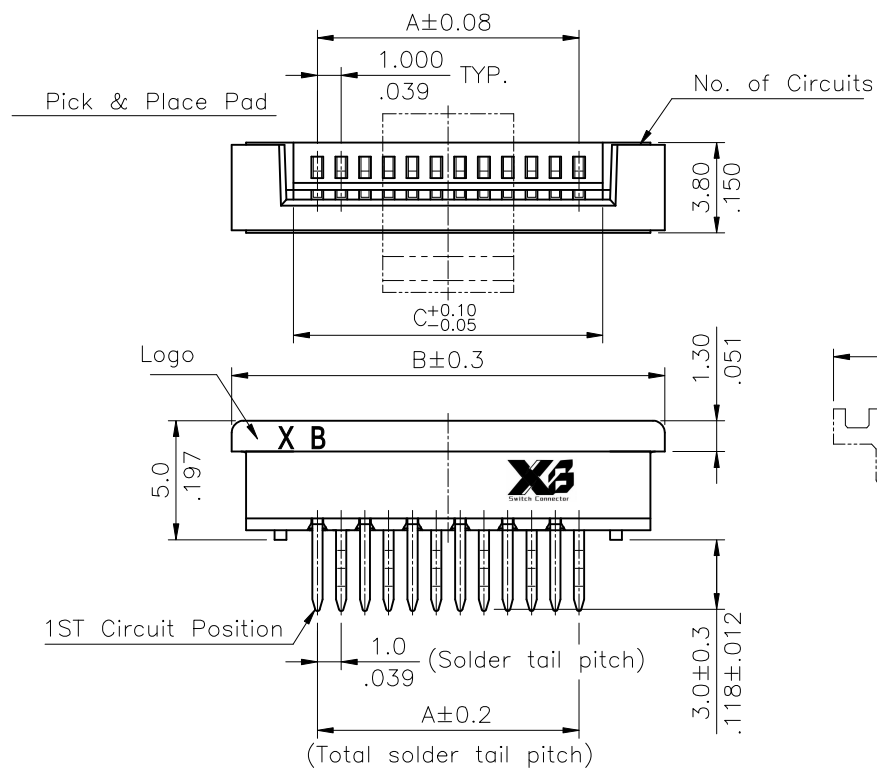


A = 1.00 * No. of Spaces



B = A + 7.2

C = A + 2.1



* Available in 4 through 32 circuits

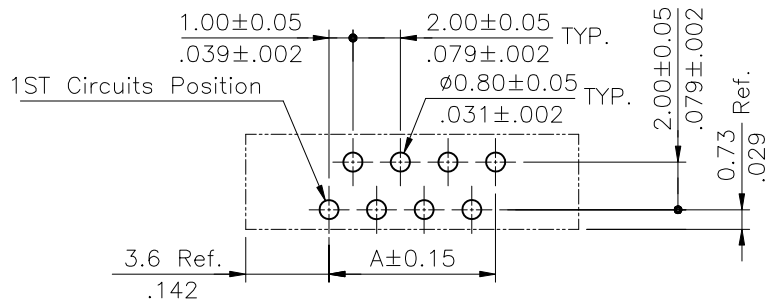

Recommended P.C. Board Layout

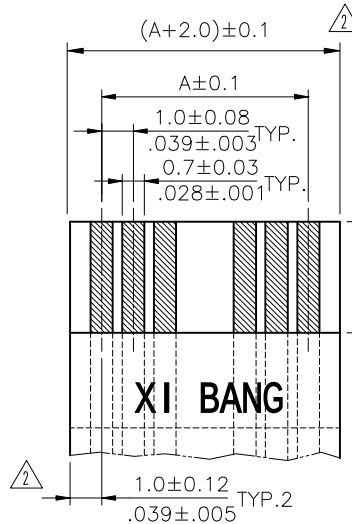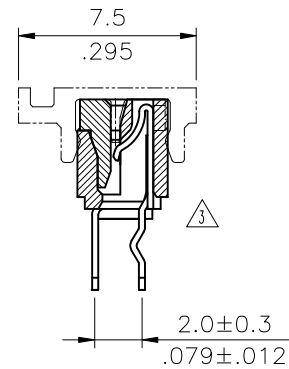

* ACCOMMODATED FFC

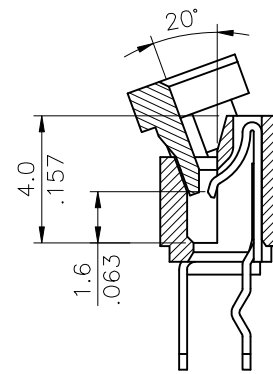

Material:

* Insulation: Nylon 6T UL 94V-0, Color Nature

* Slider: Nylon 6T UL 94V-0, Color Brown

* Contact: Phosphor Bronze

△ * PAD: Nylon 6T UL 94V-0, Color Black

Ordering Code

CF10 ** 1 V 0 * 0 -LF
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1= Matte Tin plated over Nickel

④ Contact type: V= Straight DIP type


⑤ Insulation Color: 0= Nature

△ ⑥ Packing : T= Tube Packaged


R= Reel Packaged(With PAD)

⑦ Option: 0= Standard

⑧ -LF=For Lead Free IR Process

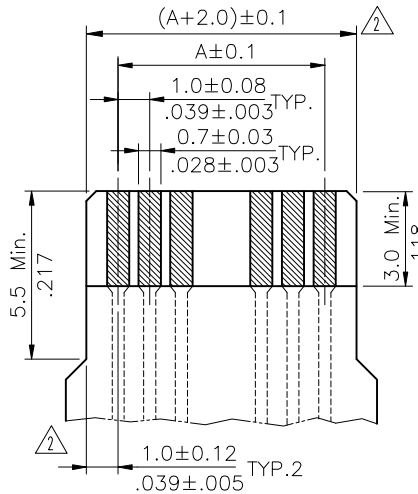

* ACCOMMODATED FPC



Lead Free Process

RoHS Compliant

4	Kenny	8/24-20'	ECNT120223			DATE	UNIT: mm / inch		TITLE: 1.00mm(.039") ST. DIP TYPE ZIF FFC/FPC CONNECTOR	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3	Karen	8/25-09'	ECN09431	DRAWN BY:	Kenny	8/24-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED								
2	Bill	3/26-08'	ECR08027-0/ECN08145	ENGINEER:	Sun	8/25-20'	.X ± 0.15/.006	X' ± 1"	MATERIAL:						
1	Sandy	9/22-07'	ECN07381/ECR07065-1	CHECKED BY:	Eisley	8/25-20'	.XX ± 0.10/.004	.X" ±	FINISH:						
SYM	NAME	DATE	REVISIONS		APPROVED BY:	Eisley	8/25-20'	.XXX ± 0.05/.002	.XX' ±		DRAWING NO.	CF1023SE	PART NO.	CF10**1V0*0-LF	
										SCALE	3 / 1	SHEET	1	OF	1