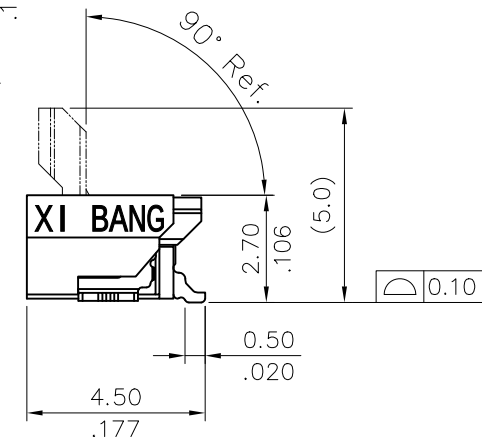
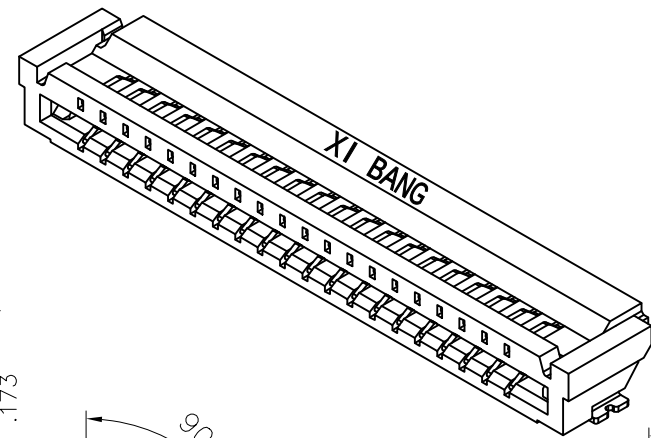
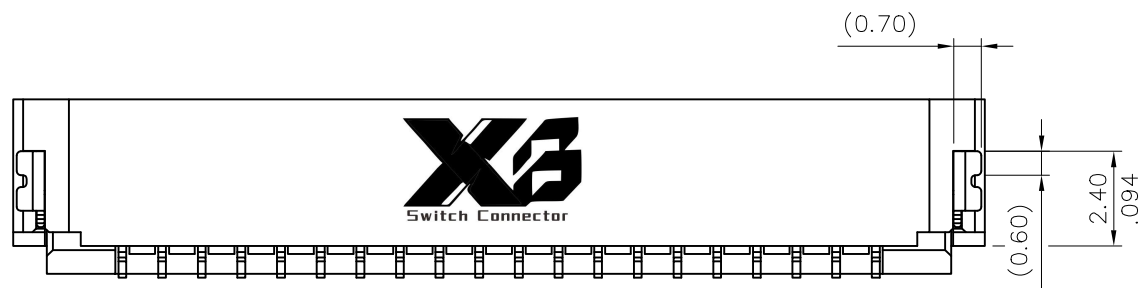
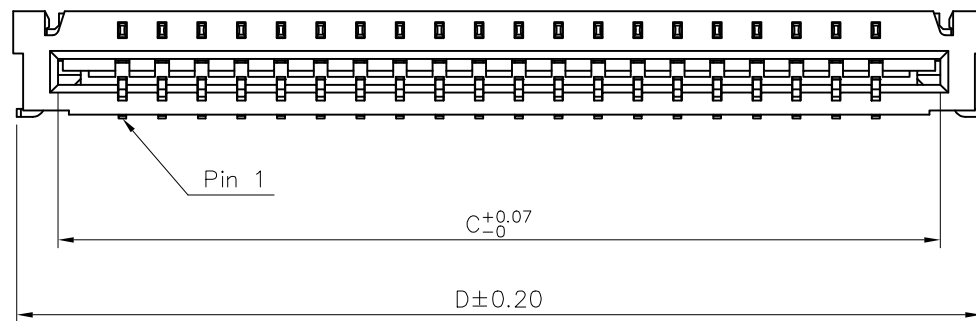
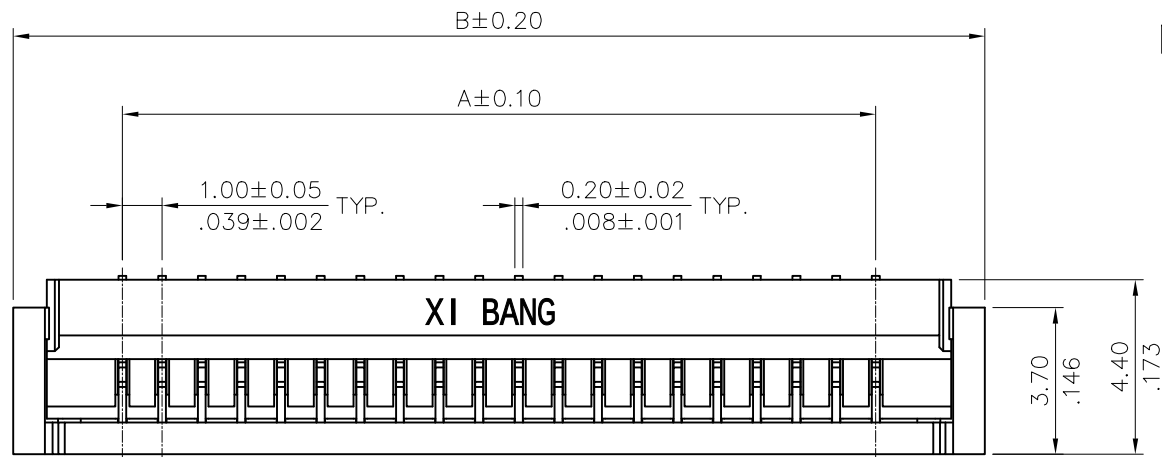


Dim.A = 1.00 x No. of Spaces

Dim.B = Dim.A + 5.5

Dim.C = Dim.A + 3.25

Dim.D = Dim.A + 5.3

* Available in 04 through 20 circuits

Lead Free Process

Halogen-Free

RoHS Compliant

4					DATE	UNIT: mm / inch
3				DRAWN BY: Clark	8/4-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED
2				ENGINEER: Clark	8/4-16'	.X ± 0.25/.010 X' ± 1'
1	Clark	08/03-16	ECNT116165	CHECKED BY: David	8/9-16'	.XX ± 0.15/.006 .X' ±
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	8/9-16'	.XXX ± 0.10/.004 .XX' ±

TITLE: 1.00mm(.039") ZIF FFC/FPC
ONE-TOUCH CONNECTOR


MATERIAL:

FINISH:




东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

DRAWING NO.	CF1108SA	PART NO.	CF11**1D0*C-10-NH
SCALE	5 / 1	SHEET	1 OF 3

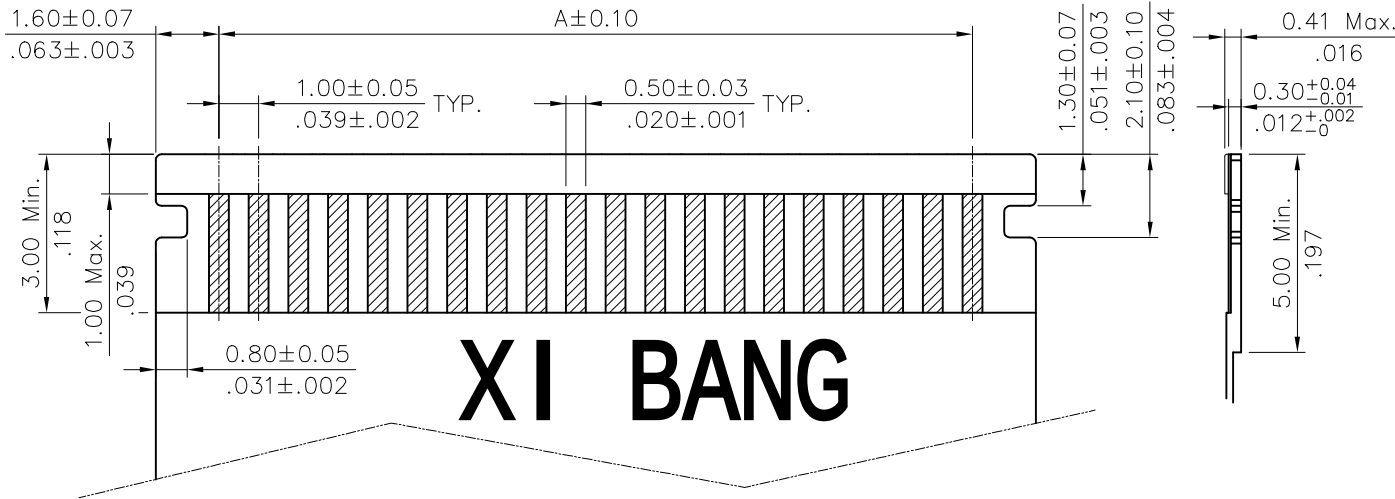

XI BANG

Accommodated FFC/FPC

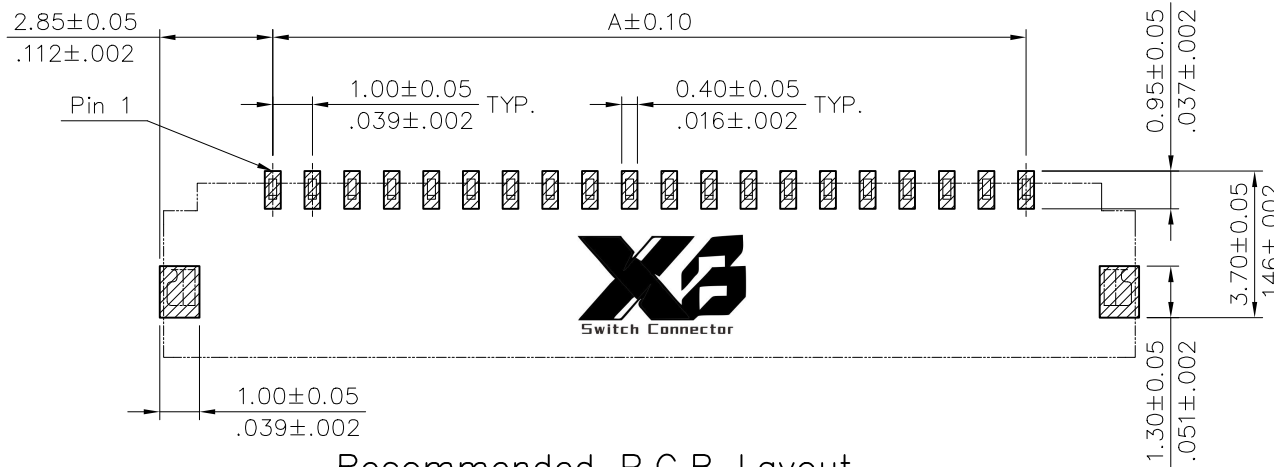

X3
Switch Connector

Recommended P.C.B Layout


Material :

- * Body : High temperature plastic UL 94V-0 Color Nature
- * Cover : High temperature plastic UL 94V-0 Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Tin Plated

Ordering Code

CF11 08 1 D 0 * C - 10 - NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② No. of Circuits: 04~20 Pin
- ③ Plating code:
1= Matte Tin plated over Nickel
- ④ Contact style: D= Downside contact
- ⑤ 0= Color Nature
- ⑥ Other option: R= Tape & Reel
T= Tube Packing
- ⑦ C= Type C
- ⑧ 10= Pitch 1.00mm
- ⑨ NH= For Leadfree IR Processes and Halogen-Free

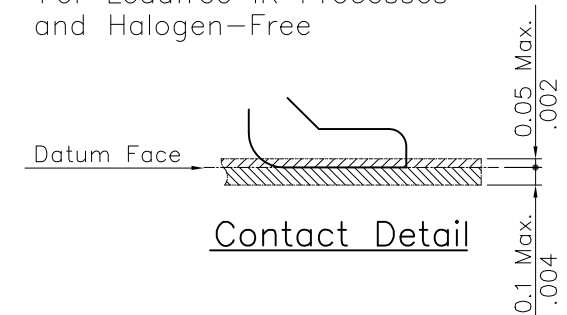


Lead Free Process

Halogen-Free

RoHS Compliant



4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		DRAWING NO. CF1108SA PART NO. CF11**1D0*C-10-NH	
3				DRAWN BY: Clark	8/4-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER: Clark	8/4-16'	.X ± 0.25/.010 X' ± 1'	FINISH:	SCALE 5 / 1 SHEET 2 OF 3			
1	Clark	08/03-16	ECNT116165	CHECKED BY: David	8/9-16'	.XX ± 0.15/.006 X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	8/9-16'	.XXX ± 0.10/.004 X' ±					

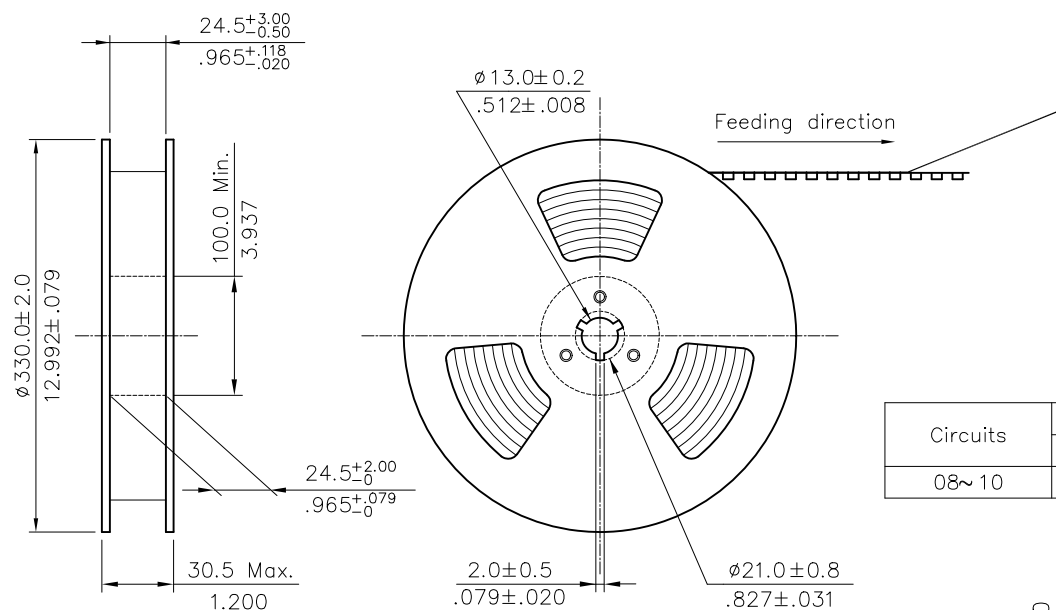

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : $0.1\text{N} - 1.3\text{N}$
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements.
- * Quantity : 1500 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
08~10	24.0(.945)	---	24.5(.965)	30.5(1.200)	24.5(.965)	9

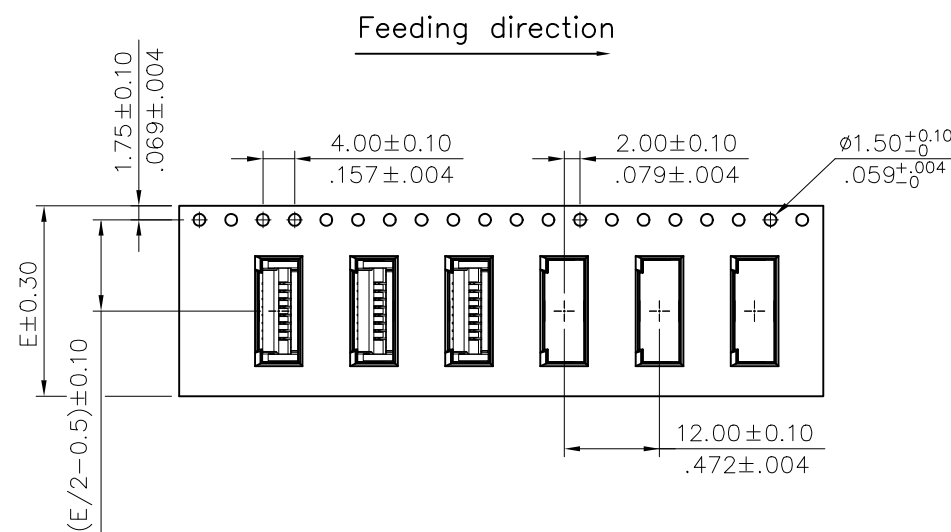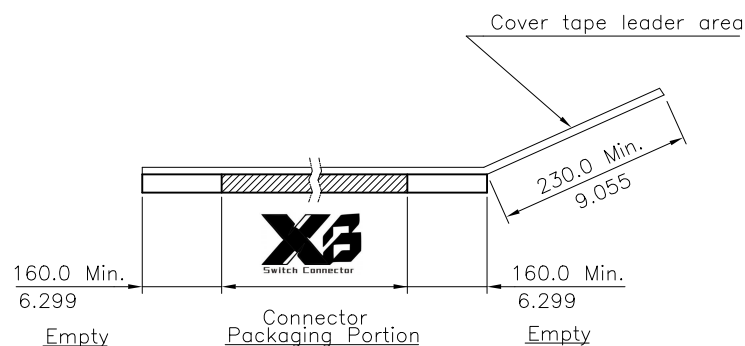

WIDTH : 24 mm Carrier

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 1.00mm(.039") ZIF FFC/FPC ONE-TOUCH CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Clark	8/4-16'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2				ENGINEER:	Clark	8/4-16'	.X ±	MATERIAL:			
1	Clark	08/03-16	ECNT116165	CHECKED BY:	David	8/9-16'	.XX ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	8/9-16'	.XXX ±	FINISH:			
								DRAWING NO.	CF1108SA	PART NO.	CF11**1D0*C-10-NH
								SCALE		SHEET	3 OF 3