

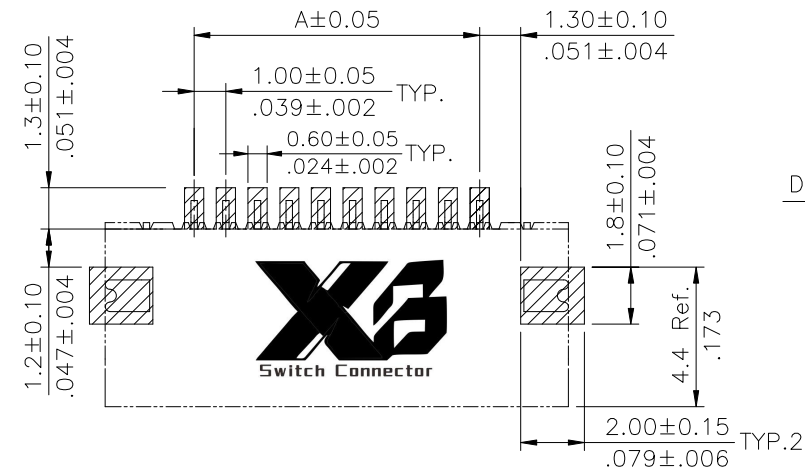
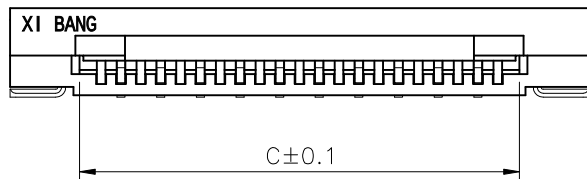
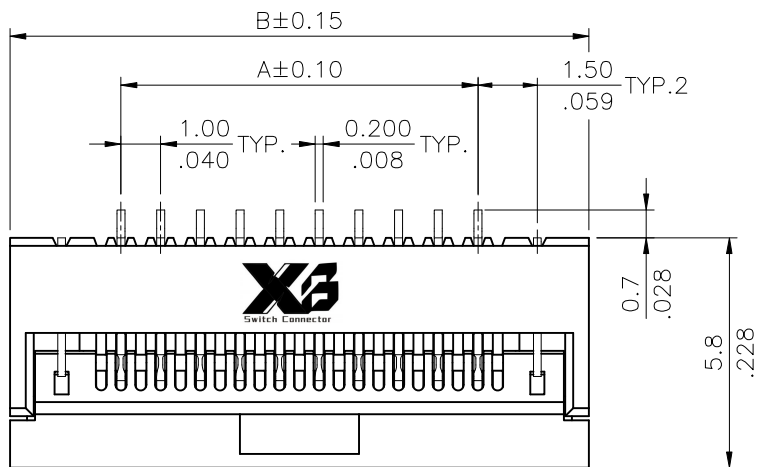
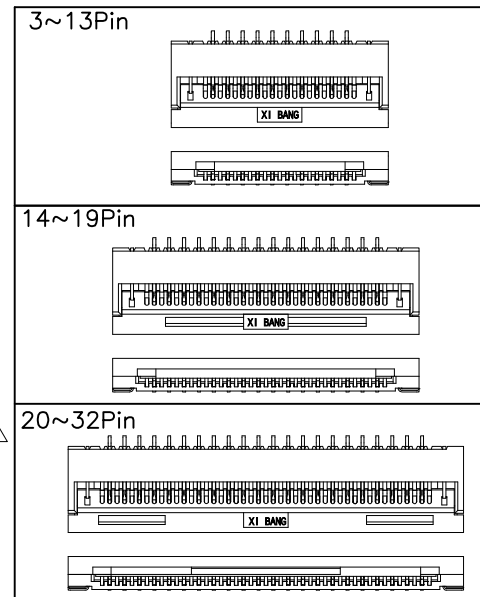
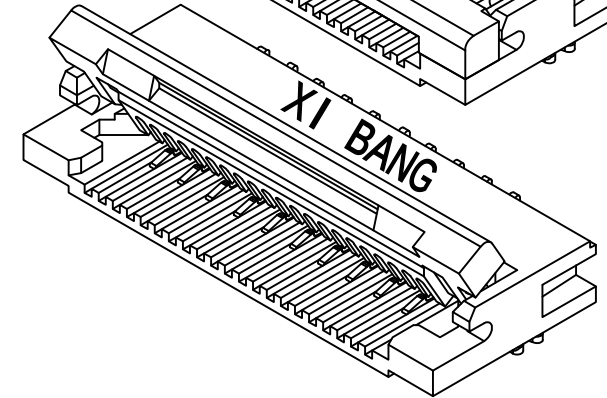
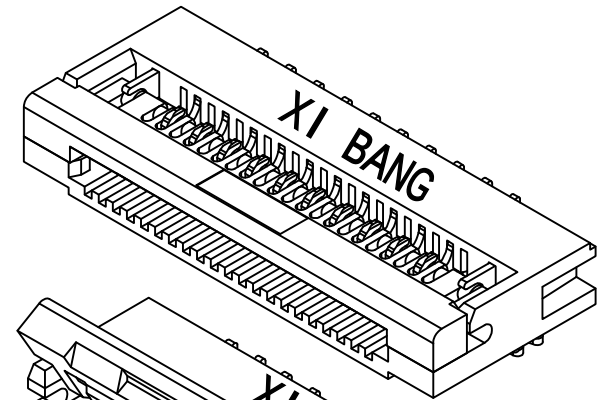


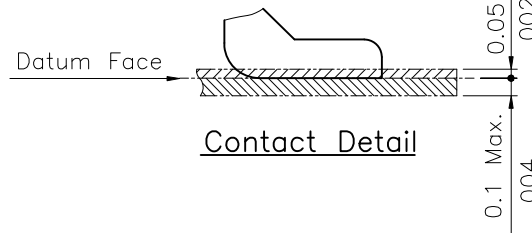

Recommended P.C. Board Layout

NOTE :

- * Body :High temperature plastic UL 94V-0, Color Nature
- * Slider :High temperature plastic UL 94V-0 Color Black
- * Contact : Phosphor Bronze
- * Fixed tab : Brass with Matte Tin Plated

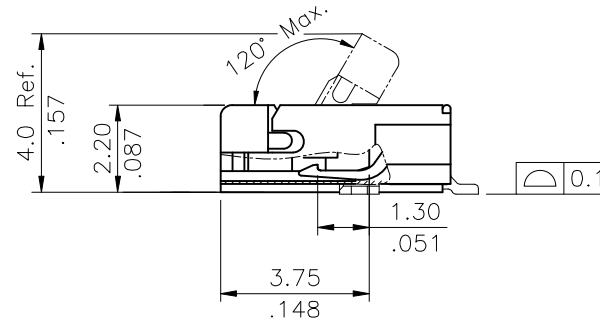

Halogen-Free

Lead Free Process

RoHS compliant

7	Karen	3/14-22'	ECNT122032/ECRB122004		DATE	UNIT: mm / inch		TITLE: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR					
6	Karen	10/02-15'	ECNT115233	DRAWN BY:	Karen	3/31-22'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
5	Steven	2/5-13'	ECN13035-0	ENGINEER:	Sun	3/31-22'	.X ± 0.20/.008 .XX ± 0.10/.004 .XXX ± 0.05/.002	X' ± 1" .X' ± .XX' ±	MATERIAL:				
4	Enya	11/06-12'	ECN12272-0/ECR12080-1	CHECKED BY:	Eisley	4/1-22'							
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/1-22'			FINISH:	DRAWING NO.	CF2567SG	PART NO.	CF25***D0**-10-NH
										SCALE	5 / 1	SHEET	1 OF 3

Ordering Code

CF25 ** * D 0 * * - 10 - NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

A = 1.00 x No. of Spaces

B = A + 5.6

C = A + 2.1

D = A + 2.0

E = A + 3.6

F = A + 3.1

⑤⑥⑦ *(Available : 04,06,07,08,09,10,12,13,16,22,26,30,32)

* Circuits not found above
please consult manufacturer *

① Series No.

② No. of Circuits:

③ Plating code:

1= 120μ"min. Matte Tin plated over 50μ"min. Nickel

F= Selective Gold flash plated over Nickel

④ Contact style: D= Downside contact

⑤ Color: 0= Nature

⑥ Packing option: R= Tape & Reel , T= Tube


⑦ Other option:

D: Accommodated FFC/FPC(TYPE1)


E: Accommodated FFC/FPC(TYPE2)

⑧ Pitch: 10= 1.00 mm

⑨ -NH= For Leadfree IR Processes and Halogen-Free

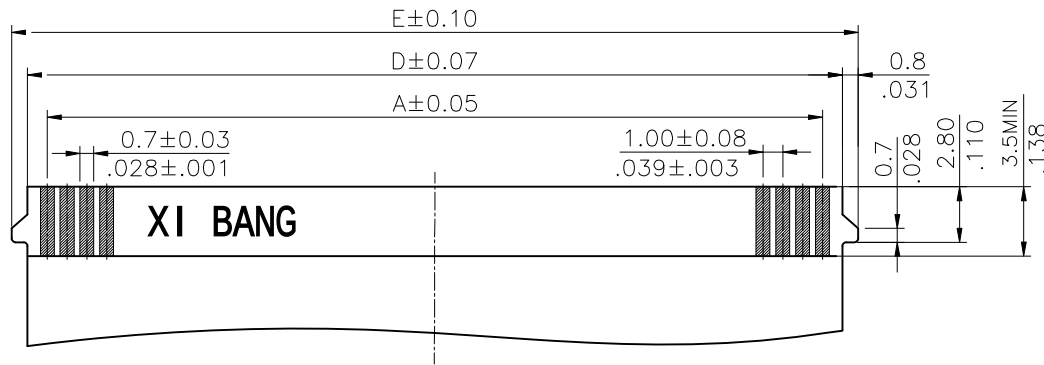

Accommodated FFC/FPC(TYPE1)

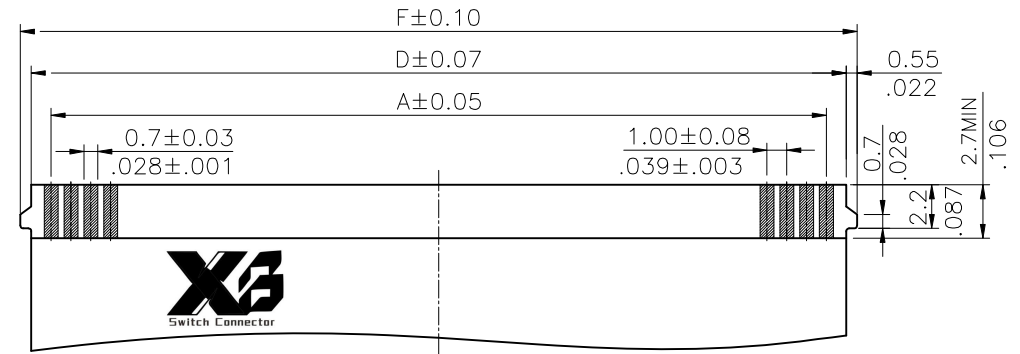


Accommodated FFC/FPC(TYPE2)

Lead Free Process

Halogen-Free

RoHS compliant



⑦	Karen	3/14-22'	ECNT122032/ECRB122004		DATE	UNIT: mm / inch	TITLE: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR	DRAWING NO. CF2567SG PART NO. CF25***D0**-10-NH SCALE 10 / 1 SHEET 2 OF 3			
⑥	Karen	10/02-15'	ECNT115233	DRAWN BY:	Karen	3/31-22'					
⑤	Steven	2/5-13'	ECN13035-0	ENGINEER:	Sun	3/31-22'					
④	Enya	11/06-12	ECN12272-0/ECR12080-1	CHECKED BY:	Eisley	4/1-22'					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/1-22'	MATERIAL:				
							FINISH:				

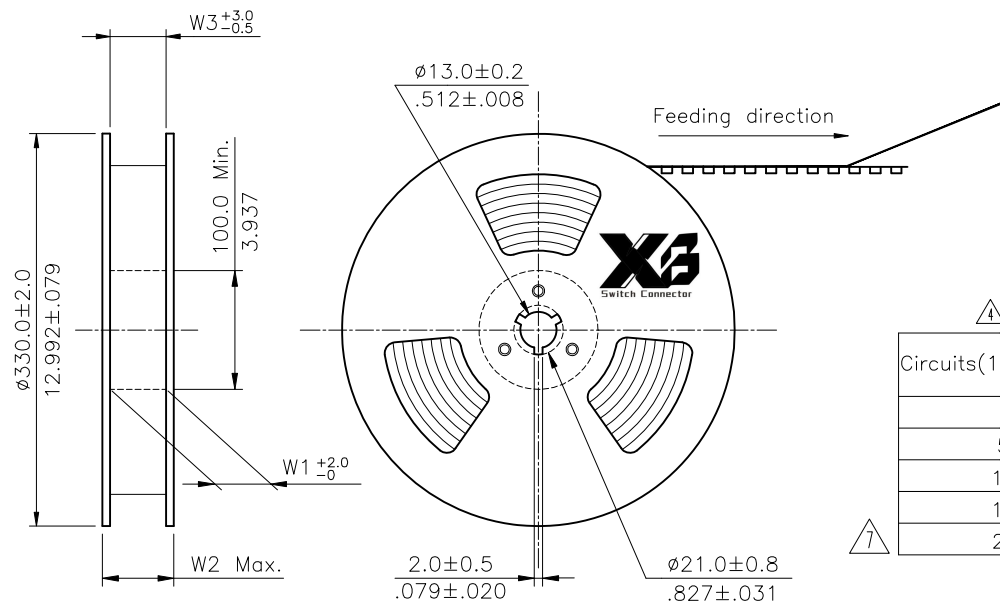


NOTES:

1. 10 sprocket hole pitch cumulative tolerance ± 0.20
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Corrugated Paper
4. All dimensions meet EIA-481 requirements.
5. Thickness : 0.35 ± 0.05 mm.
6. Component load per 13" Reel : 2000 pcs.

Circuits(1.0mm Pitch)	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4	16.0(.630)	—	16.5(.650)	22.5(.886)	16.5(.650)	11
5-12	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
13-16	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
17-28	44.0(1.732)	40.40(1.596)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
29-32	56.0(2.205)	52.50(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	4

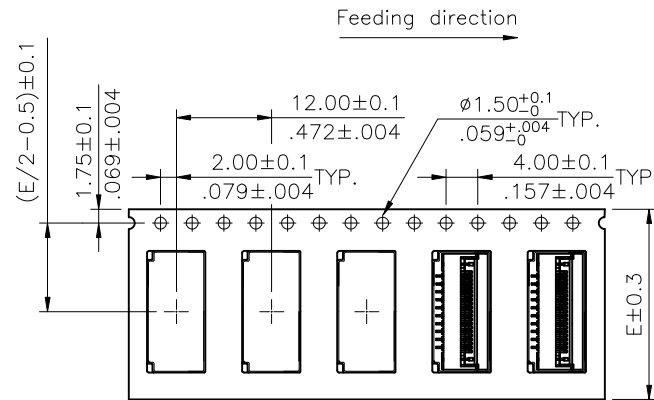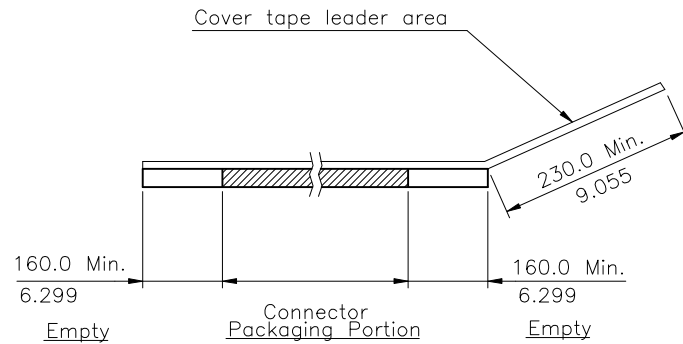

WIDTH : 16.24 mm Carrier

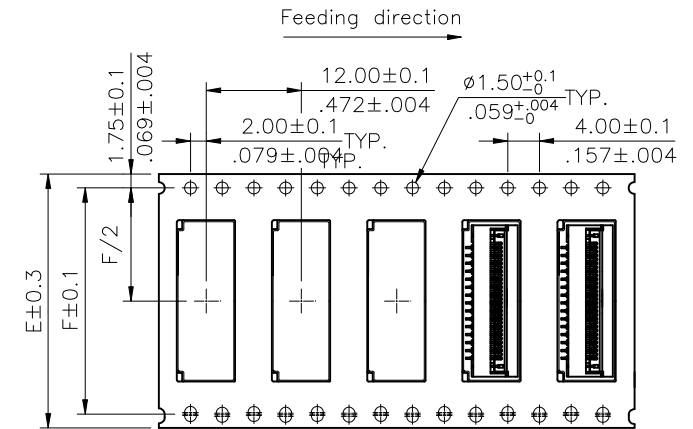

WIDTH : 32.44,56 mm Carrier

RoHS Compliant

7	Karen	3/14-22'	ECNT122032/ECRB122004		DATE	UNIT: mm / inch	TITLE: 1.0mm(.040") ZIF FFC/FPC ONE-TOUCH CONNECTOR
6	Karen	10/02-15	ECNT115233	DRAWN BY:	Karen	3/31-22'	
5	Steven	2/5-13'	ECN13035-0	ENGINEER:	Sun	3/31-22'	MATERIAL:
4	Enya	11/06-12	ECN12272-0/ECR12080-1	CHECKED BY:	Eisley	4/1-22'	
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/1-22'	FINISH:



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO.	CF2567SG	PART NO.	CF25***D0**-10-NH
SCALE	1 / 1	SHEET	3 OF 3