
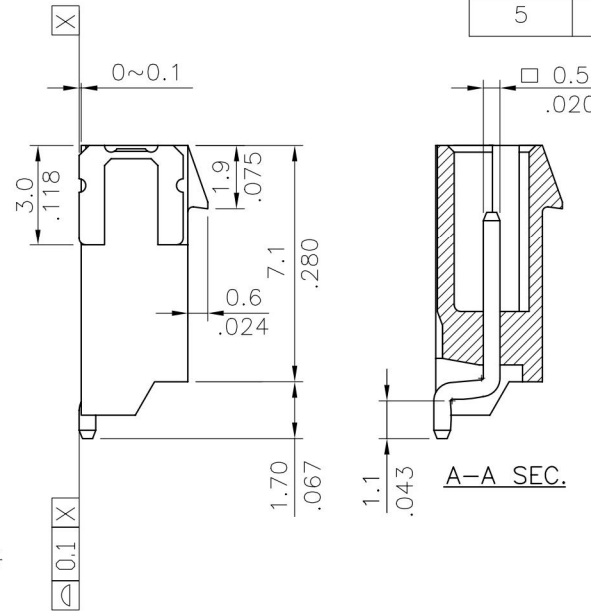


Material:
 Insulator:
 Nylon 6T + 30% G.F UL 94V-0
 Color Nature
 Contact: Brass
 Tab: Brass


Circuits	Dimension			
	A	B	C	D
2	4.00	10.00	6.50	4.00
	8.00	14.00	10.50	8.00
	12.00	18.00	14.50	12.00
	16.00	22.00	18.50	16.00
3	4.00	14.00	10.50	8.00
	8.00	22.00	18.50	16.00
4	4.00	18.00	14.50	12.00
5	4.00	22.00	18.50	16.00

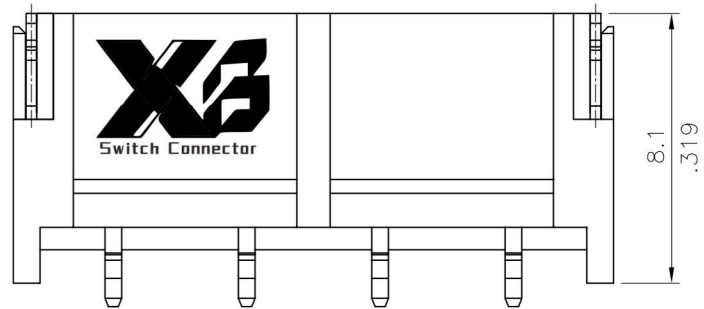

Ordering Code:

CP04 * * P 1 M L 0 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Circuits: 2, 3, 4 & 5 Pin
- ③ Circuits pitch:
 A= 4.0mm, B= 8.0mm,
 C= 12.0mm, D=16.0mm
- ④ P= Pin Header
- ⑤ Plating Code:
 1= Matte Tin Plated
- ⑥ Contact type: M= SMT Type
- ⑦ Option: L= Latch Type
- ⑧ Other option: 0= Standard(Reel Packing)
- ⑨ -NH= For Lead Free soldering process and Halogen-Free

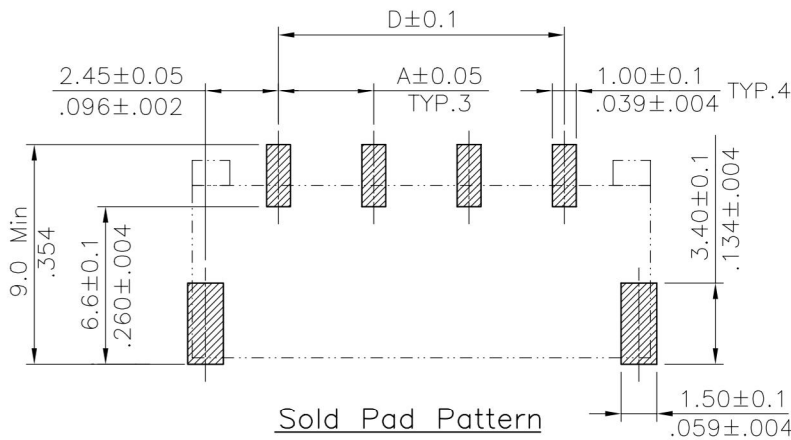

Halogen-Free

Lead Free Process

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	TITLE:	SCALE	SHEET	OF
4					DATE	UNIT: mm / inch			
3				DRAWN BY: Eager	01/30-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER: Eisley	02/01-08'	.X ± 0.30/.012 X' ± r			
1				CHECKED BY: Eisley	02/01-08'	.XX ± 0.20/.008 X' ±			
				APPROVED BY: Alex	02/01-08'	.XXX ± 0.10/.004 XX' ±			

TITLE: 4.0/8.0/12.0/16.0mm PITCH WIRE TO BOARD CONNECTOR

MATERIAL:

FINISH:

东莞市溪榜电子有限公司
 DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO. CP0462SA PART NO. CP04**P1MLO-NH

SCALE 3 / 1 SHEET 1 OF 1