

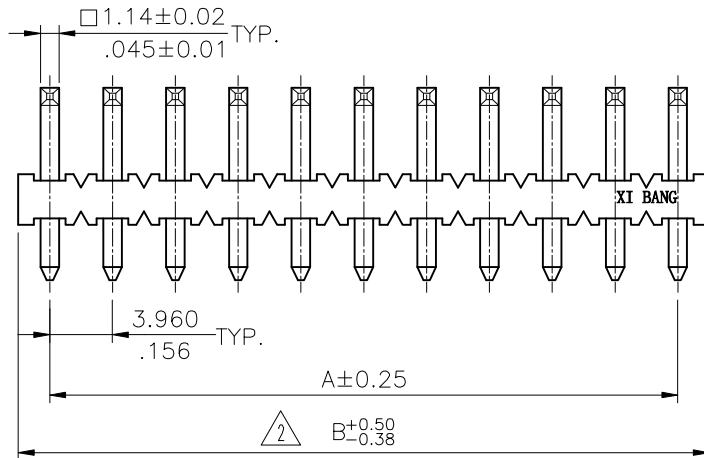
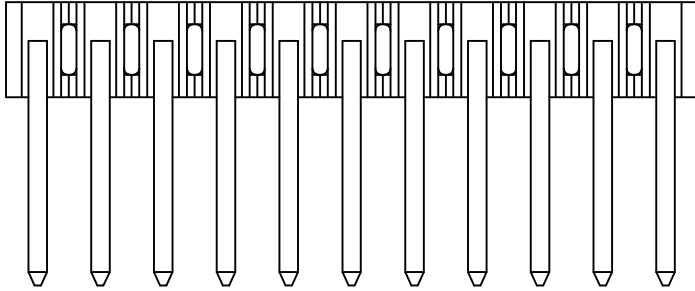




A = 3.96 * No. of Spaces

B = A + 3.96

* Available in 2 through 20 circuits

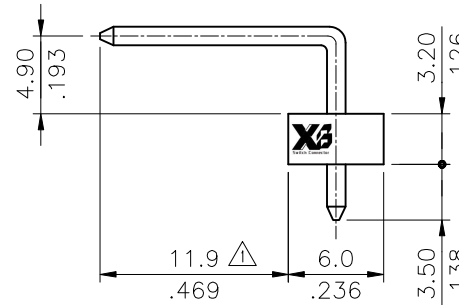

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:

CI77 ** P 1 H 00
① ② ③ ④ ⑤ ⑥

① Series No.

CI77= 3.96mm center spacing

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= 3.05μm(120μ") Min. Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over
1.27μm(50μ") Nickel

3= 0.38μm(15μ") Gold plated
over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated
over 1.27μm(50μ") Nickel

⑤ Tail Style: H= Right angle

⑥ Option: 00= Color White(Nature)
10= Color Black

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 3.96MM(.156") BOARD MOUNT PIN HEADER	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY: Karen	8/29-22'	TOLERANCE UNLESS OTHERWISE SPECIFIED	BOARD MOUNT PIN HEADER				
②	Karen	8/29-22'	ECNT122119/ECRQ122013	ENGINEER: Sun	8/30-22'	.X ± 0.38/.015 X' ± 1"	MATERIAL:	DRAWING NO. CI7702SE	PART NO. CI77**P1H*0		
①	Sun	6/05-08'	ECR08059-1/ECN08265	CHECKED BY: Eisley	8/31-22'	.XX ± 0.25/.010 X' ±	FINISH:	SCALE 2 / 1	SHEET 1 OF 1		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	8/31-22'	.XXX ± 0.10/.004 .XX' ±					