

Notes:

1. Material & Finish :

Insulation: Nylon 6, Color Nature
Contact: Brass

2. Circuit Pattern Schedule:

See Drawing No: CP0111S*



3. Glow wire requirement:

IEC 60695-2-12 GWFI 960°C@0.38mm
& 930°C@0.75mm
& 960°C@1.50mm
& 960°C@3.00mm

IEC 60695-2-11 GWEPT 750°C ≤2S

Ordering Code:

CP-01 4 ** * G 0
① ② ③ ④ ⑤ ⑥

① Series No.

② Type of Connector:

4= Right angle PCB mount header

③ No of Circuits:

④ Plating Code:

1= Tin over Nickel

2= Gold flash plated over Nickel



3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel

4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel

⑤ Variation:

G= UL 94V-2, With mounting pegs
(Glow wire available)

⑥ Option: 0= Standard

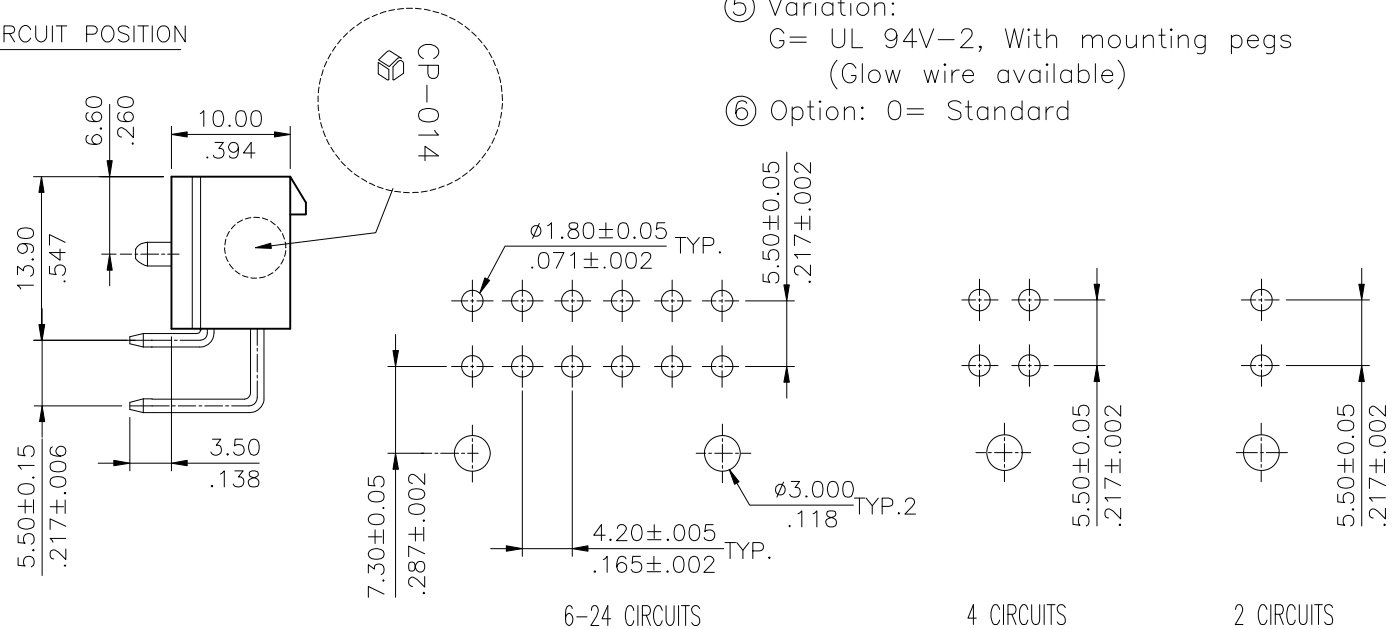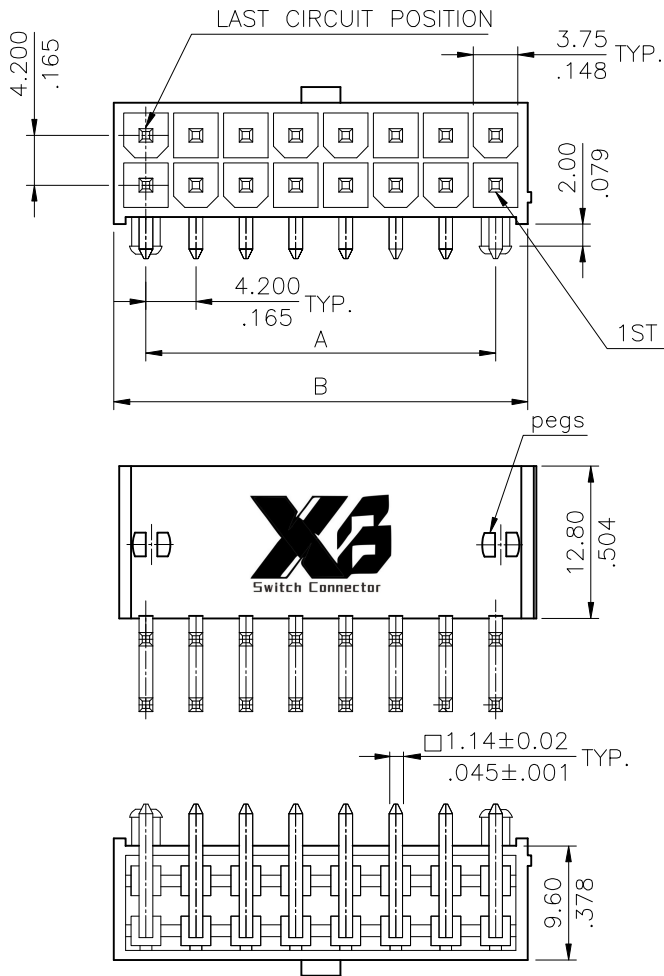

Recommended P.C. Board layout

Tin-Lead Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: RIGHT ANGLE HEADER
③				DRAWN BY: Kenny	8/26-20'	TOLERANCE UNLESS OTHERWISE SPECIFIED	CP-01 POWER CONNECTOR
②				ENGINEER: Sun	9/1-20'	.X ± 0.38/.015 X' ± r'	MATERIAL:
①	Kenny	8/26-20'	ECNT120227	CHECKED BY: Eisley	9/4-20'	.XX ± 0.25/.010 X' ±	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	9/4-20'	.XXX ± 0.10/.004 XX' ±	

东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DRAWING NO. CP0153AB	PART NO. CP-014***GO
SCALE 2 / 1	SHEET 1 OF 1