

Note:

* Base : LCP UL94V-0, Color Black

* SQ. Pin: Copper alloy

Ordering Code:

CP60 ** P * H 00 -NH
 ① ② ③ ④ ⑤ ⑥ ⑦


- ① Series No.
- ② No. of Circuits: 02 to 12
- ③ P= DIP Type
- ④ Plating:
 1= Tin Plated over Nickel
 B= Selective 15 μ" Gold Plated over Nickel
 C= Selective 30 μ" Gold Plated over Nickel
- ⑤ Type: H= Right Angel
- ⑥ Option: 00= Standard
- ⑦ Other option:
 -NH= For Lead Free Wave soldering Processes and Halogen-Free

Circuits	Dimension		
	A	B	C
2	-	8.35(.329)	-
4	5.70(.224)	12.05(.474)	-
6	11.40(.449)	17.75(.699)	11.40(.449)
8	17.10(.673)	23.45(.923)	17.10(.673)
10	22.80(.898)	29.15(1.148)	22.80(.898)
12	28.50(1.122)	34.85(1.372)	28.50(1.122)


Halogen-Free Lead Free Process RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: CP60 series 5.70mm DIP H type power connector	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Clark	11/19-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:	
2				ENGINEER: Clark	11/19-19'	.X ± 0.30/.012 X' ± r'	DRAWING NO. CP6002SA PART NO. CP60**P1H00-NH	
1	Clark	07/16-19	ECNT119180	CHECKED BY: Easley	12/13-19'	.XX ± 0.25/.010 .X' ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY: Easley	12/13-19'	.XXX ± .XX' ±	FINISH:	SCALE 2 / 1 SHEET 1 OF 2


02 PIN




04 PIN




06 PIN




08 PIN

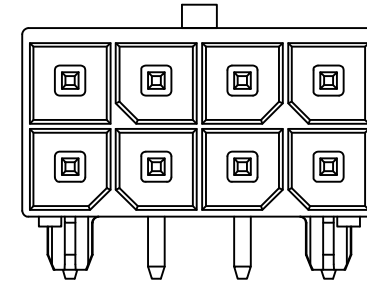


10 PIN

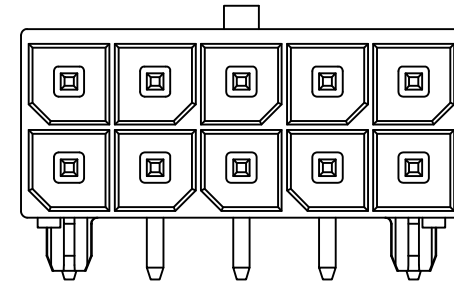


12 PIN

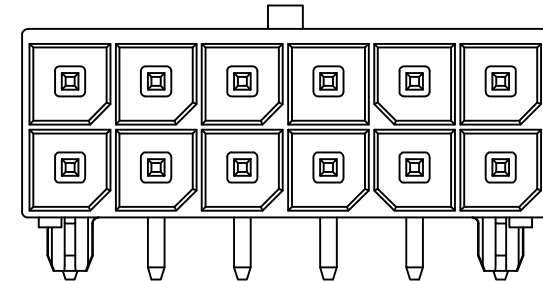


2 Circuits

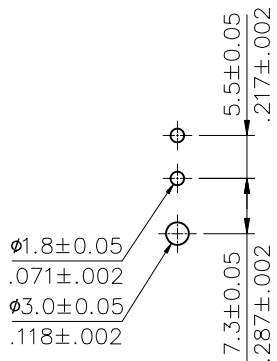

4 Circuits

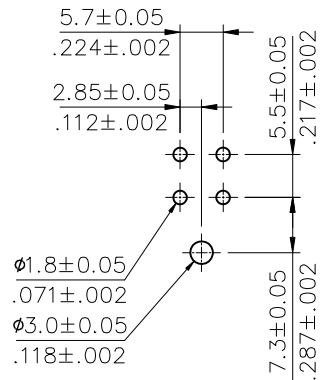

6~12 Circuits

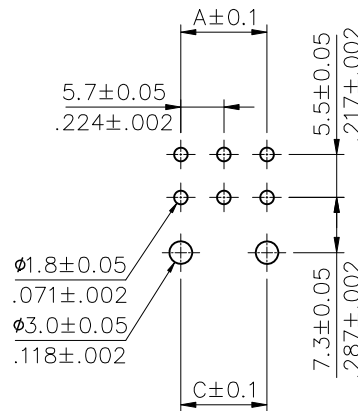


Recommended P.C. Board layout

Halogen-Free

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch		TITLE: CP60 series 5.70mm DIP H type power connector	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3				DRAWN BY: Clark	11/19-19'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
2				ENGINEER: Clark	11/19-19'	.X ± 0.30/.012	X' ± r'	FINISH:	DRAWING NO. CP6002SA	
1	Clark	07/16-19	ECNT119180	CHECKED BY: Eisley	12/13-19'	.XX ± 0.25/.010	.X' ±		SCALE	2 / 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	12/13-19'	.XXX ±	.XX' ±			