




Material:

Insulator: Nylon 66 UL 94V-0

Ordering Code:

$\frac{CP05}{①}$
 $\frac{02}{②}$
 $\frac{S}{③}$
 $\frac{L}{④}$
 $\frac{000}{⑤}$

- ① Series No.
- ② No. of Circuits: 2 PIN
- ③ S= Connector Housing
- ④ L=With Latch Type
- ⑤ Other option:
000= Color White(Standard)

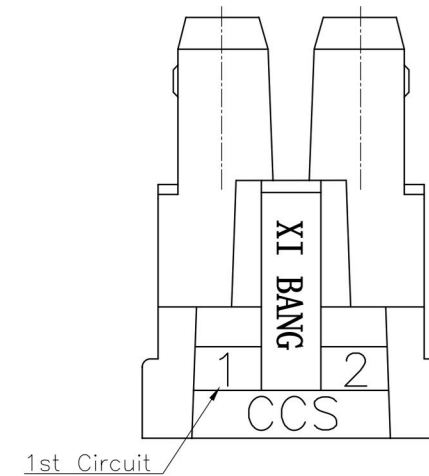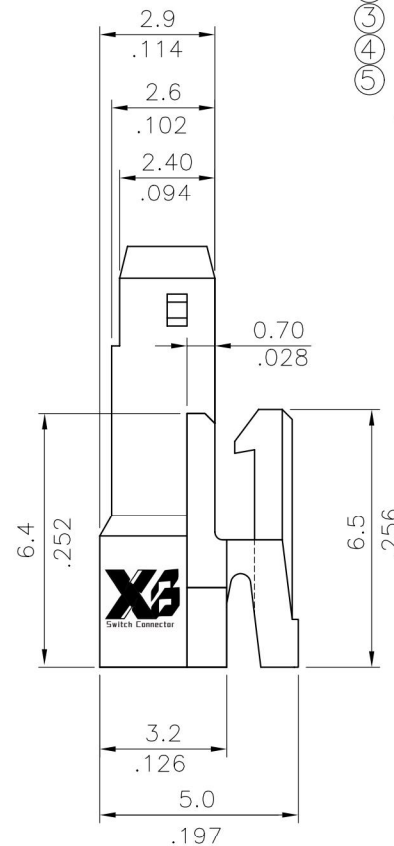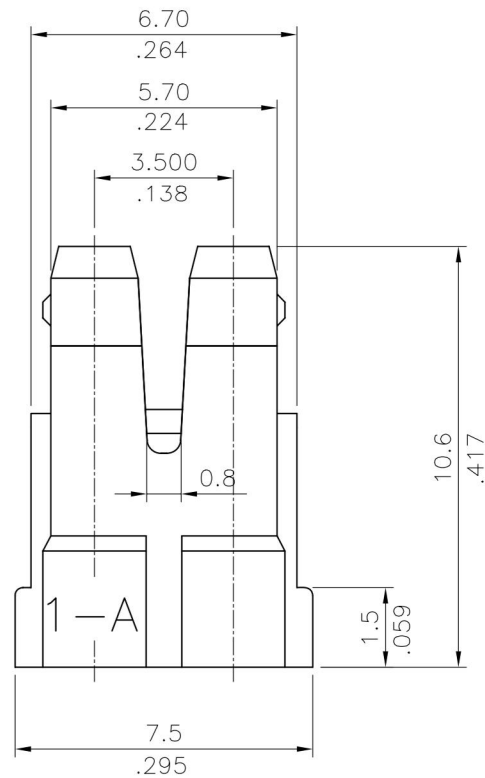

BOTTOM VIEW

Halogen-Free

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	DATE	UNIT: mm / inch	TITLE: 3.5mm PITCH HOUSING With Latch Type
④							
③				DRAWN BY: Hank	01/14-08'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
②				ENGINEER: Eisley	01/15-08'	.X ± 0.30/.012 X' ± r	MATERIAL:
①	Hank	1/11-08'	ECR08008-0/ECN08019	CHECKED BY: David	01/15-08'	.XX ± 0.20/.008 .X' ±	FINISH:
				APPROVED BY: Alex	01/15-08'	.XXX ± 0.10/.004 .XX' ±	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DRAWING NO.	CP0511SB	PART NO.	CP0502SL000
SCALE	5 / 1	SHEET	1 OF 1