


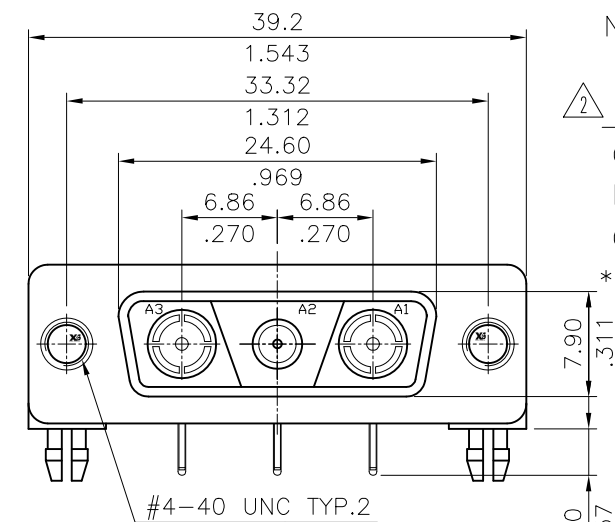

Notes:

Insulator: Glass filled Polyester UL 94V-0




② Shell: Steel, Nickel plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0 Color white

Contact: Brass with Gold plated

*For Lead Free Wave Flow Process

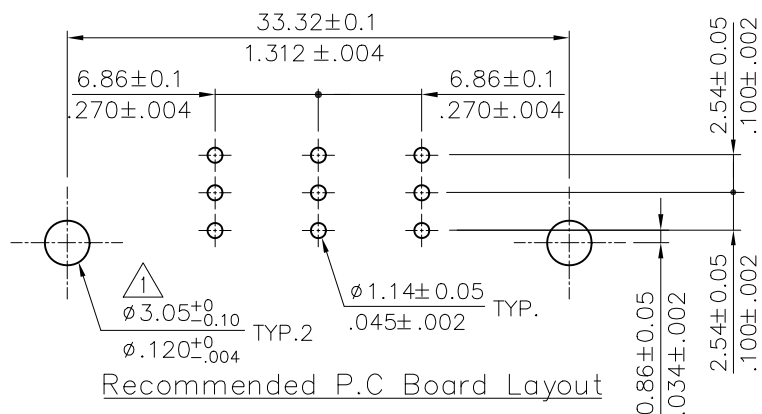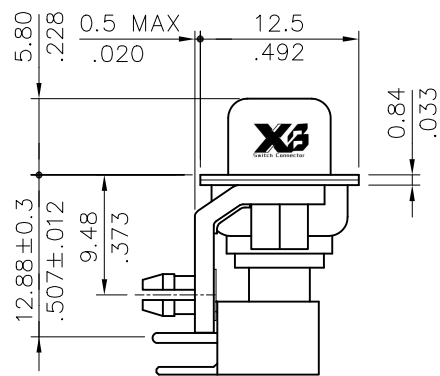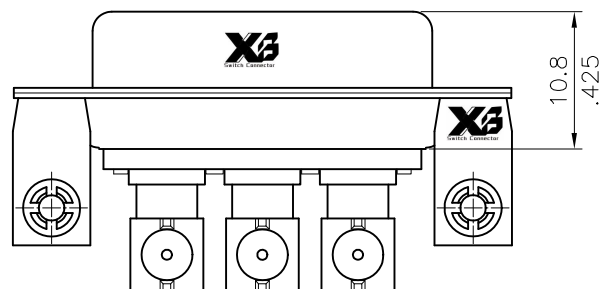

Ordering Code

3W3C S C H 3 0 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type:
S= Receptacle (2 Female + 1 Male Contacts)
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
0= Without signal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks (standard)

Lead Free Process

RoHS Compliant

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm 		DIM. L= 4.0mm 		øA=3.2mm 		

④					DATE	UNIT: mm / inch	TITLE: 3W3C MALE COAXIAL D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
③				DRAWN BY: Karen	1/17-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
②	Karen	1/17-18'	ECNT117262/ECRT117074	ENGINEER: Sun	1/23-18'	.X ± 0.30/.012 .X' ± .1'	MATERIAL:	DRAWING NO.	3W3C15SC	PART NO.	3W3CSCH*0*****0
①	Karen	4/07-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	1/25-18'	.XX ± 0.20/.008 .X' ± .1'	FINISH:	SCALE	2 / 1	SHEET	1 OF 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	1/25-18'	.XXX ± 0.10/.004 .X' ± .1'					