



High power Contact : Brass with Gold plated

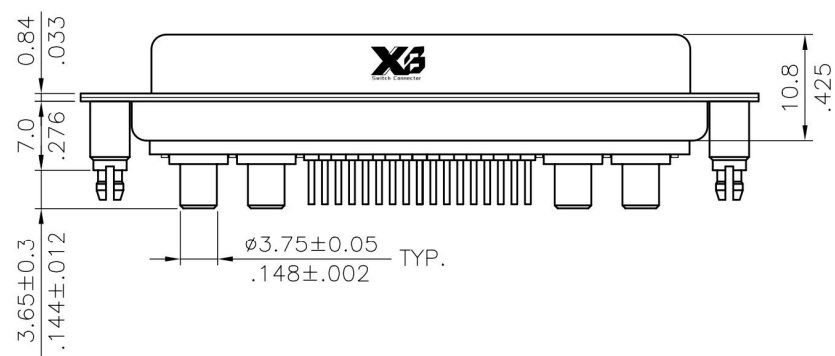


4						DATE	UNIT: mm / inch		TITLE: 21W4 40A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	21W410SB
2				ENGINEER:	David	10/19-01'	.X ± 0.30/0.012	.X' ± 1'	FINISH:	SCALE		2 / 1	SHEET
1				CHECKED BY:	David	10/19-01'	.XX ± 0.20/0.008	.X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/19-01'	.XXX ± 0.10/0.004	.XX' ±					

Ordering Code

21W4 S P V 3 2 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Connector Type: S= Receptacle
③ Contact type: P= High Power Contact
④ Contact tail style: V= Straight Dip type
⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15 μ " Gold plated over Nickel
4= 30 μ " Gold plated over Nickel
5= 50 μ " Gold plated over Nickel
⑥ Signal contact plating:
2= Gold flash plated over Nickel
3= 15 μ " Gold plated over Nickel
4= 30 μ " Gold plated over Nickel
⑦ Insulator color: 1= Black, 6= Green
⑧ Performance: 40= 40A
⑨ Mounting Style:
000= With $\phi 3.05$ mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

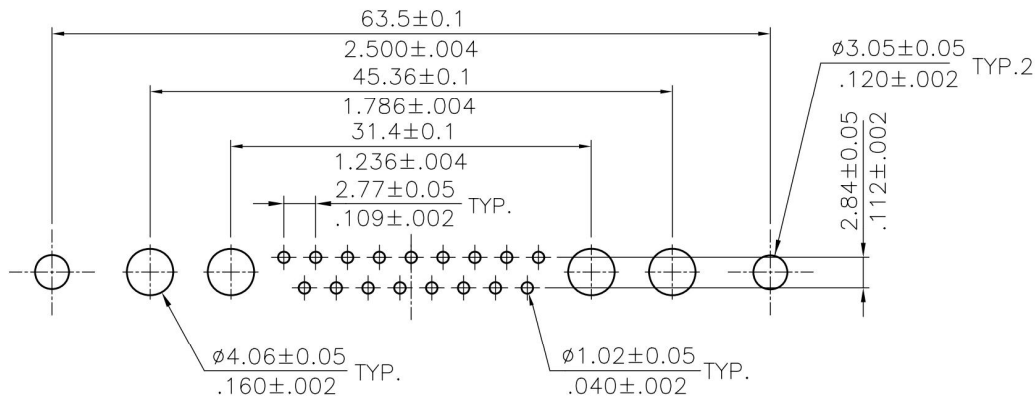

Recommended P.C Board Layout

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
			DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm

4						DATE	UNIT: mm / inch		TITLE: 21W4 40A HIGH POWER FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED						
2				ENGINEER:	David	10/19-01'	.X ± 0.30/012	X' ± 1'					
1				CHECKED BY:	David	10/19-01'	.XX ± 0.20/008	X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/19-01'	.XXX ± 0.10/004	.XX' ±	MATERIAL:		DRAWING NO.	21W410SB	PART NO.
									FINISH:	SCALE	2 / 1	SHEET	2 OF 2