

Notes:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard



Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

* For Lead Free Wave Flow Process

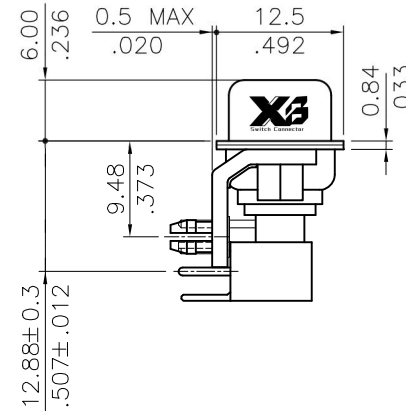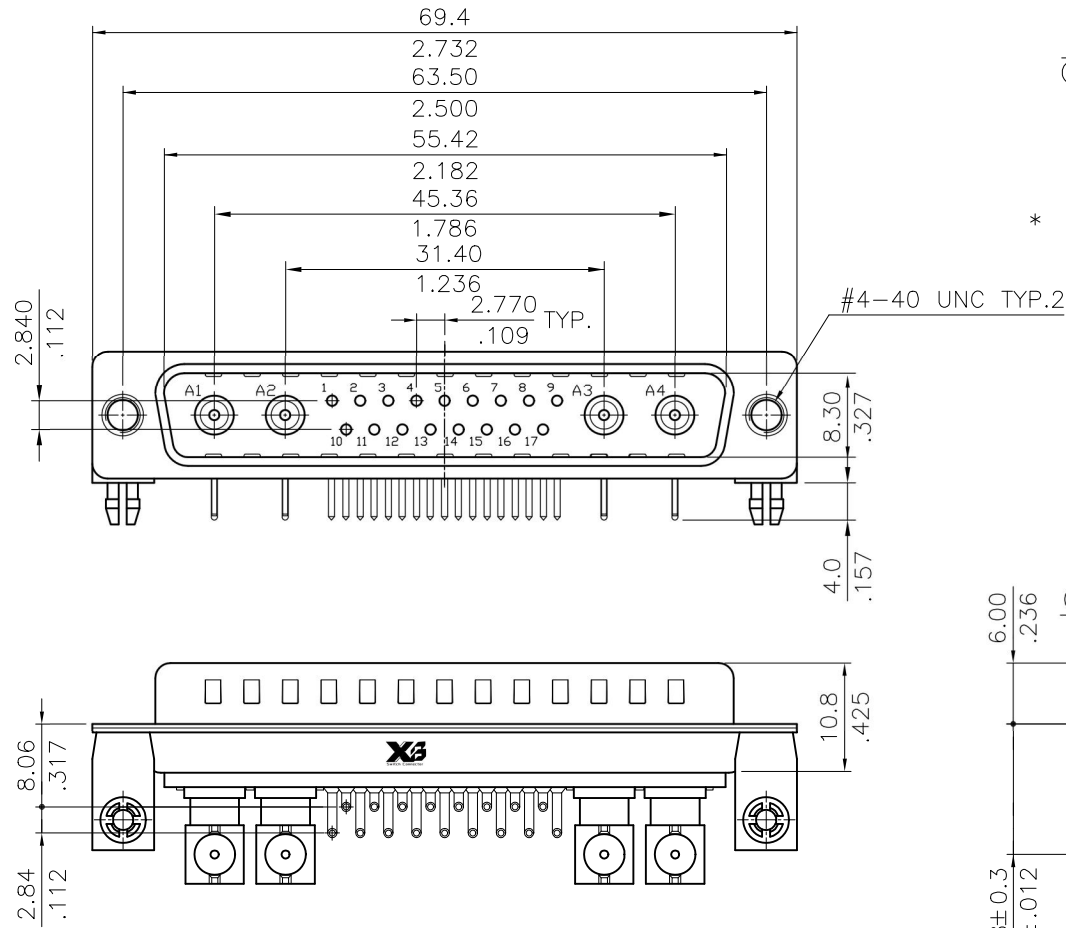

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 21W4 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	MATERIAL:	FINISH:	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Karen	4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
2				ENGINEER: Sun	4/21-17'	.X ± 0.30/.012	X' ± 1'			DRAWING NO. 21W405SC	PART NO. 21W4PCH*****	SCALE 2 / 1	SHEET 1 OF 2
1	Karen	4/18-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	4/21-17'	.XX ± 0.20/.008	X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/21-17'	.XXX ± 0.10/.004	.XX ±						


21W4	P	C	H	3	2	1	75	I10
①	②	③	④	⑤	⑥	⑦	⑧	⑨

- | | | | | | |
|----|------------|-------|--------|------|--------|
| 2= | Gold | flash | plated | over | Nickel |
| 3= | 15 μ " | Gold | plated | over | Nickel |
| 4= | 30 μ " | Gold | plated | over | Nickel |
| 5= | 50 μ " | Gold | plated | over | Nickel |

- ⑨ Mounting Style:

```
with board locks(standard)
```

RoHS Compliant

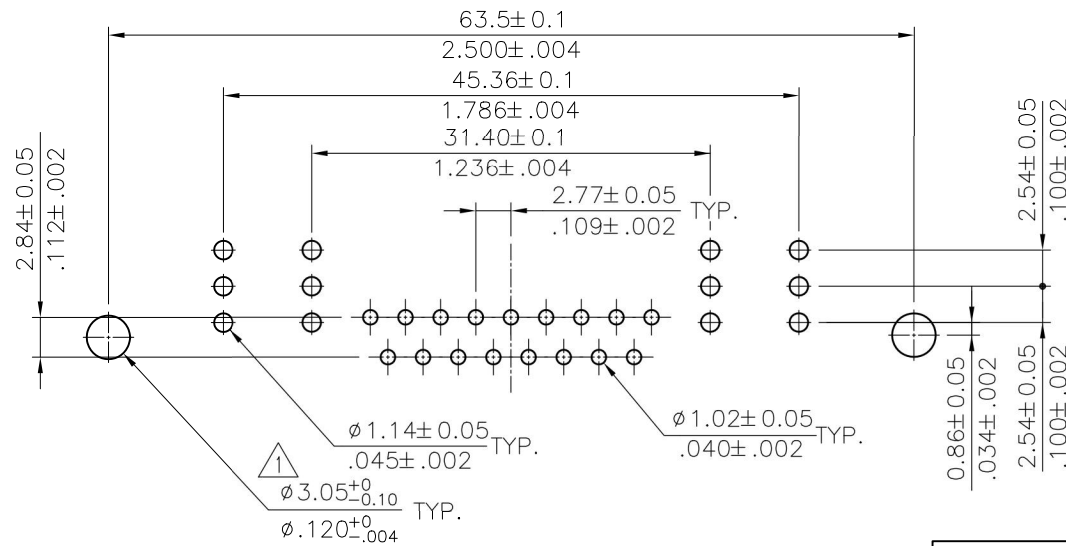

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		$\phi A=3.2mm$ 			

4						DATE	UNIT: mm / inch		TITLE: 21W4 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Karen	4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:		
2				ENGINEER:	Sun	4/21-17'							
1	Karen	4/18-17'	ECNT117049/ECRT117003	CHECKED BY:	Eisley	4/21-17'	.X ± 0.30/.012 .XX ± 0.20/.008 .XXX ± 0.10/.004 X' ± 1" X'' ± XX' ±	FINISH:			DRAWING NO.	21W405SC	PART NO.
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	4/21-17'				SCALE	2 / 1	SHEET	2 OF 2