




Insulator: Glass filled Polyester UL 94V-0
Contact: Copper alloy
Shell: Steel, Tin plated as standard
Coaxial terminal
Insulator: Teflon UL 94V-0
Color white
Contact: Brass

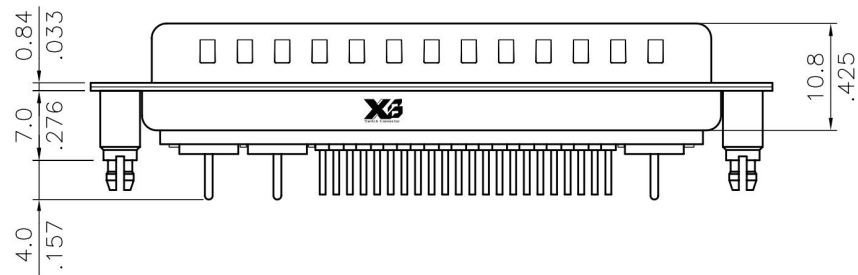

4						DATE	UNIT: mm / inch	TITLE: 25W3 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:		
2				ENGINEER:	David	10/18-01'	.X ± 0.30/.012 X' ± 1"	FINISH:	DRAWING NO.		25W303SB	PART NO.
1				CHECKED BY:	David	10/18-01'	.XX ± 0.20/.008 X' ±		SCALE	2 / 1	SHEET	1 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/18-01'	.XXX ± 0.10/.004 XX ±					

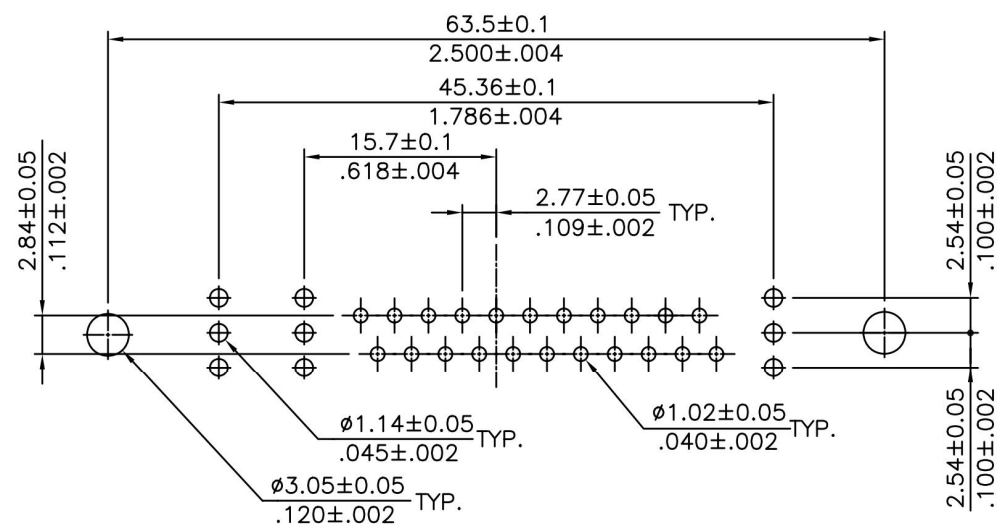

Recommended P.C Board Layout

Ordering Code

25W3 P C V 3 2 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15μ" Gold plated over Nickel
 - 4= 30μ" Gold plated over Nickel
 - 5= 50μ" Gold plated over Nickel
- ⑥ Signal contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15μ" Gold plated over Nickel
 - 4= 30μ" Gold plated over Nickel
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
 - 000= With ø3.05mm holes on shell
 - B00= Riveted #4-40 UNC open nuts on front shell
 - C00= Riveted #4-40 UNC open nuts on rear shell
 - D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		DIM. L= 7.0mm 	

4					DATE	UNIT: mm / inch	TITLE: 25W3 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Rita	10/18-01'						
2				ENGINEER:	David	10/18-01'						
1				CHECKED BY:	David	10/18-01'						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/18-01'	MATERIAL:		DRAWING NO. 25W303SB PART NO. 25W3PCV*****00			
							FINISH:		SCALE 2 / 1 SHEET 2 OF 2			