

Notes:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard


Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

* For Lead Free Wave Flow Process

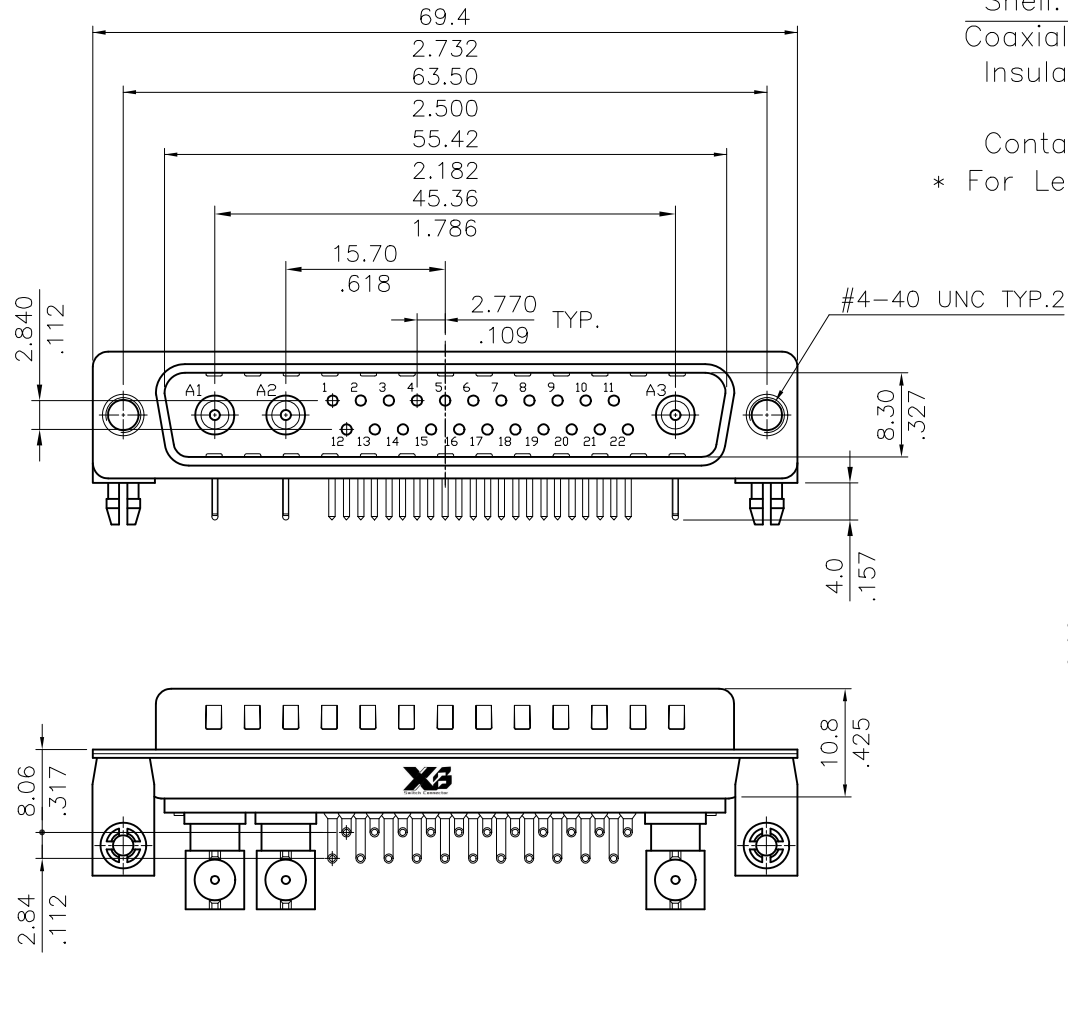

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 25W3 COAXIAL MALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Karen	4/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:				
2				ENGINEER: Sun	4/21-17'	.X ± 0.30/.012 X' ± 1'	FINISH:	DRAWING NO.	25W305SC	PART NO.	25W3PCH*****
1	Karen	4/18-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	4/21-17'	.XX ± 0.20/.008 X' ±		SCALE	2 / 1	SHEET	1 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	4/21-17'	.XXX ± 0.10/.004 XX' ±					

