


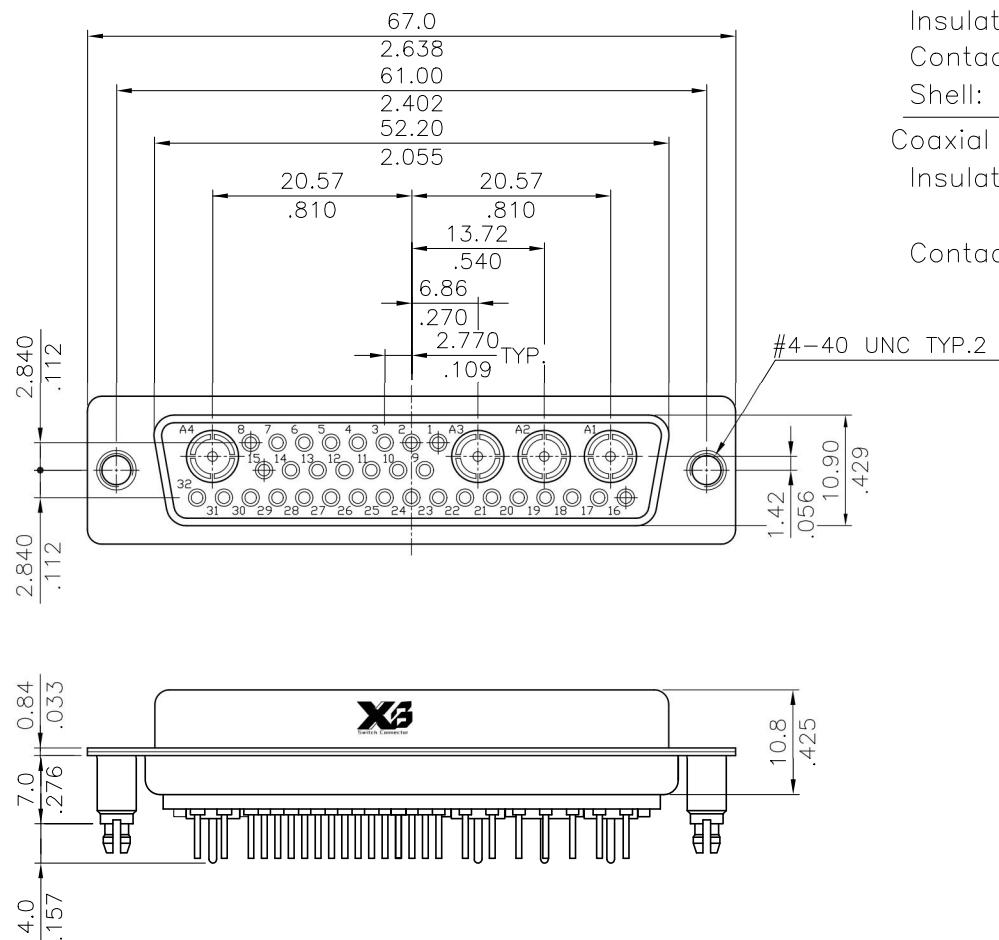

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy

Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

Lead Free Process

RoHS Compliant

4					DATE	UNIT: mm / inch	TITLE: 36W4 COAXIAL FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY: Karen	2/26-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER: Eisley	3/2-10'	.X ±0.30/.012 X' ± 1"	MATERIAL:	DRAWING NO. 36W404SC	PART NO. 36W4SCV*****00	SCALE 2 / 1	SHEET 1 OF 2
1	Karen	2/26-10'	ECN10040	CHECKED BY: David	3/2-10'	.XX ±0.20/.008 X' ±					
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	3/2-10'	.XXX ±0.10/.004 X' ±	FINISH:				



36W4	S	C	V	3	2	1	75	D00
①	②	③	④	⑤	⑥	⑦	⑧	⑨

- | Mounting Style | | Lead Free Process | | RoHS Compliant | |
|---|-----|---|-----|---|-----|
| Code | 000 | Code | B00 | Code | C00 |
|  | | DIM. L = 4.0mm
 | | DIM. L = 4.0mm
 | |
| | | DIM. L = 7.0mm
 | | | |

4					DATE	UNIT: mm / inch		TITLE: 36W4 COAXIAL FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Karen	2/26-10'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	Eisley	3/2-10'	.X ±0.30/.012	X* ± 1'	MATERIAL:			
1	Karen	2/26-10'	ECN10040	CHECKED BY:	David	3/2-10'	.XX ±0.20/.008	X* ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	David	3/2-10'	.XXX ±0.10/.004	.XX ±	FINISH:			
									DRAWING NO.	36W404SC	PART NO.	36W4SCV*****00
									SCALE	2 / 1	SHEET	2 OF 2