
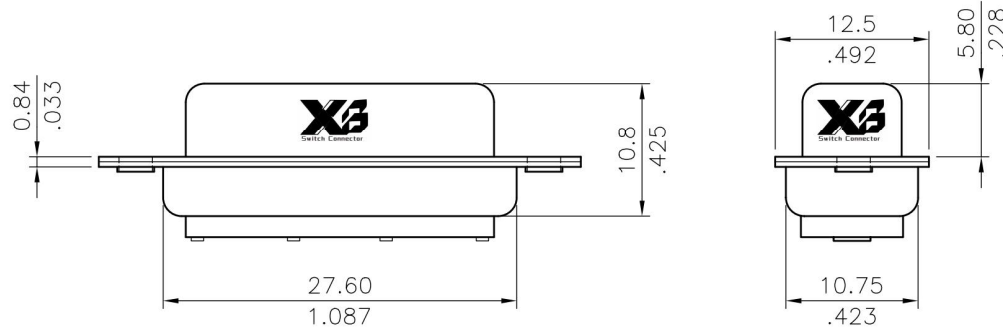


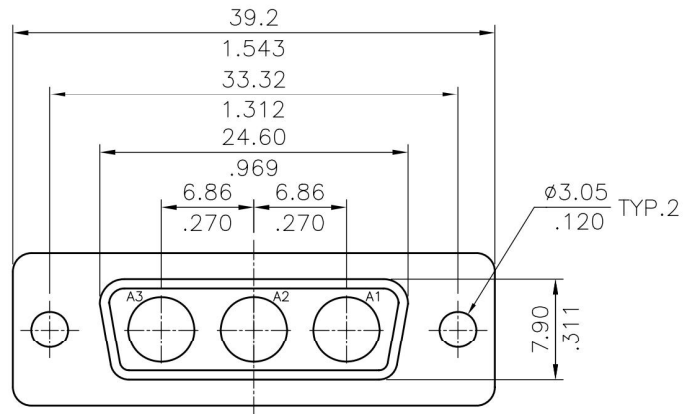

Material:

Insulator: Glass filled Polyester UL 94V-0

Shell: Steel, Tin plated as standard

Ordering Code

C3W3 S0000 100 000
① ② ③ ④

① Series No.

② Connector Type:
S0000= Receptacle

③ Insulator Color:

100= Black

600= Green

④ Mounting Style:

000= With $\phi 3.05$ mm holes on shell

A00= Riveted #4-40 UNC close nuts on front shell

B00= Riveted #4-40 UNC open nuts on front shell

C00= Riveted #4-40 UNC open nuts on rear shell

Mounting Style

RoHS Compliant

Code	000	Code	A00	Code	B00	Code	C00
			DIM. L= 5.8mm		DIM. L= 4.0mm		DIM. L= 4.0mm

4					DATE	UNIT: mm / inch		TITLE: C3W3 FEMALE COMBO D-SUB CONNECTOR (SOLDER CUP TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
3				DRAWN BY:	Eisley	10/09-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED			MATERIAL:		
2				ENGINEER:	David	10/15-01'		.X ± 0.30/012			X' ± 1'	
1				CHECKED BY:	David	10/15-01'	.XX ± 0.20/008	X' ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/15-01'	.XXX ± 0.10/004	.XX' ±		FINISH:		
									DRAWING NO.	C3W302SB	PART NO.	C3W3S0000*00*00
									SCALE	2 / 1	SHEET	1 OF 1