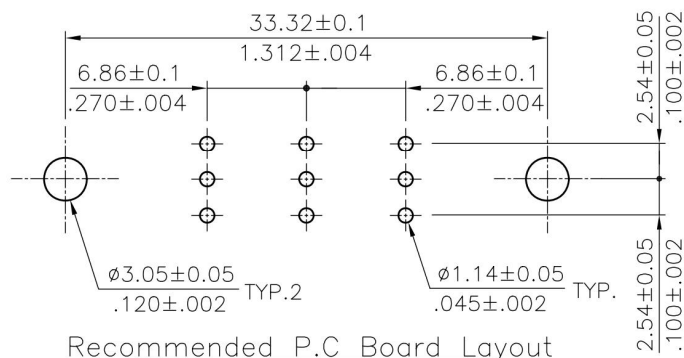
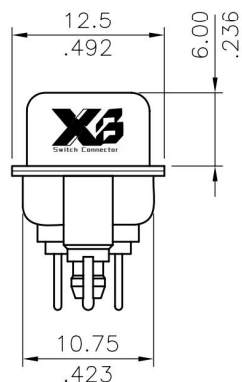








Contact: Brass with Gold plated



C3W3	P	C	V	3	0	1	75	D00
①	②	③	④	⑤	⑥	⑦	⑧	⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
 - 2= Gold flash plated over Nickel
 - 3= 15μ" Gold plated over Nickel
 - 4= 30μ" Gold plated over Nickel
 - 5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
 - 0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
 - 000= With $\phi 3.05\text{mm}$ holes on shell
 - B00= Riveted #4-40 UNC open nuts on front shell
 - C00= Riveted #4-40 UNC open nuts on rear shell
 - D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style				RoHS Compliant			
Code	000	Code	B00	Code	C00	Code	D00
		DIM. L = 4.0mm 		DIM. L = 4.0mm 		DIM. L = 7.0mm 	

4						DATE	UNIT: mm / inch		TITLE: C3W3 COAXIAL MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
3				DRAWN BY:	Eisley	10/09-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2				ENGINEER:	David	10/15-01'	.X ± 0.30/.012	X* ± 1'	MATERIAL:			
1				CHECKED BY:	David	10/15-01'	.XX ± 0.20/.008	X* ±				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/15-01'	.XXX ± 0.10/.004	.XX ±	FINISH:	DRAWING NO. C3W303SB	PART NO. C3W3PCV*0****0	
										SCALE	2 / 1	SHEET 1 OF 1