




Material:

Insulator: Glass filled Polyester UL 94V-0
Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0
Color white

Contact: Brass with Gold plated

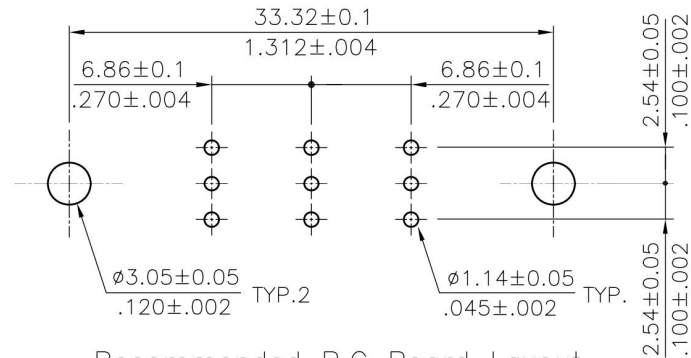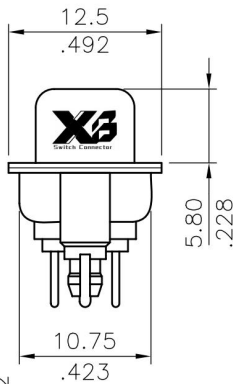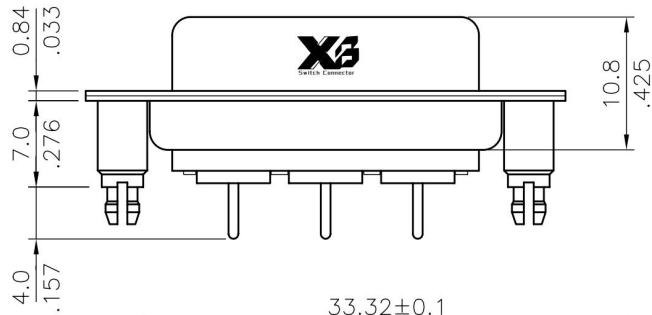

Recommended P.C Board Layout

Ordering Code

C3W3 S C V 3 0 1 75 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15 μ " Gold plated over Nickel
4= 30 μ " Gold plated over Nickel
5= 50 μ " Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50 Ω , 75= 75 Ω
- ⑨ Mounting Style:
000= With ϕ 3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

| Code | 000 | Code | B00 | Code | C00 | Code | D00 |
|------|---------------|------|---------------|------|---------------|------|---------------|
| | DIM. L= 4.0mm | | DIM. L= 4.0mm | | DIM. L= 4.0mm | | DIM. L= 7.0mm |
| | | | | | | | |

| | | | | | | | | |
|-----|------|------|-----------|-------------------|-----------|--------------------------------------|---|--|
| ④ | | | | | DATE | UNIT: mm / inch | TITLE: C3W3 COAXIAL FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE) | 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD. |
| ③ | | | | DRAWN BY: Eisley | 10/09-01' | TOLERANCE UNLESS OTHERWISE SPECIFIED | MATERIAL: | |
| ② | | | | ENGINEER: David | 10/15-01' | .X \pm 0.30/.012 X' \pm 1' | FINISH: | |
| ① | | | | CHECKED BY: David | 10/15-01' | .XX \pm 0.20/.008 X' \pm | DRAWING NO. C3W304SB PART NO. C3W3SCV*0****00 | |
| SYM | NAME | DATE | REVISIONS | APPROVED BY: Alex | 10/15-01' | .XXX \pm 0.10/.004 XX' \pm | SCALE 2 / 1 SHEET 1 OF 1 | |