
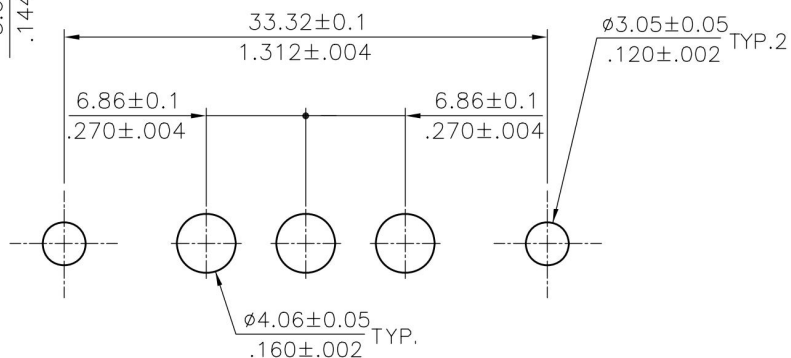
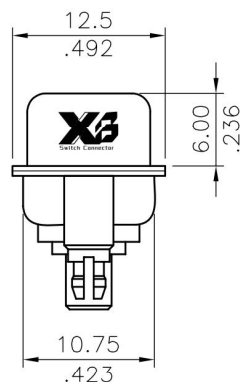
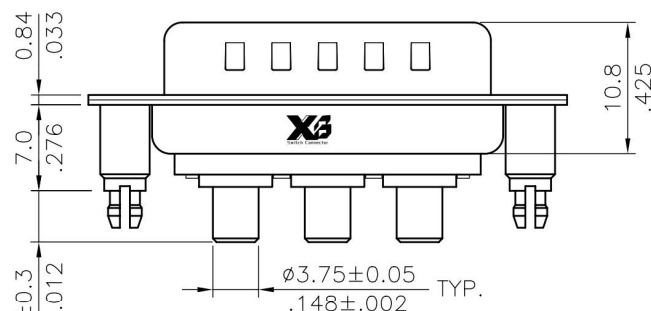


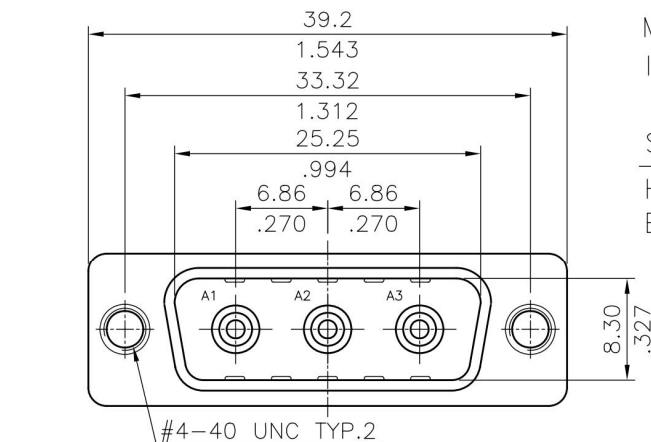

Recommended P.C Board Layout

Material:

Insulator: Glass filled Polyester UL 94V-0

Color Black or Green

Shell: Steel, Tin plated as standard

High power Contact :

Brass with Gold plated

Ordering Code

C3W3 P P V 3 0 1 40 D00
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: V= Straight Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 40= 40A
- ⑨ Mounting Style:
000= With Ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
D00= Riveted #4-40 UNC ground stand-off on rear shell(standard)

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 4.0mm		DIM. L= 7.0mm	

4						DATE	UNIT: mm / inch		TITLE: C3W3 40A HIGH POWER MALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3				DRAWN BY:	Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:				
2				ENGINEER:	David	10/18-01'	.X ± 0.30/.012	X' ± 1'							
1				CHECKED BY:	David	10/18-01'	.XX ± 0.20/.008	X' ±							
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	10/18-01'	.XXX ± 0.10/.004	.XX' ±	FINISH:		DRAWING NO.	C3W309SB	PART NO.	C3W3PPV*0*40**	
										SCALE	2 / 1		SHEET	1 OF 1	