
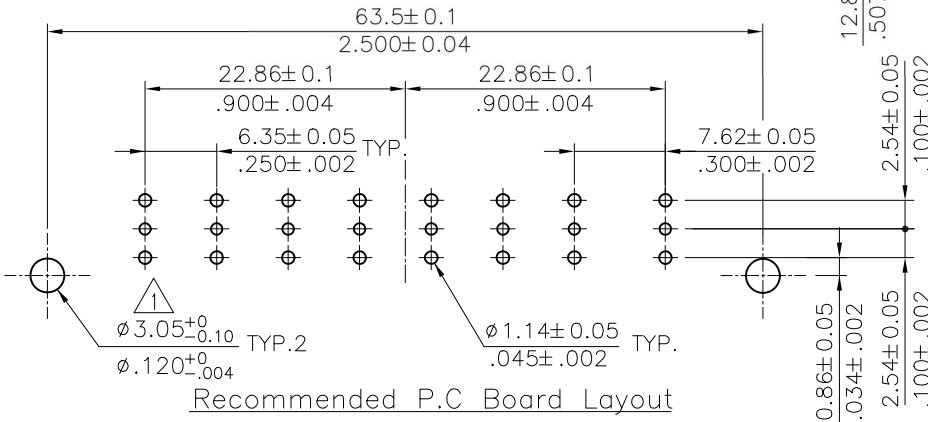
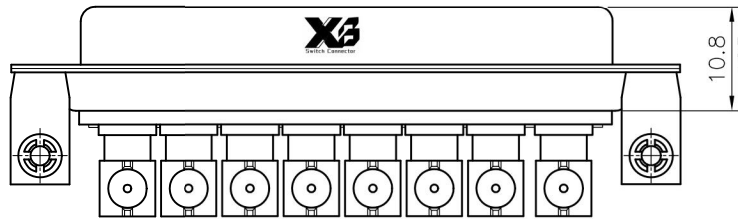


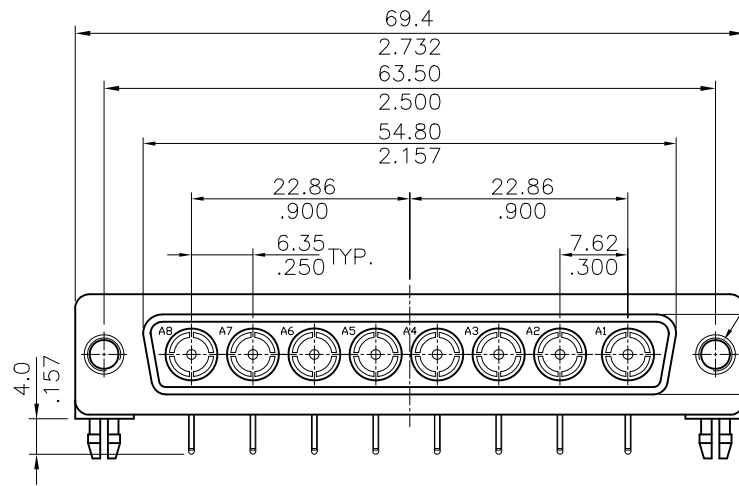


Material:

Insulator: Glass filled Polyester UL 94V-0
Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0, Color white
Contact: Brass

#4-40 UNC TYP.2

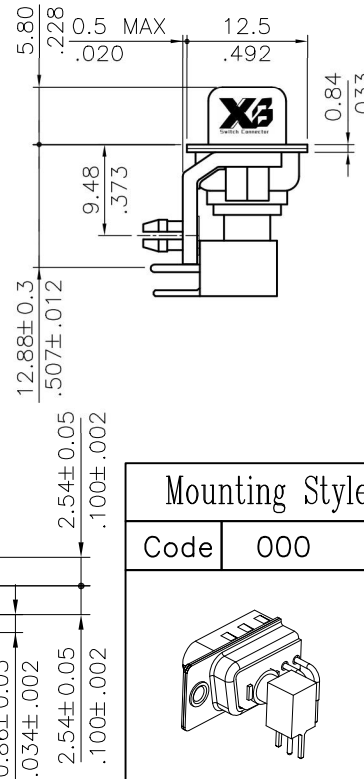

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
	DIM. L = 4.0mm		DIM. L = 4.0mm		DIM. L = 4.0mm		øA = 3.2mm		

Ordering Code

C8W8 S C H 3 0 1 75 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: S= Receptacle
- ③ Contact type: C= Coaxial Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ Coaxial contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 50= 50Ω, 75= 75Ω
- ⑨ Mounting Style:
000= With ø3.05mm holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with ø3.2mm holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

4					DATE	UNIT: mm / inch	TITLE: C8W8 COAXIAL FEMALE D-SUB CONNECTOR (RIGHT ANGLE PCB MOUNT TYPE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Karen	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED		
2				ENGINEER: Sun	3/20-17'	.X ± 0.30/.012 X' ± 1'	MATERIAL:	
1	Karen	3/20-17'	ECNT117049/ECRT117003	CHECKED BY: Eisley	3/22-17'	.XX ± 0.20/.008 X' ±	FINISH:	
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	3/22-17'	.XXX ± 0.10/.004 XX' ±		DRAWING NO. C8W806SC PART NO. C8W8SCH*0***** SCALE 2 / 1 SHEET 1 OF 1