



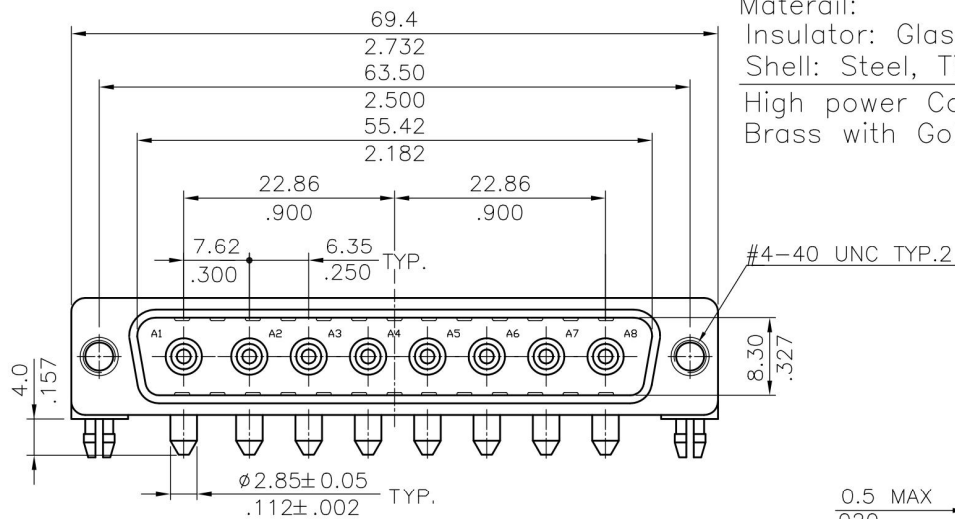

Ordering Code

C8W8 P P H 3 0 1 20 I10
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Connector Type: P= Plug
- ③ Contact type: P= High Power Contact
- ④ Contact tail style: H= Right Angle Dip type
- ⑤ High power contact plating:
2= Gold flash plated over Nickel
3= 15μ" Gold plated over Nickel
4= 30μ" Gold plated over Nickel
5= 50μ" Gold plated over Nickel
- ⑥ Singal contact plating:
0= Without singal contact
- ⑦ Insulator color: 1= Black, 6= Green
- ⑧ Performance: 20= 20A
- ⑨ Mounting Style:
000= With $\phi 3.05\text{mm}$ holes on shell
B00= Riveted #4-40 UNC open nuts on front shell
C00= Riveted #4-40 UNC open nuts on rear shell
I00= Riveted #4-40 UNC ground tabs with $\phi 3.2\text{mm}$ holes
I10= Riveted #4-40 UNC ground tabs with board locks(standard)

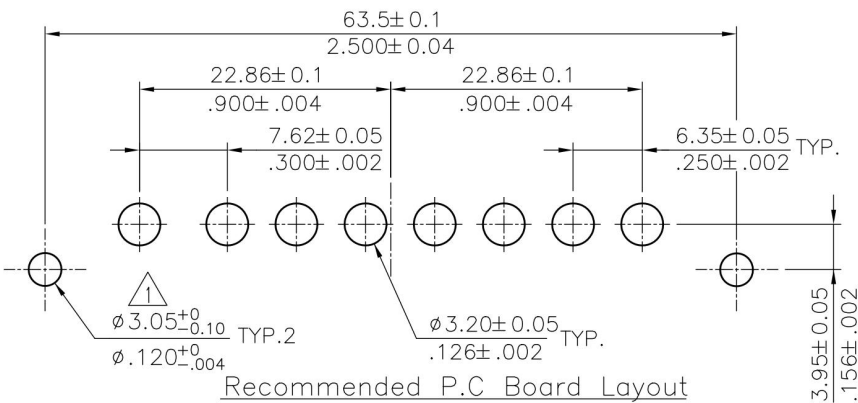

Mounting Style

Code	000	Code	B00	Code	C00	Code	I00	Code	I10
			DIM. L= 4.0mm 		DIM. L= 4.0mm 		$\phi A=3.2\text{mm}$ 		

4						DATE	UNIT: mm / inch		TITLE: C8W8 20A HIGH POWER MALE D-SUB CONNECTOR (RIGHT ANGLE BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
3				DRAWN BY:	Karen	3/20-17'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:
2				ENGINEER:	Sun	3/20-17'	.X ± 0.30/.012	X' ± 1"			
1	Karen	3/20-17'	ECNT117049/ECRT117003	CHECKED BY:	Eisley	3/22-17'	.XX ± 0.20/.008	.X' ±			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	3/22-17'	.XXX ± 0.10/.004	.XX ±	FINISH:	DRAWING NO. C8W811SC	PART NO. C8W8PPH*0*20***
										SCALE 2 / 1	SHEET 1 OF 1