



P/N: CHPTPS*400*

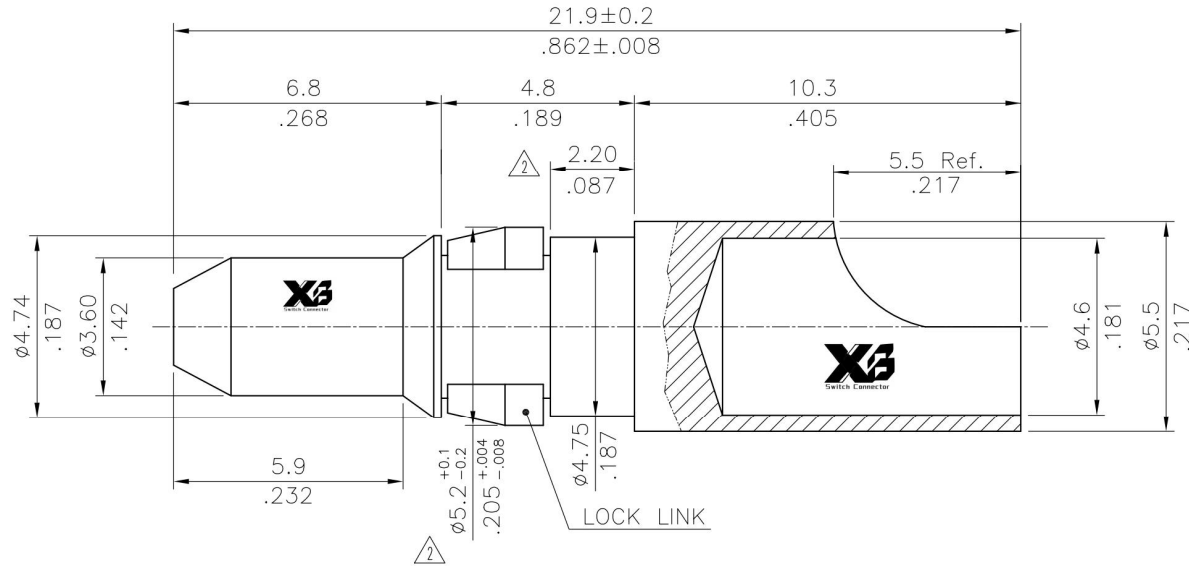

P/N: CHPTPS*200*

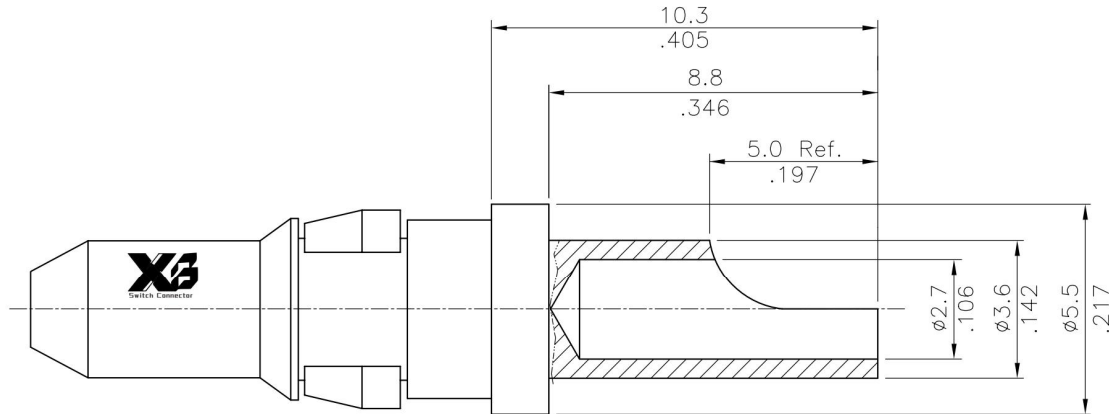

MATERIAL:

- * CONTACT : BRASS WITH GOLD PLATED
* LOCK LINK : BRASS WITH NICKEL PLATED

Part No.	CURRENT RATING (Amps)	WIRE SIZE
CHPTPS*4000	40	AWG #8~10
CHPTPS*2000	20	AWG #12~14

Ordering Code :

CHPT	P	S	*	**	0*
①	②	③	④	⑤	⑥

- ① Series No.
- ② Connector type : P= Male
- ③ Contact type : S= Solder type
- ④ Contact Plating :
 - 2= 1.2 μ " Gold plated over 50 μ " Nickel
 - 3= 15 μ " Gold plated over 50 μ " Nickel
 - 4= 30 μ " Gold plated over 50 μ " Nickel
 - 5= 50 μ " Gold plated over 50 μ " Nickel
- ⑤ Performance :
 - 20= 20 A
 - 40= 40 A
- ⑥ Other option :
 - 00= With Lock Link (Standard)
 - 0M= Without Lock Link

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: SOLDER TYPE HIGH POWER PLUG TERMINAL	X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
3				DRAWN BY:	Sandy	5/20-09'	TOLERANCE UNLESS OTHERWISE SPECIFIED								
2	Sandy	5/20-09	ECN09254	ENGINEER:	Eisley	5/22-09'	.X	$\pm 0.10/.004$	X' $\pm 1'$		MATERIAL:				
1	Sandy	7/2-07'	ECN07256/ECR07037-1	CHECKED BY:	David	5/22-09'	.XX	$\pm 0.05/.002$	X" $\pm$			FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Alex	5/22-09'	.XXX $\pm$	.XX $\pm$		DRAWING NO.	CHPT01SE		PART NO.	CHPTPS**00*	
										SCALE	5 / 1	SHEET	1	OF	1