








XB-FPC -0521 A R 22 -XX X XX 01

XB connector
Series No
Termipoint
A-Air Docking
Angle
R-90°
Terminal Plating
BT-Bright Tin
Housing Colour
S-Nature
Pin Q' PY
06~60
Height
22-2.2mm

XB-FPC specifications:

- 1.Current rated: 0.5A AC/DC
- 2.Voltage rating: 50V AC/DC
- 3.Withstanding voltage: 200V AC for 1 min
- 4.Contact resistance: 40mΩ max.
- 5.Insulation resistance: 40MΩ min
- 6.Durability cycle: 30Cycles
- 7.Removal force: 0.04kgf/Pin min
- 8.Operating temperature range: -55°C ~ +85°C

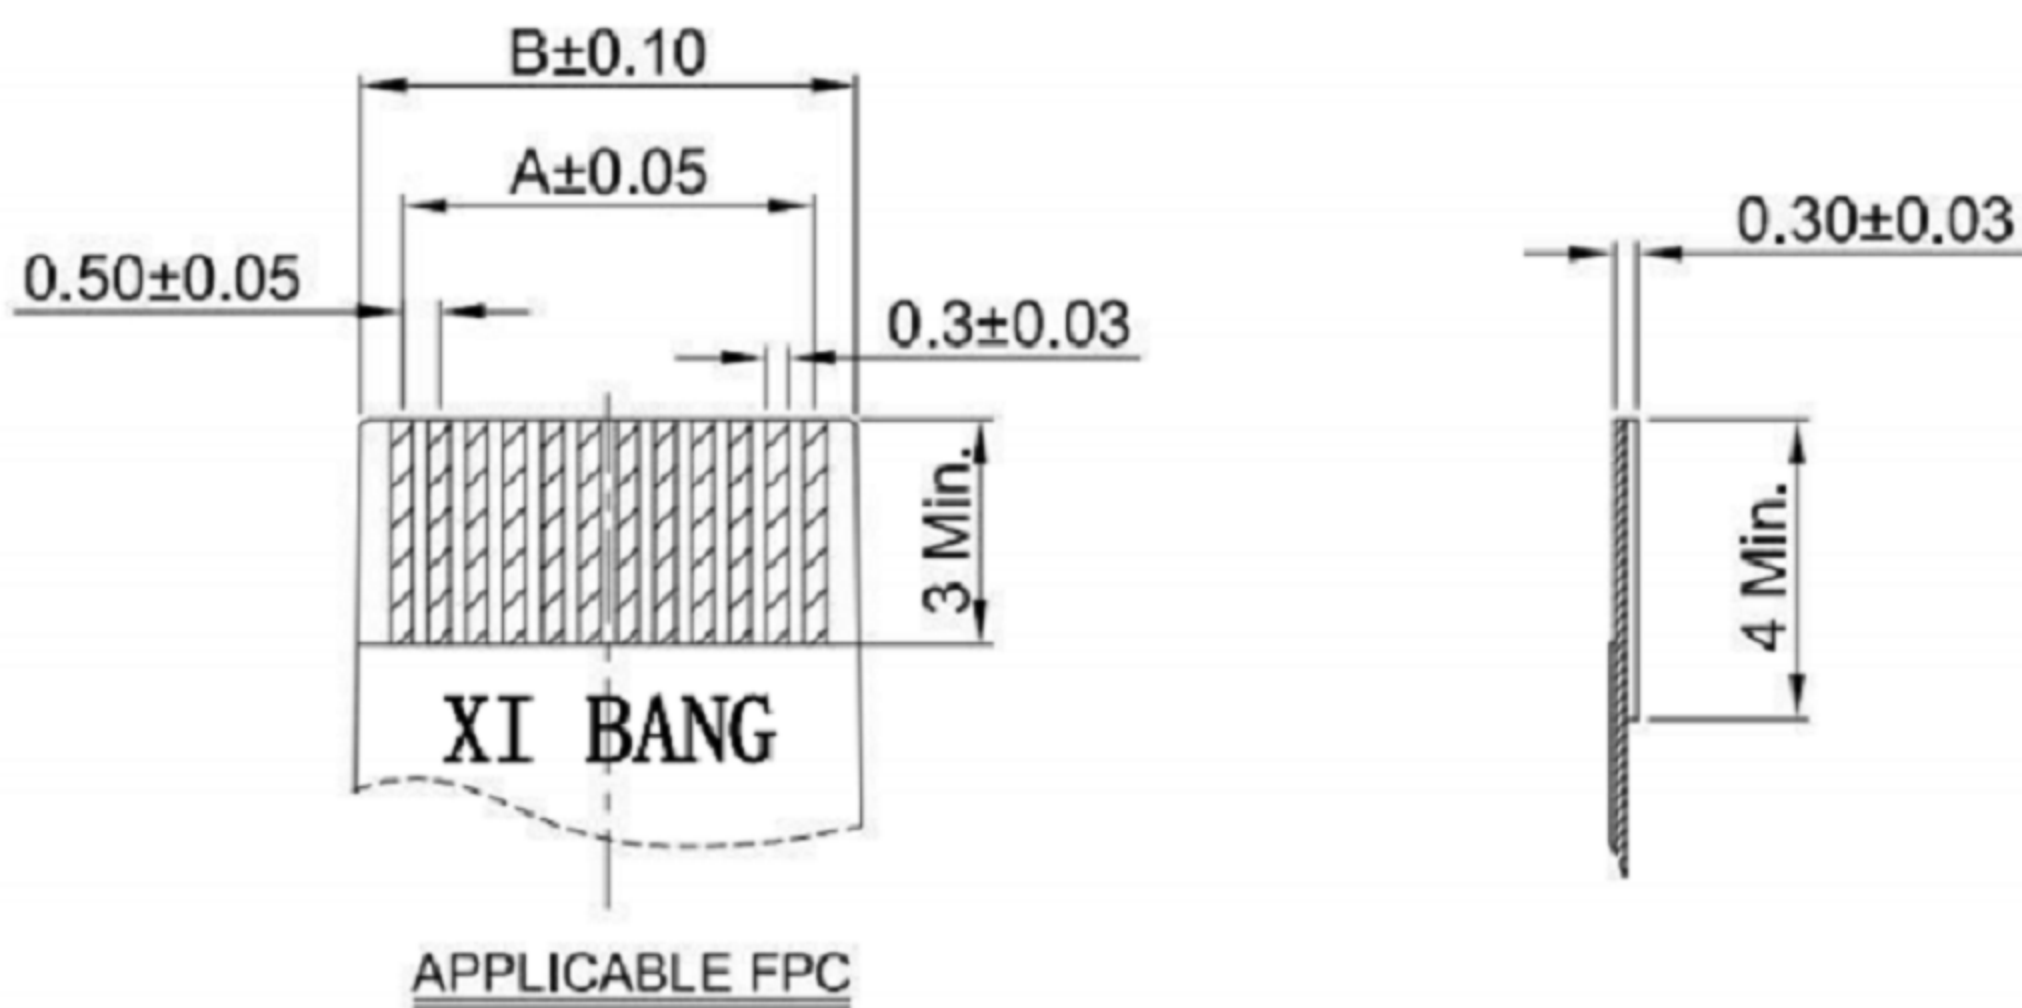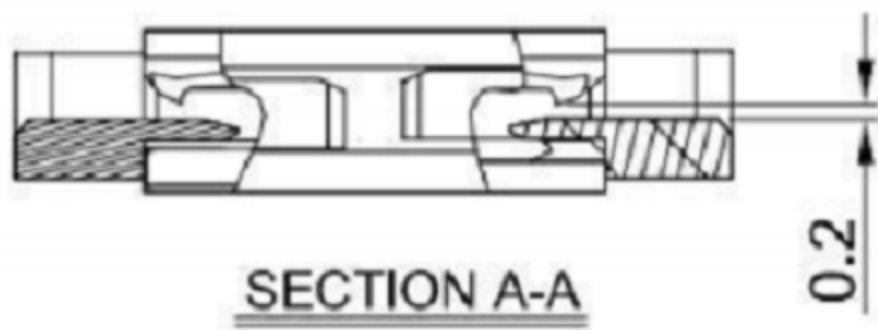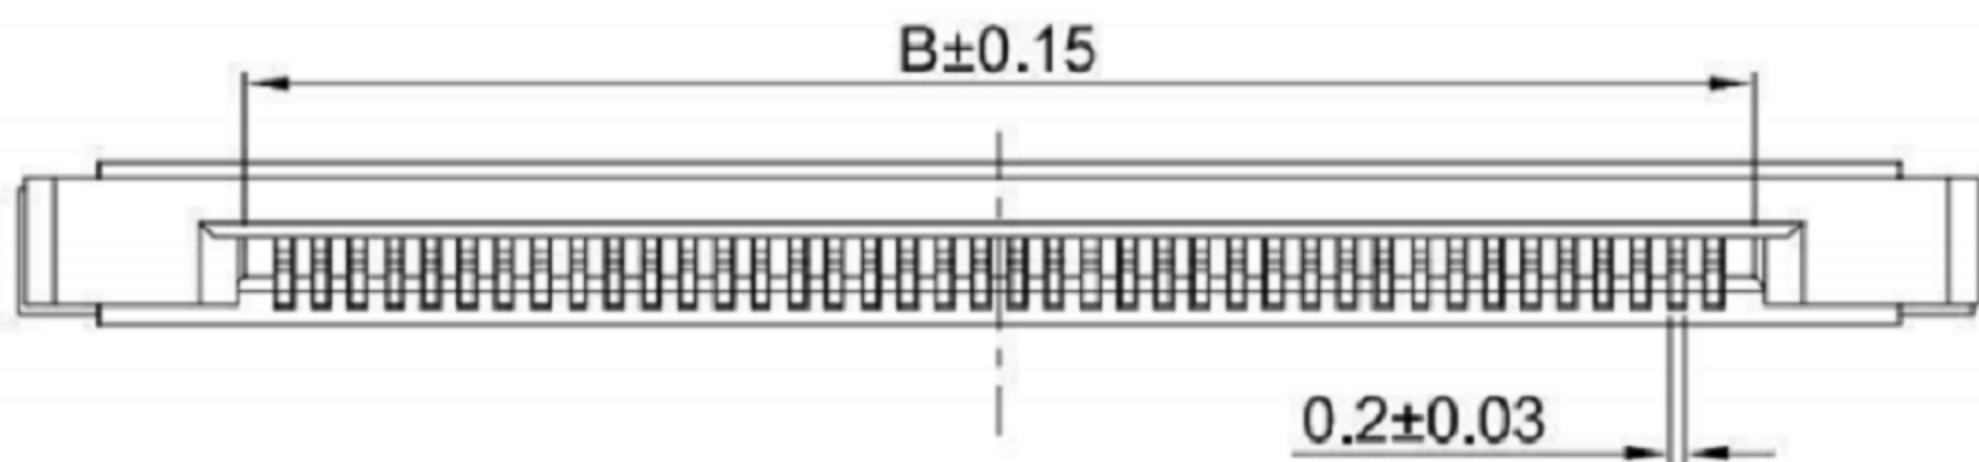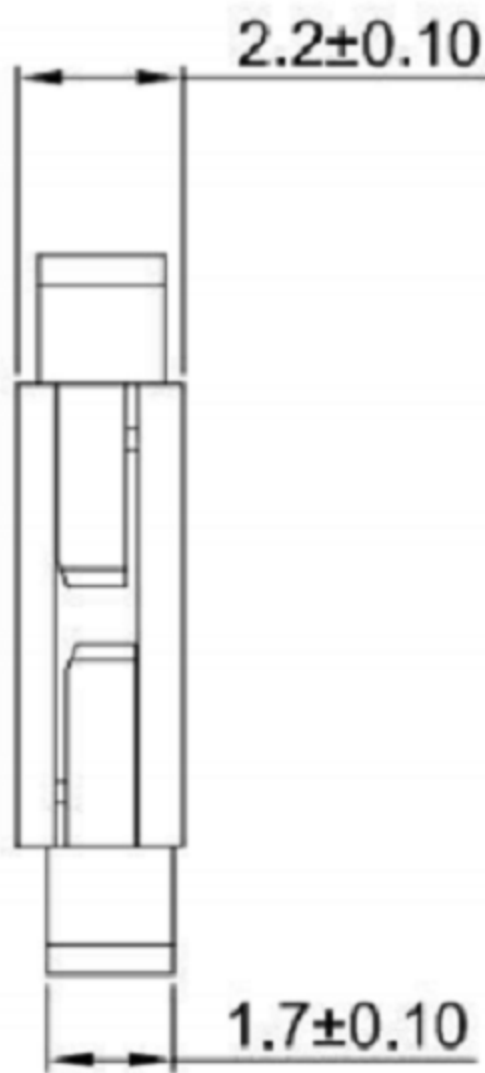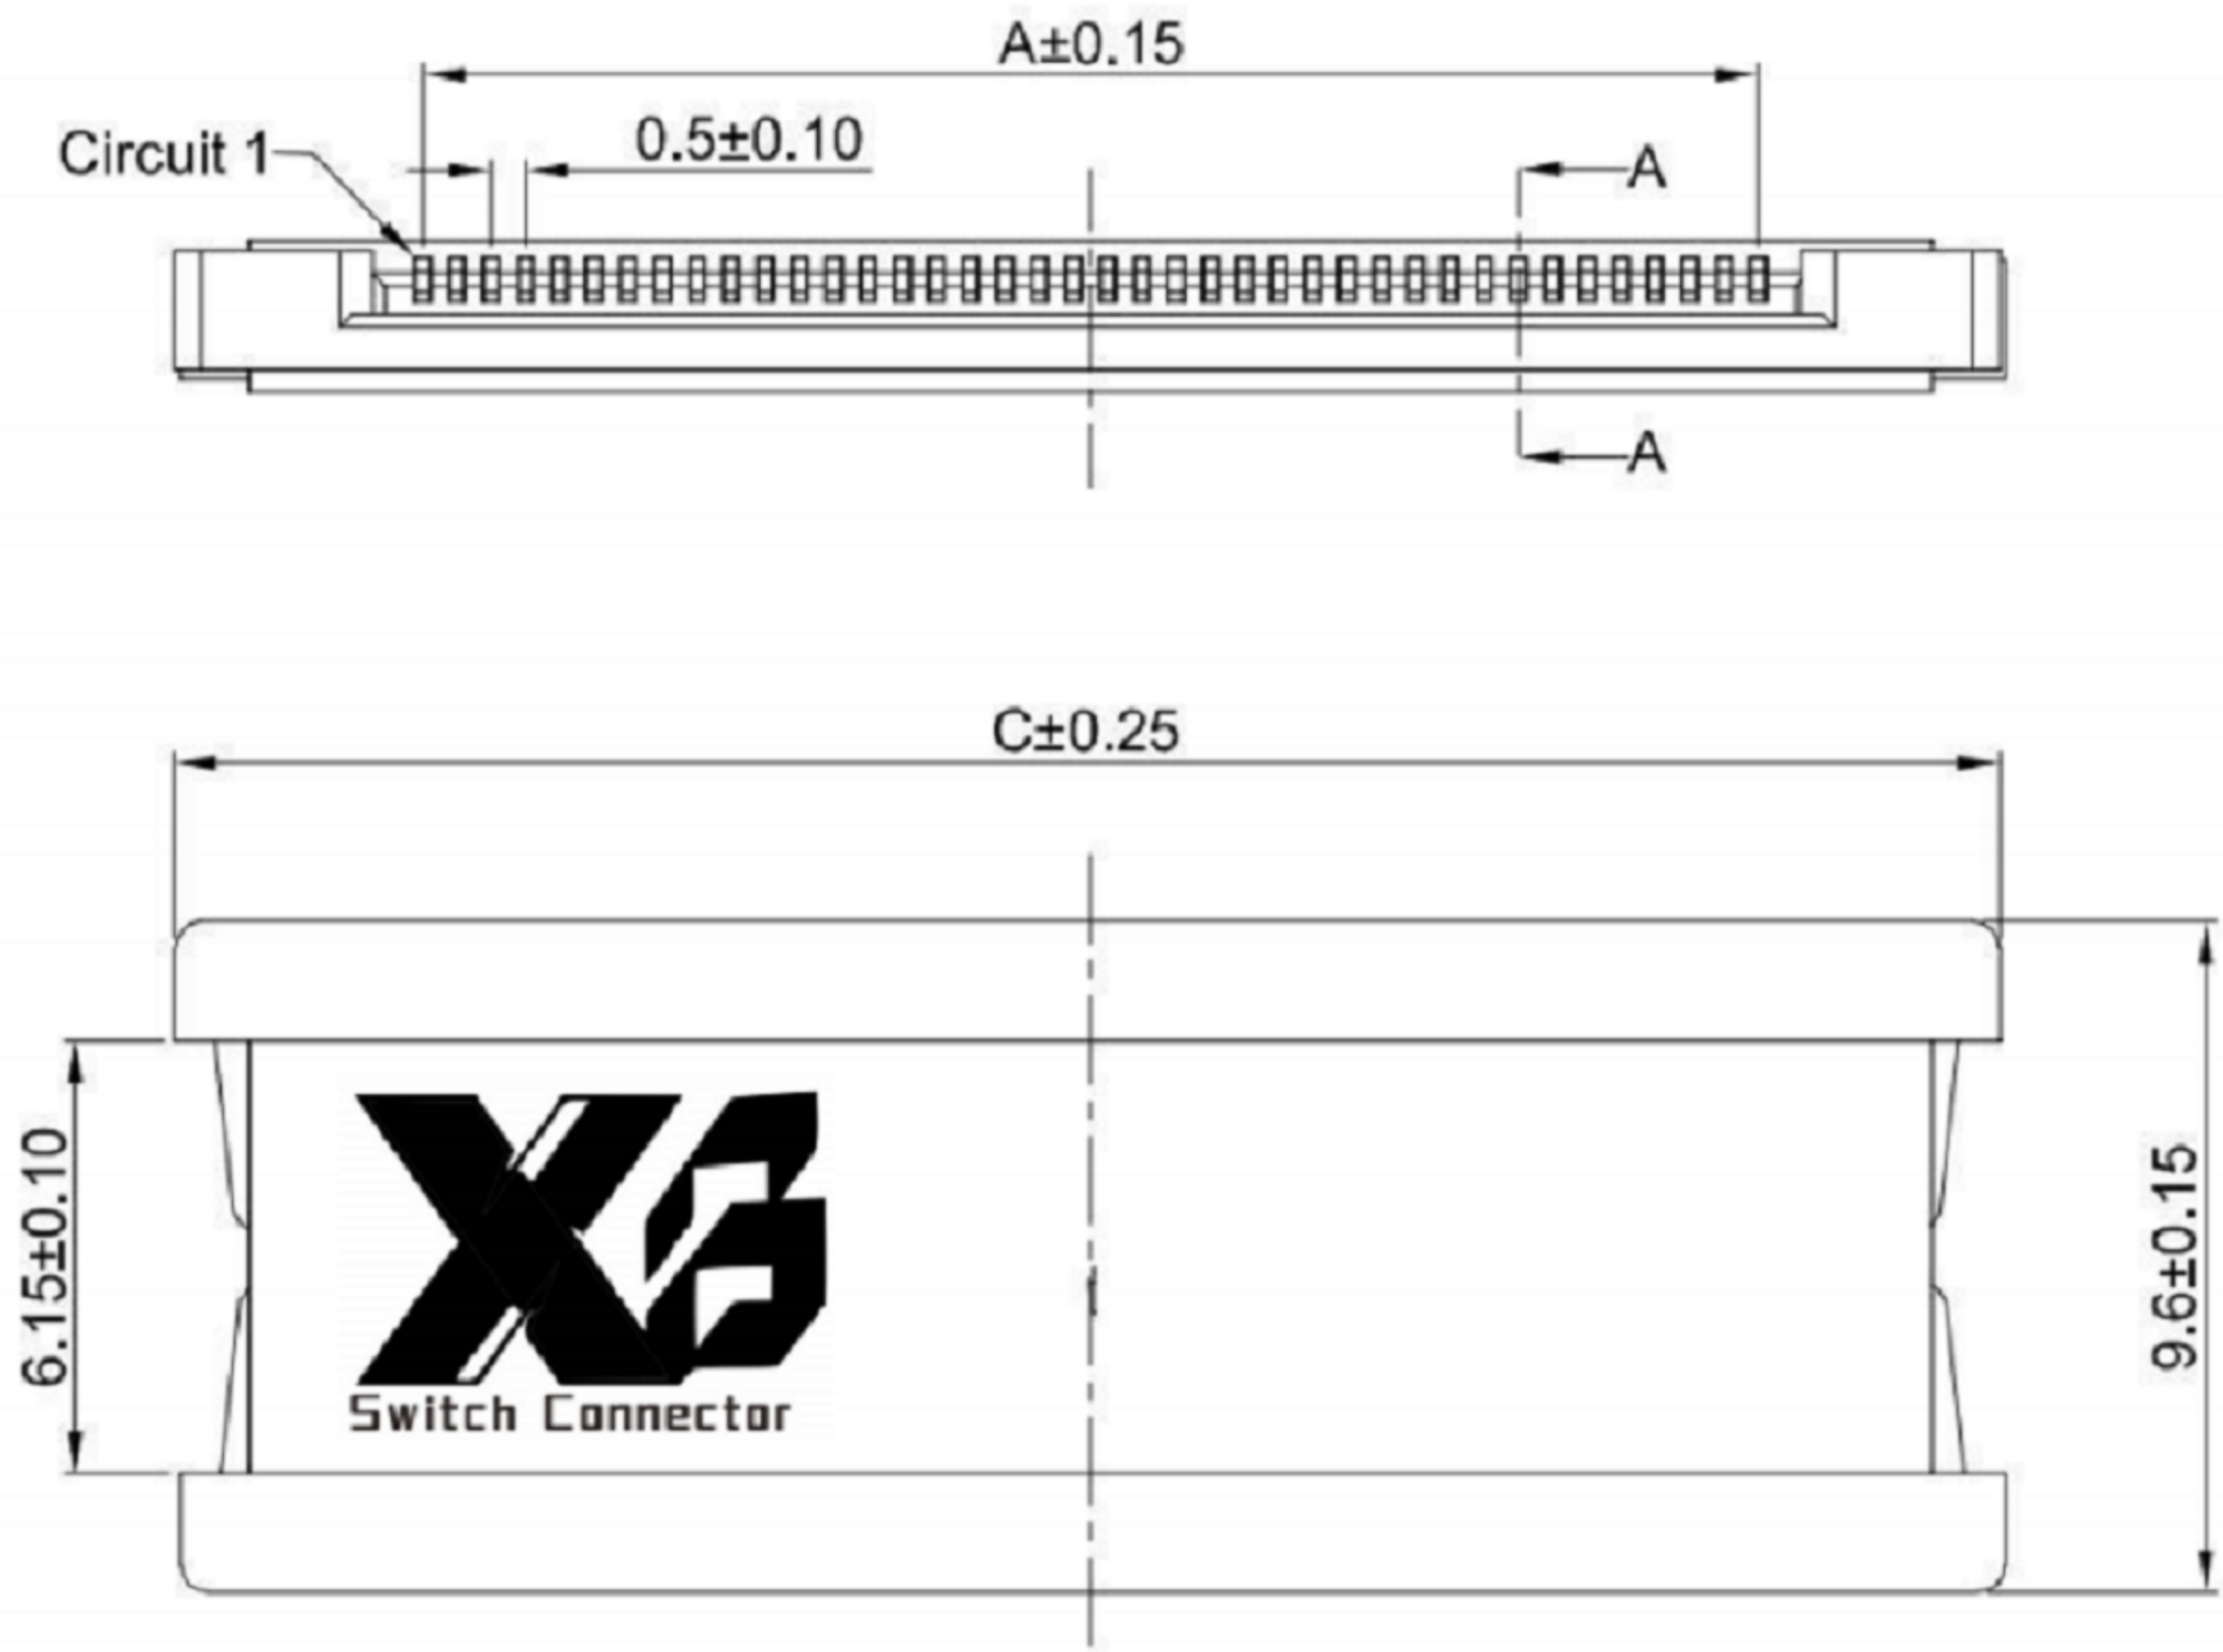

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	03/10/22	FINISH	MODLE	FPC 0.50mm Pitch 90° Air Docking Type H2.0mm Connector
CHECKED BY:	DATE	SCALE	DWG NO.	XB-FPC-0521AR22
Jacky Chen	03/10/22	1 : 1	PART NO.	
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	03/10/22			

1	更新圖面	Jack	031022
ITEM NO.	DESCRIPTION	DRAWN	DATE