

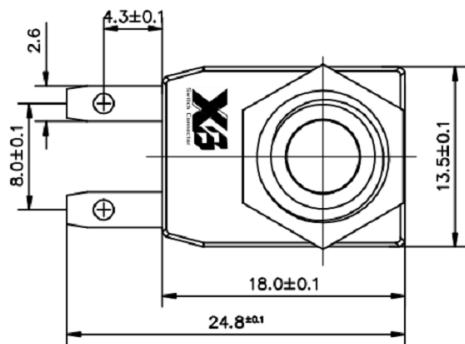
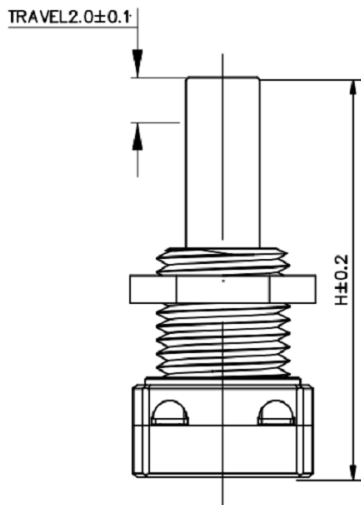


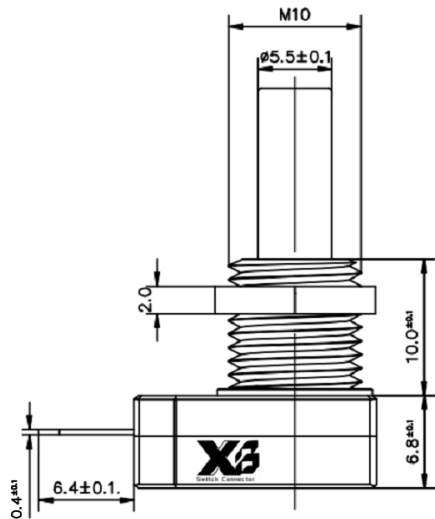

SCHEMATIC



H尺寸可根据客户定做

H: 21.3 23.3 26.3 24 25 26MM

ROHS

技术要求:

1. 电气性能
额定电流/电压: 3A/125VAC 1.5A/250VAC;
接触电阻: $\leq 100m\Omega$;
绝缘电阻: $\geq 100M\Omega$;
介电强度: $\geq 500VAC/1min$;
2. 环境温度: $-20^{\circ}C \sim 85^{\circ}C$;
3. 未注公差均按GB / T1804-m级。

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing is subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD												
		TITLE : PUHS BUTTON SWITCH									MODEL : XB-PBS-01-2P			
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3		ANGLE ±2°		7	SPRING	STEEL WIRE	1	NATURE
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE						6	STEEL BALL	STEEL	1	NATURE
VERSION 01		APPD.	FEI. LONG. HE	DATE						5	BOARD	PHENOLIC RESIN	1	NATURE
										4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
										3	FRAME	IRON STRIP	1	Ni PLATED
										2	TERMINAL	BRASS STRIP	8	Ag PLATED
										1	KNOB	POM	1	BLACK
										NO.	PART NAME	MATERIAL	QTY.	FINISHING