


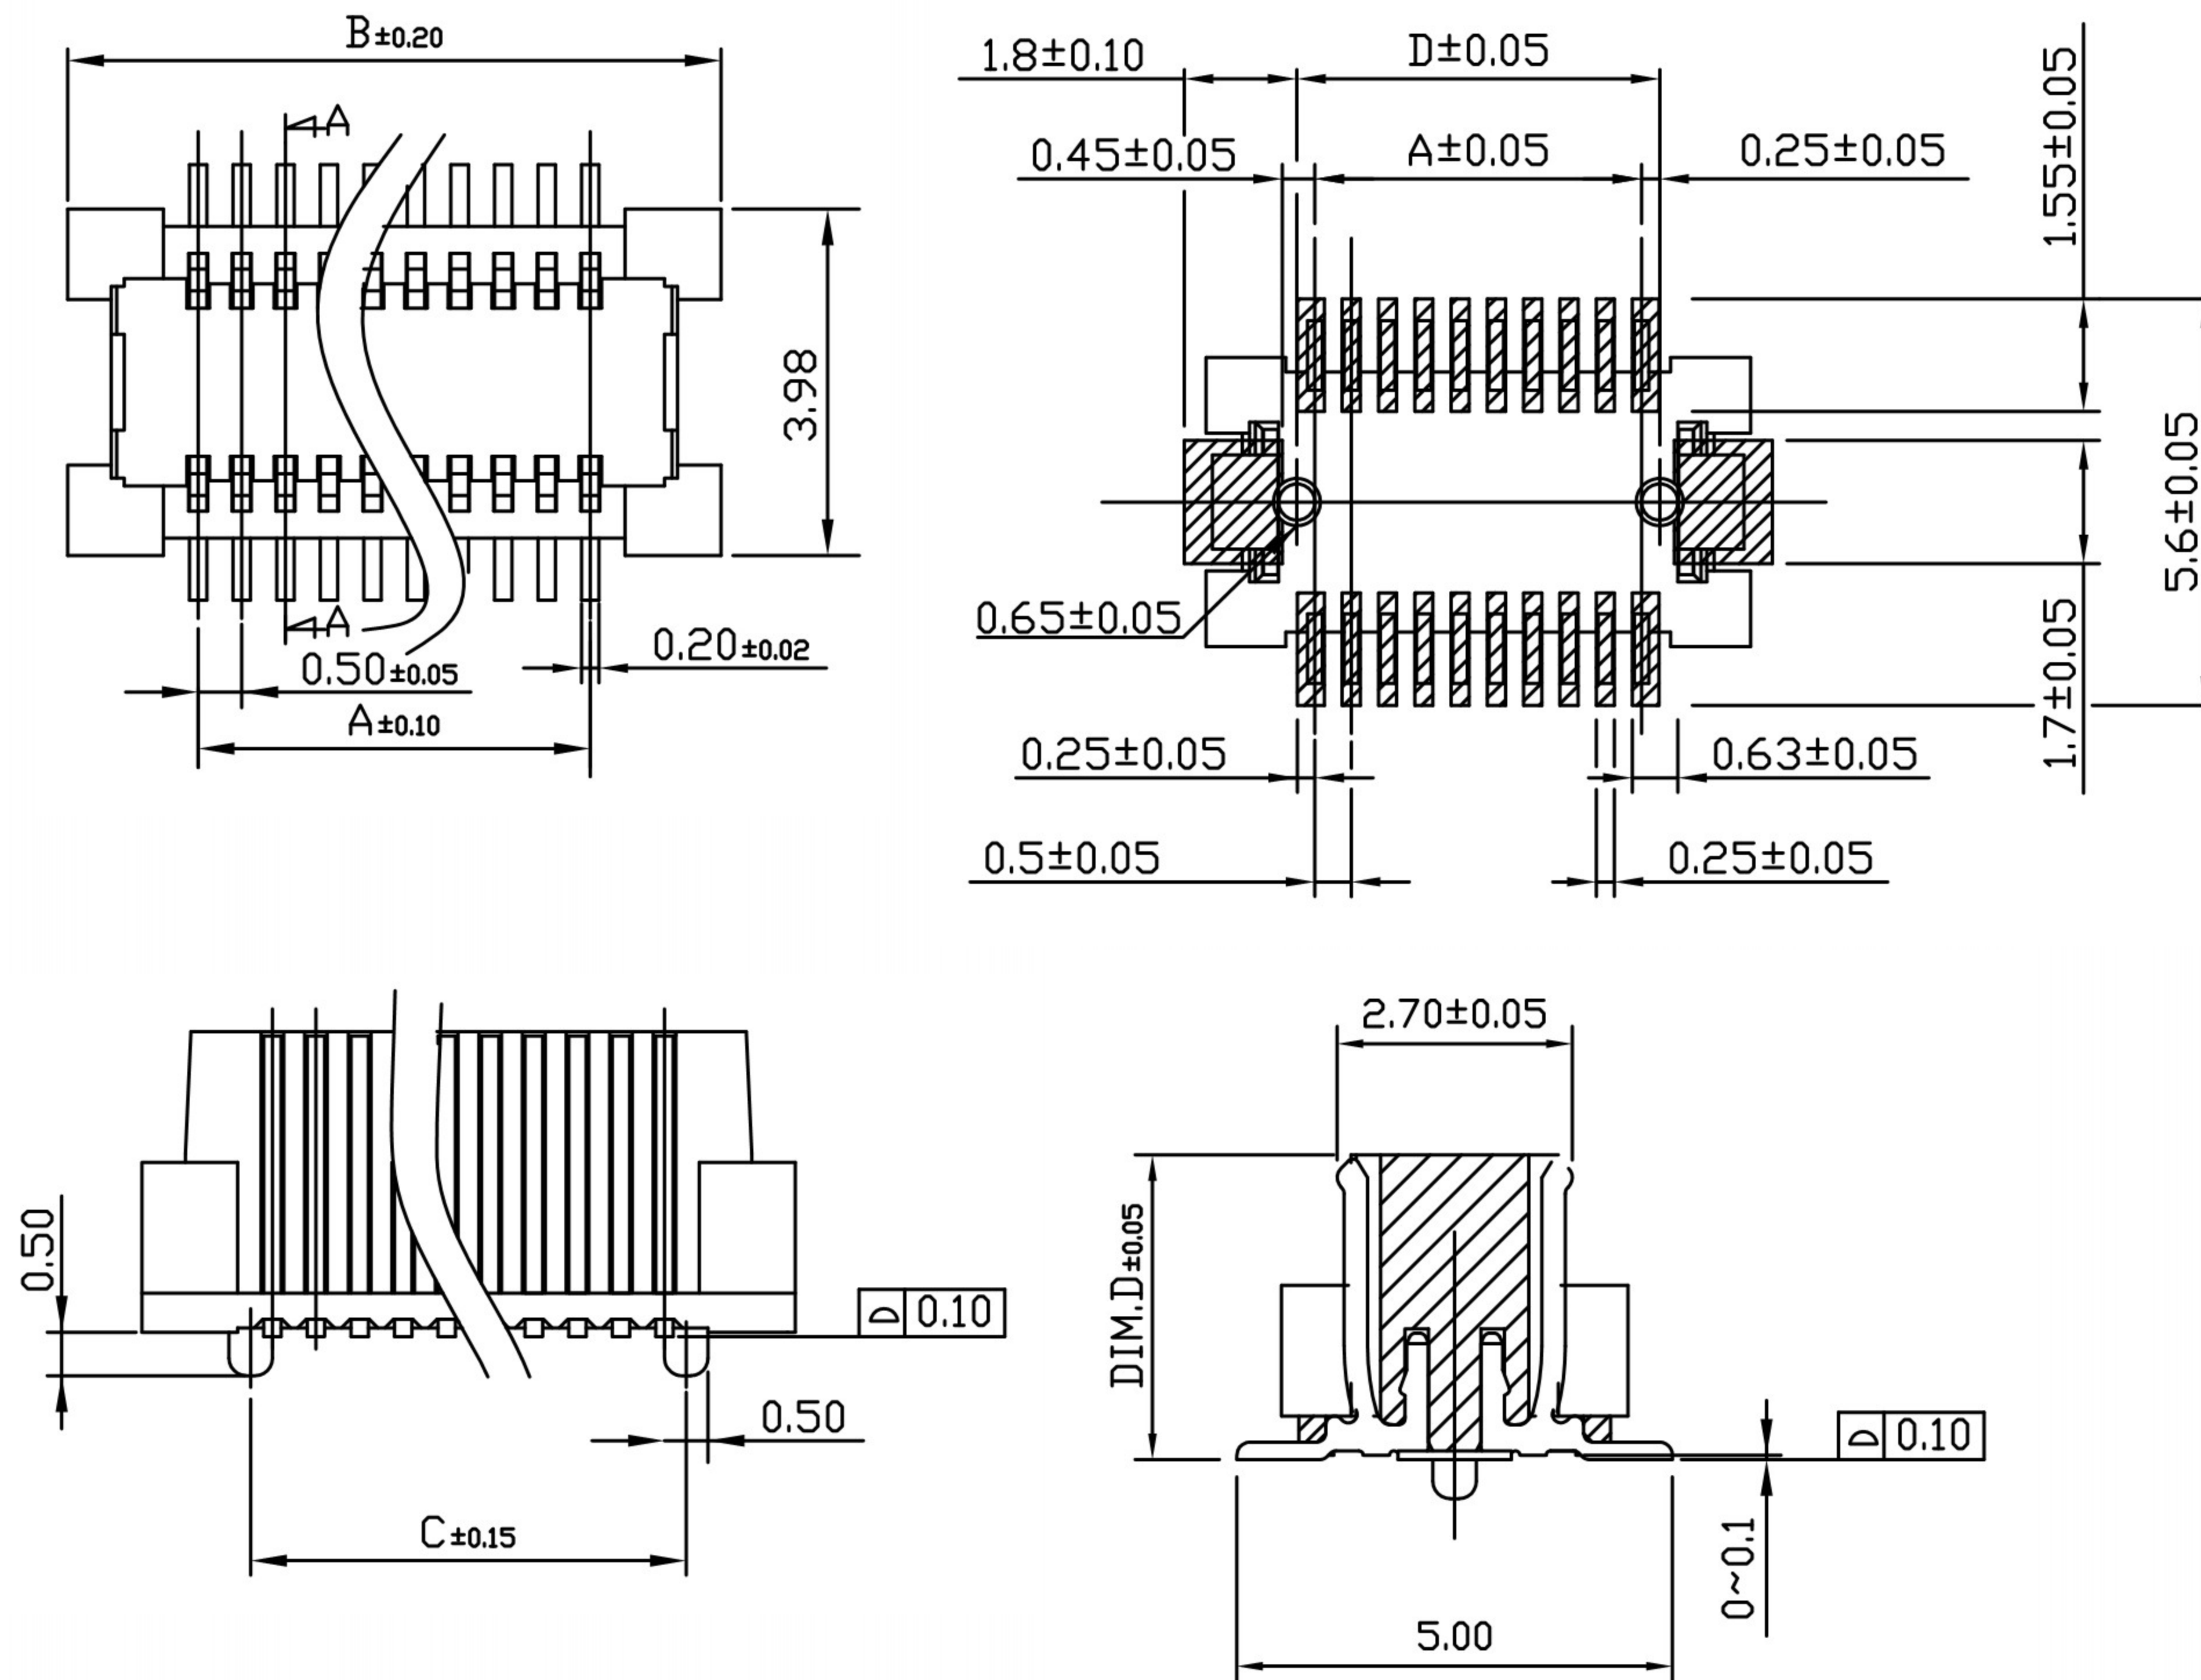

Material:

* Insulation:

Glass filled Polyamide UL 94V-0
Color Black

* Contact: Copper alloy, t=0.2mm

* Fixed Tab: Brass, t=0.2mm

* Plating code: Gold flash over Nickel

DIM.A = 0.50 * No. of Spaces

DIM.B = DIM.A + 3.0

DIM.C = DIM.A + 0.5

* Available in 10 through 80 circuits

X1015 W M-XX X-X

① ② ③ ④ ⑤ ⑥

① Series No.

② Category: W-WAFER

③ Welding Board Angle: M-Male

④ No. of Circuits

⑤ Special No: S-With Positioning Column



⑥ Height:

A: Dim.D= 2.0mm (Circuits:10~80pin)



C: DIM.D= 3.0mm (Circuits:10~60pin)

D: DIM.D= 3.5mm (Circuits:10~60pin)

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR				
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: XB-X1015_1				
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:				
				4<L ≤ 16	±0.3		APPD		SIZE: A4					
				16<L ≤ 63	±0.4									
				L > 63	±0.5									
					DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES			DONG GUAN XI BANG ELECTRONIC CO., LTD			
REVISIONS												WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com													1/1	A0

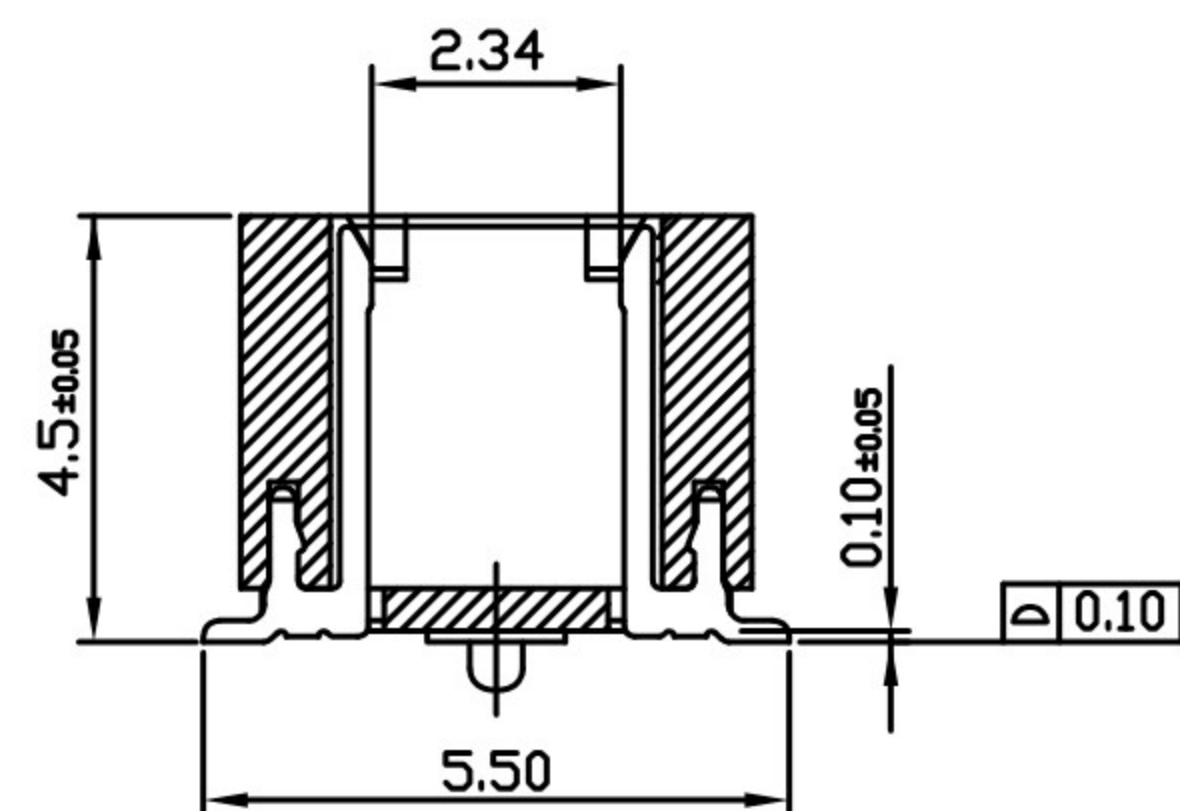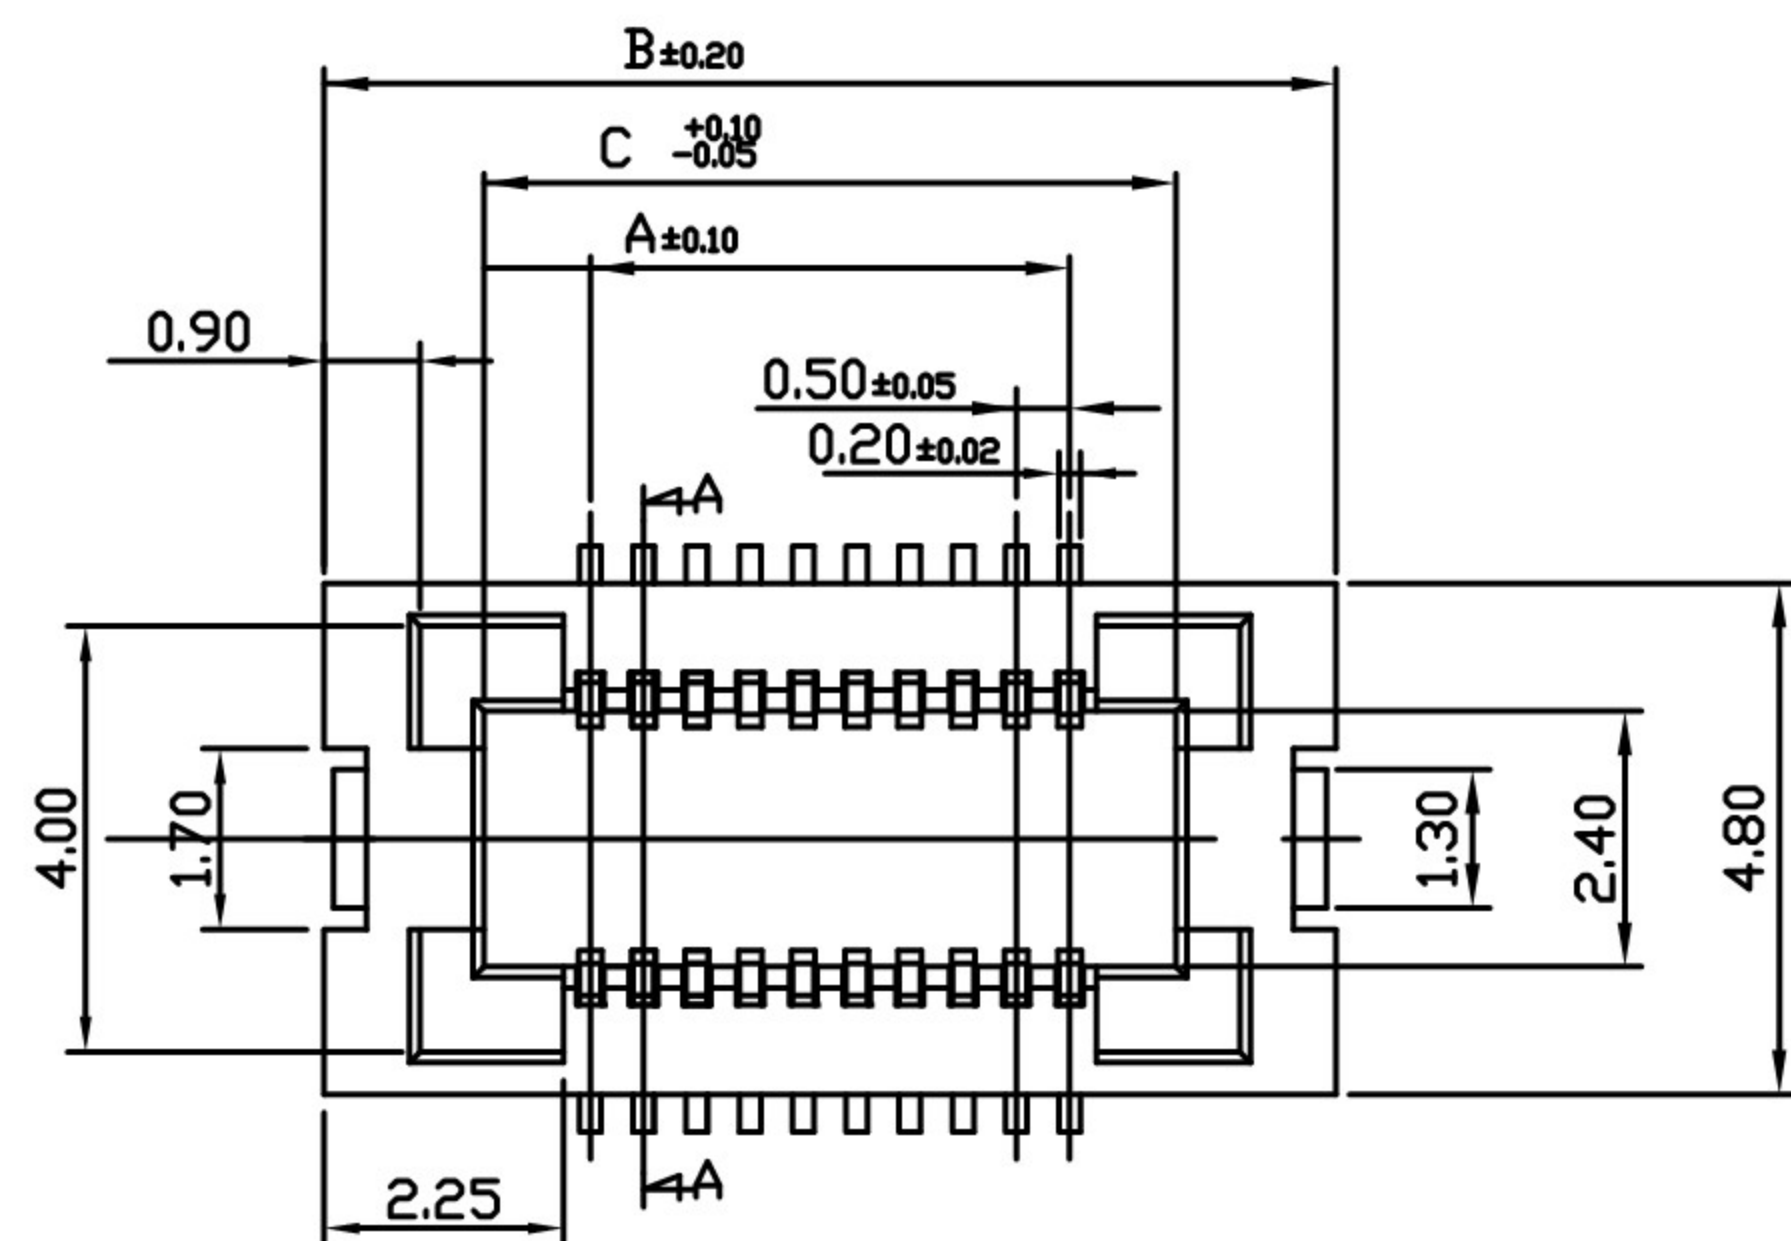

DIM.A = 0.50 * No. of Spaces
 DIM.B = DIM.A + 5.0
 DIM.C = DIM.A + 2.0
 DIM.D = DIM.A + 2.5
 * Available in 10 through 80 circuits

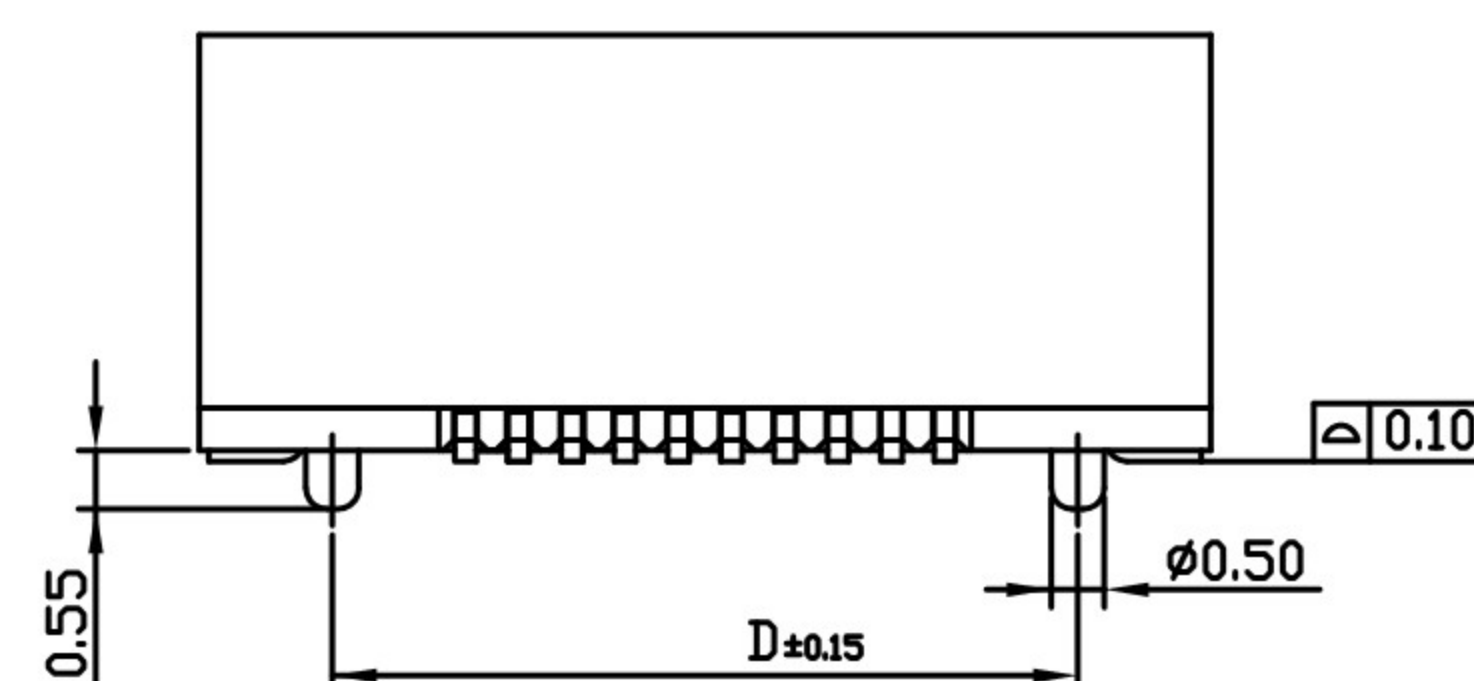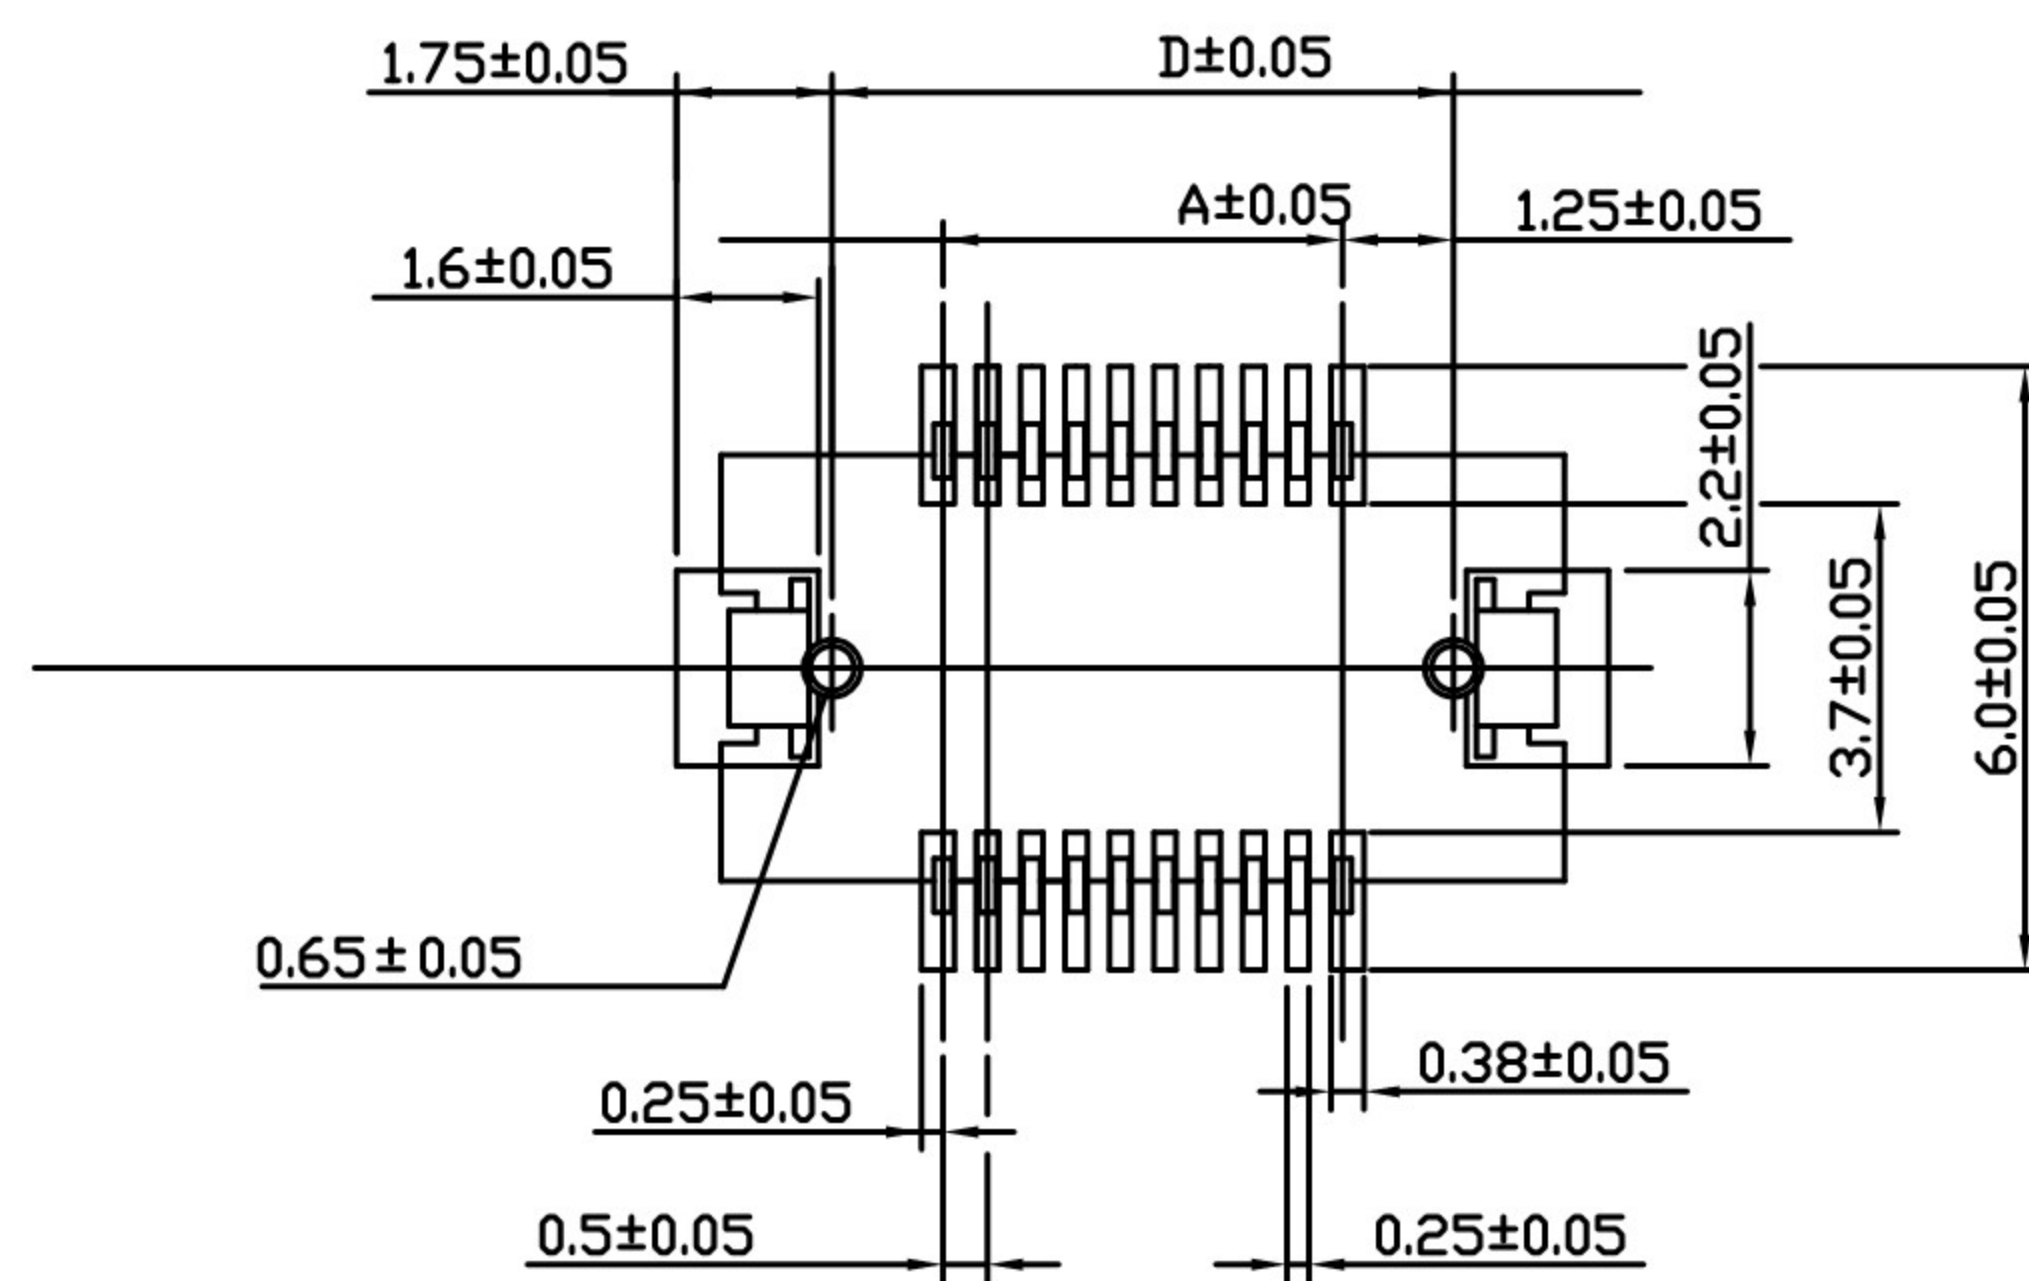

X1015 W F-XX X-X

① ② ③ ④ ⑤ ⑥

- ① Series No.
- ② Category: W-Wafer
- ③ Weding Board Angle: F-Female
- ④ No. of Circuits
- ⑤ Special No: S-With Positioning Column
- ⑥ Height:
 - A: Dim.E= 2.0mm B: Dim.E= 2.5mm F: Dim.E=4.5mm
 - C: Dim.E= 3.0mm E: Dim.E= 4.0mm

							DSND		SCALE: N/A	MODEL TYPE: BTB CONNECTOR			
				ANGLAR	±5°		DWN		VIEW: 	PART NO.: XB-X1015_2			
				L ≤ 4	±0.2		CHKD		UNIT: mm/in	DWG NO.:			
				4 < L ≤ 16	±0.3		APPD		SIZE: A4				
				16 < L ≤ 63	±0.4								
	DATE	REVISED	APPROVED	L > 63	±0.5								
REVISIONS					UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com												1/1	A0