

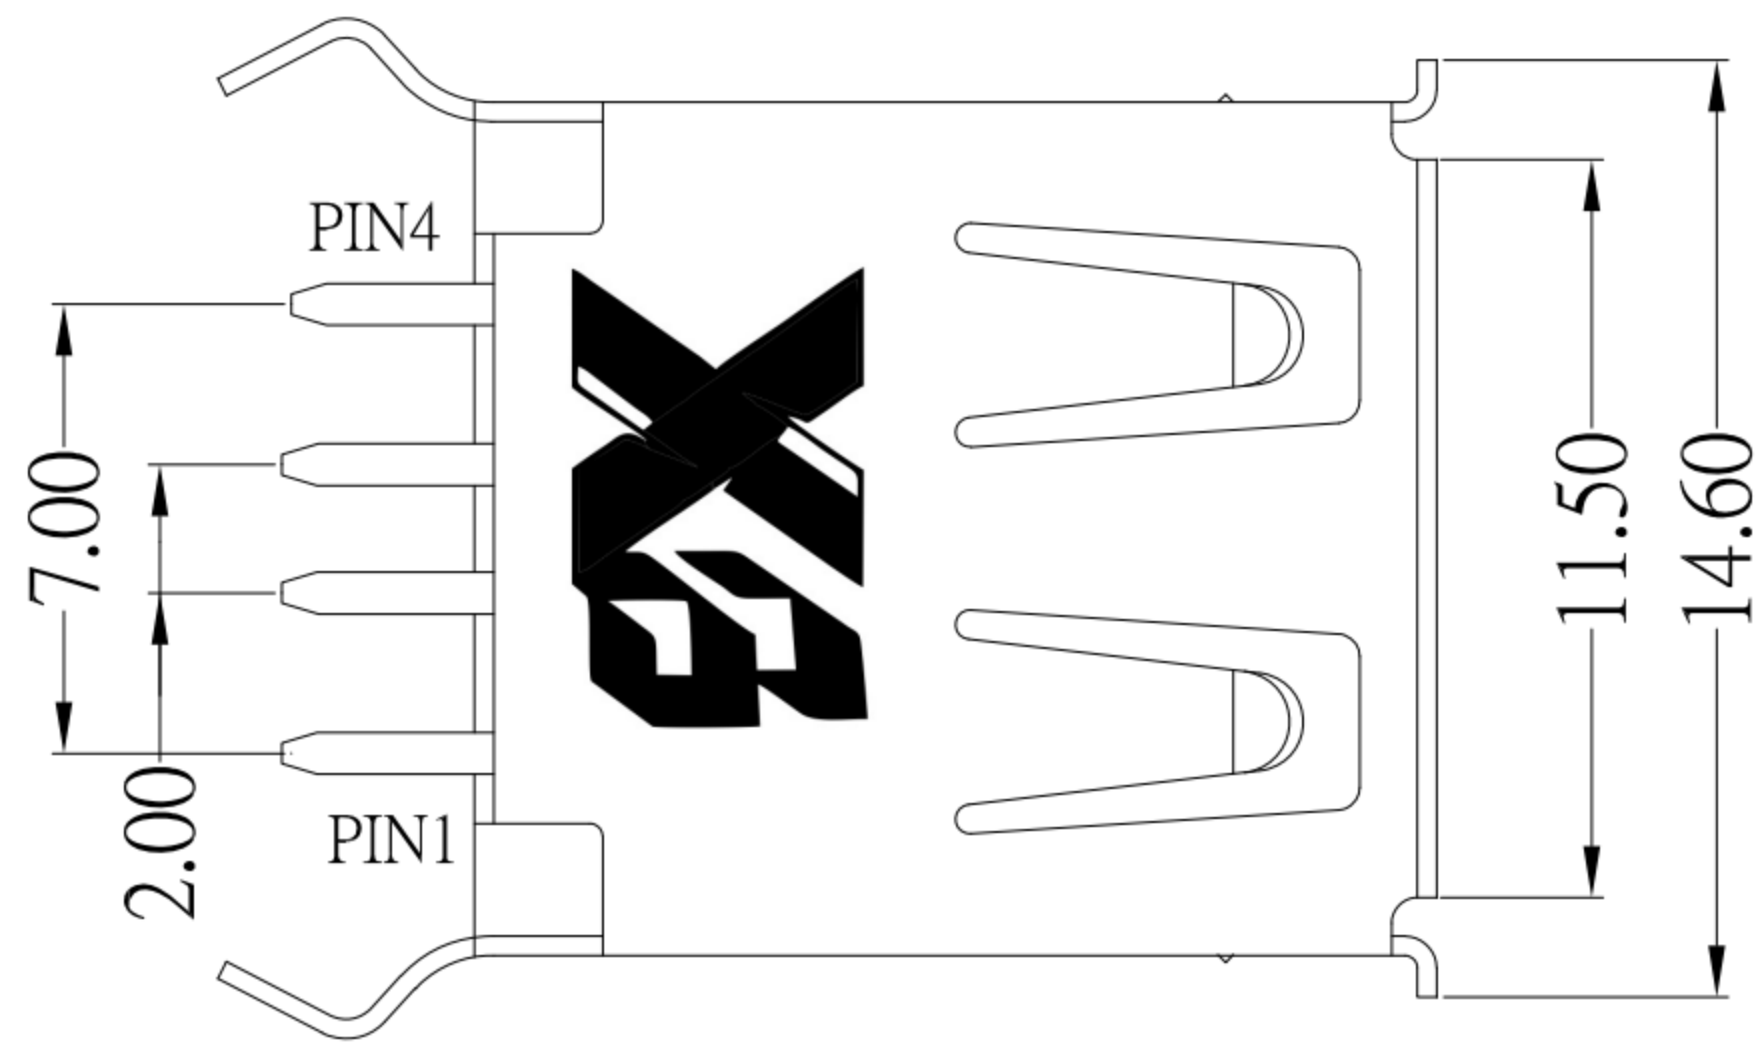
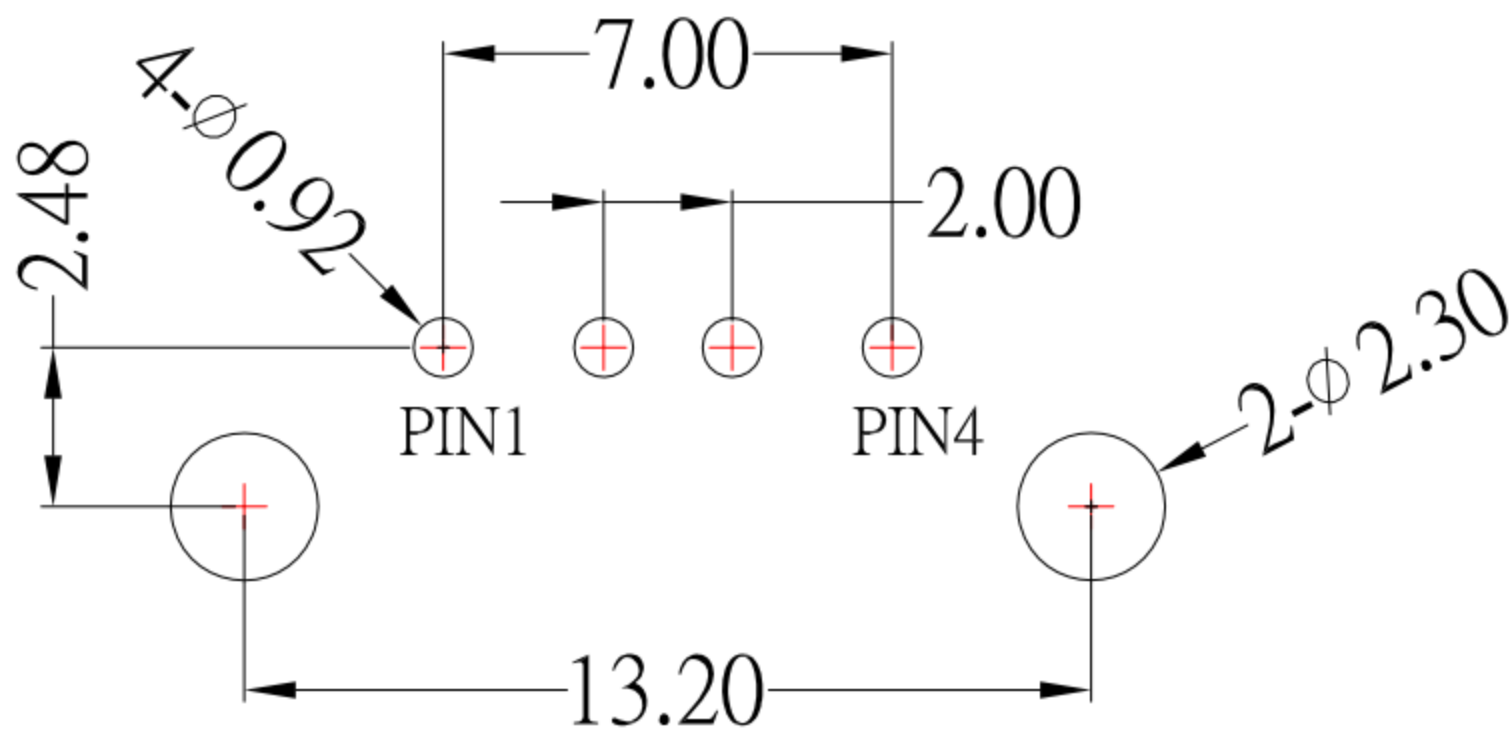
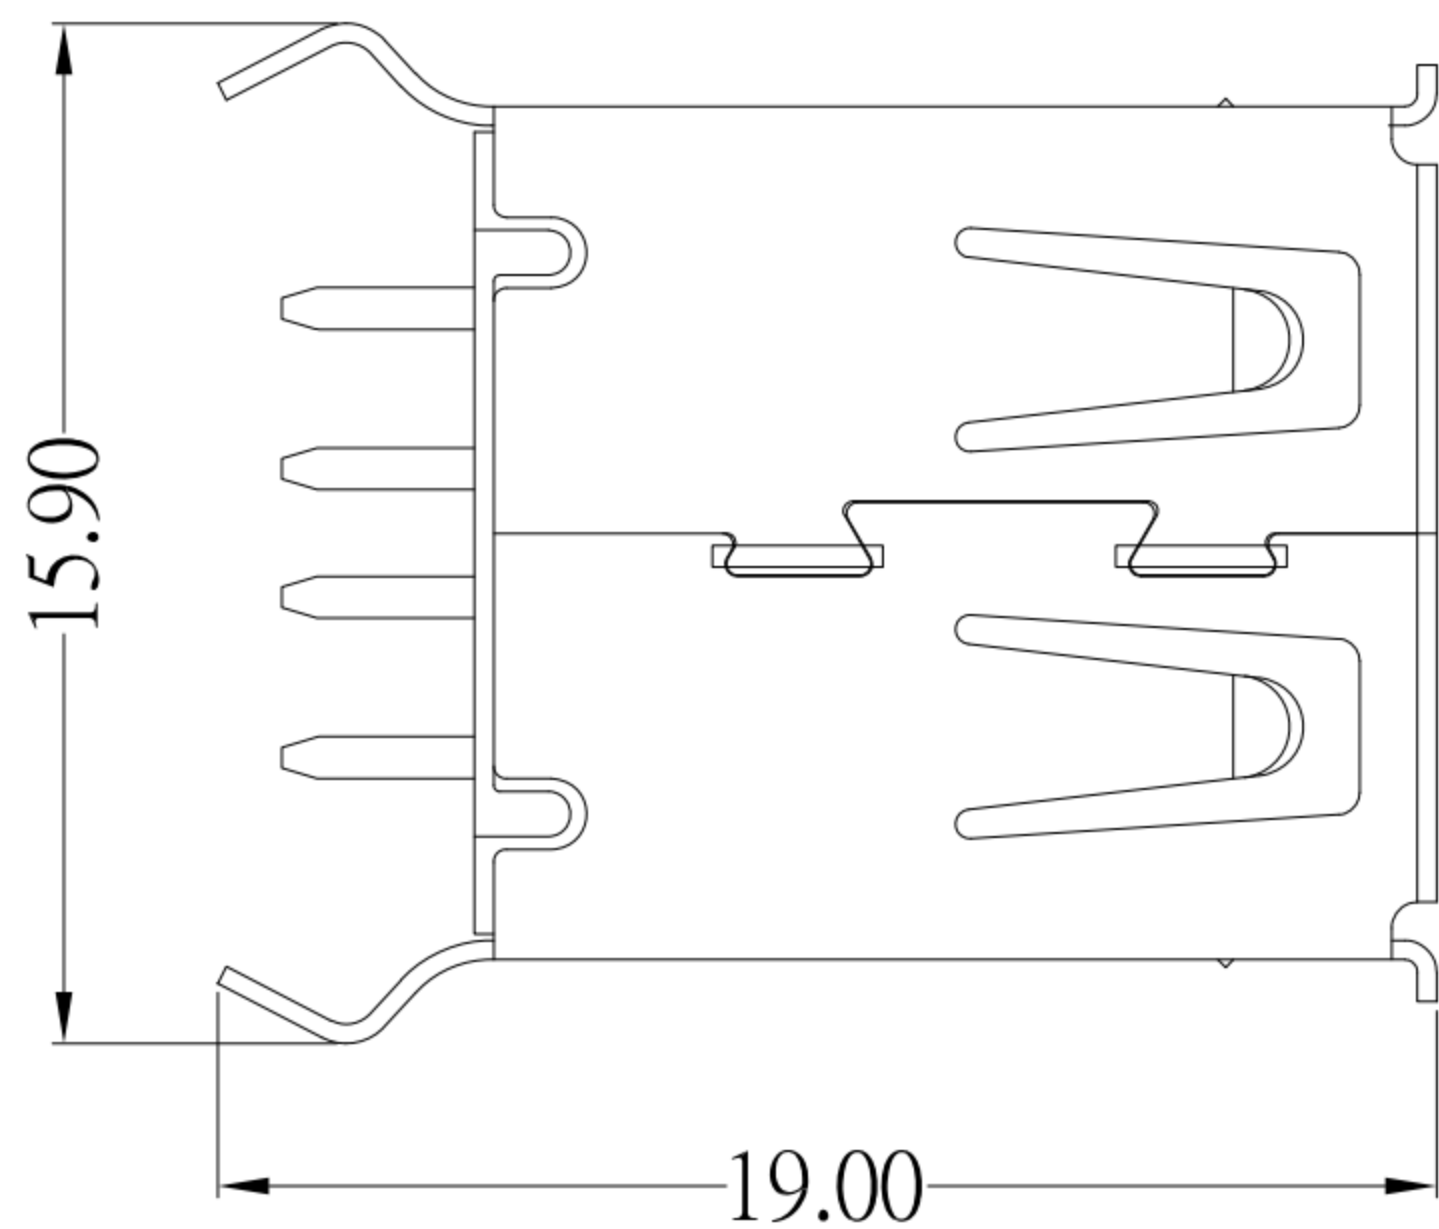


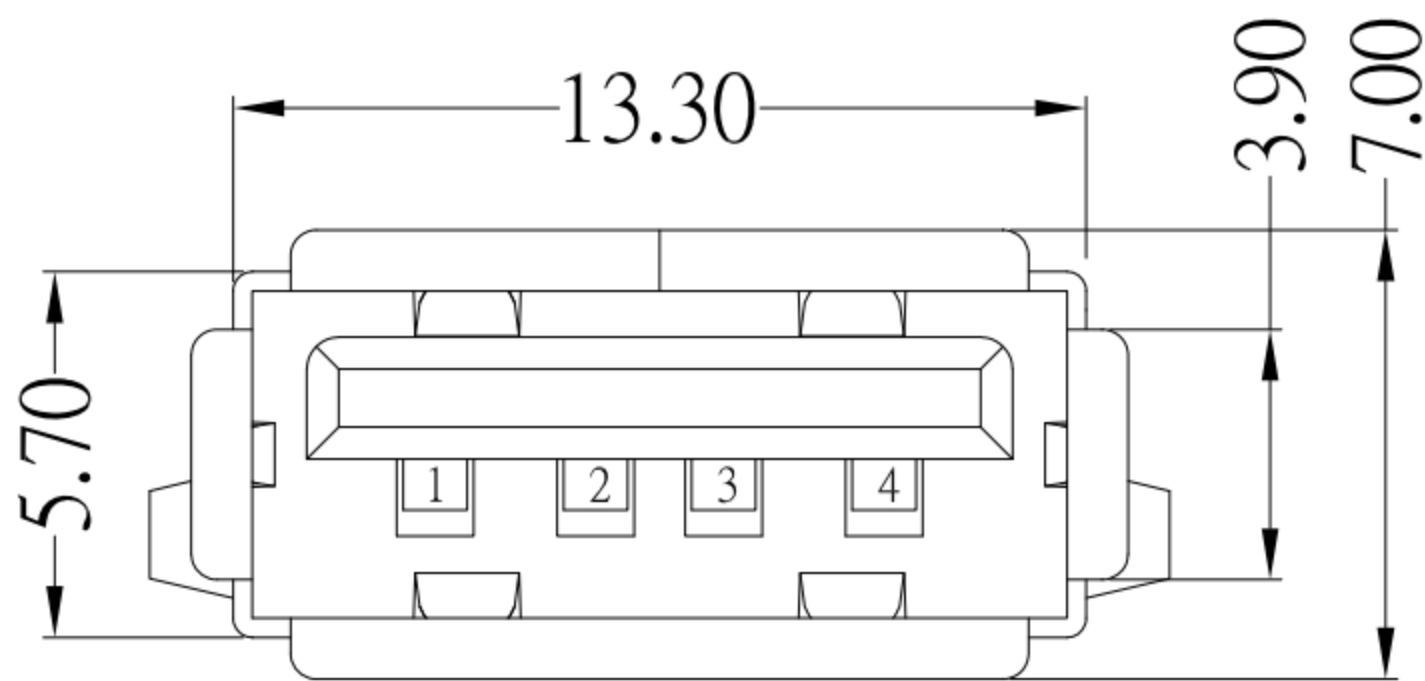

SUA-110V-x-x-S129

鍍層厚度 : COLOR :

Blank : 1u"	Black: B
2 : 15u"	White : W
3 : 30u"	

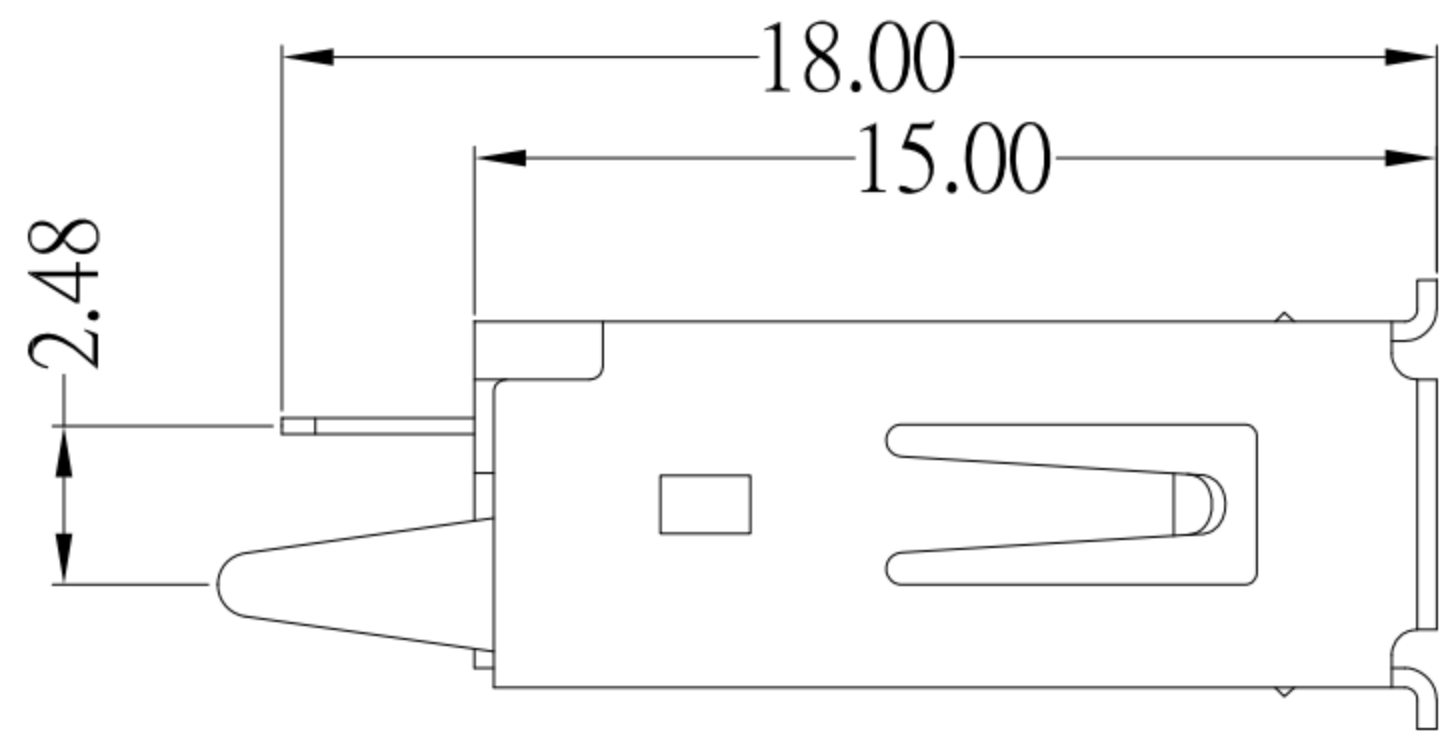


P.C.B LAYOUT MOUNTING PATTERN

SPECIFICATIONS

- 1.MATERIAL:
- a.HOUSING:PBT
 - b.CONTACT:BRASS
 - c.SHEEL: BRASS
- 2.PLATING :
- a.CONTACT: Plated Gold in Mating Area ;
Tin Plated on Solder Balls ;
Nickel under plated overall
 - b.PLATING: Nickel under Plated surface layer
- 3.ELECTRICAL:
- a.DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
 - b.INSULATION RESISTANCE: 1,000MΩ MIN
 - c.CONTACT RESISTANCE: 30 mΩ MAX;
- 3.MECHANICAL:
- a.INSERTION FORCE: 3.57kg MAX
 - b.WITHDRAWAL FORCE: 1.02kg MIN

 **东莞市溪榜电子有限公司**
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S		UNITS	MM
-------------------------------------	--	-----------------	---	-------	----

DRAWN BY:	DATE	MAT'L		TITLE	CONNECTOR
Jack Lu	06/19/19	FINISH		MODLE	USB AF VERTICAL TYPE DIP
CHECKED BY:	DATE	SCALE	1 : 1	DWG NO.	SUA-110V-x-x-S129
Jacky Chen	06/19/19	SHEET NO.	1 of 1	PART NO.	SUA-110V-x-x-S129
APPROVED BY:	DATE				
Tony Kao	06/19/19				

4	更新尺寸	Jack	061919
3	新增PIN編號	Jack	062118
2	更新尺寸	Jack	050917
1	更新spec及材質	Jack	110813
ITEM NO.	DESCRIPTION	DRAWN	DATE