



SCHEMATIC



1. Blade switch
2. Base: POM/PA66
3. Terminal: Phosphorus copper
4. Contact point: Purple copper
5. Electroplating: Silver/Gold Plating
6. Temperature range for use:  $-10\text{ }^{\circ}\text{C} \pm 60\text{ }^{\circ}\text{C}$
7. Current and voltage: 0.5A 12V DC
8. Operating force: 30GF  $\pm$  10GF
9. Voltage withstand: 500V 0.5mA/min
10. Insulation resistance: 100M  $\Omega$
11. Contact resistance: 30M  $\Omega$
12. Lifetime: 50000 times

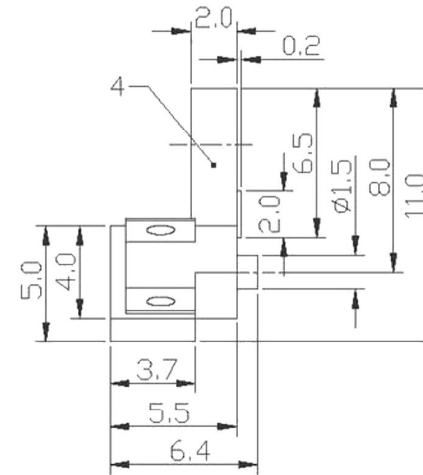

|         |                |
|---------|----------------|
| TITLE : | LF LEAF SWITCH |
| MODEL : | LF-013 (W009)  |



|         |       |       |  |      |  |                                          |                      |     |           |           |      |           |
|---------|-------|-------|--|------|--|------------------------------------------|----------------------|-----|-----------|-----------|------|-----------|
| UNIT :  | MM    | DWN.  |  | DATE |  | TOLERANCE<br><br>≤5mm ±0.1<br>＞ 5mm ±0.2 | ANGLE TOL<br><br>±2° | 3   | CASE      | POM       | 3    | BLACK     |
| SCALE : | 3 : 1 | CHK'D |  | DATE |  |                                          |                      | 2   | CONTACT   | PBS STRIP | 2    | NATURE    |
| VERSION | 01    | APPD. |  | DATE |  |                                          |                      | 1   | KNOB      | POM       | 1    | BLACK     |
|         |       |       |  |      |  |                                          |                      | NO. | PART NAME | MATERIAL  | QTY. | FINISHING |