

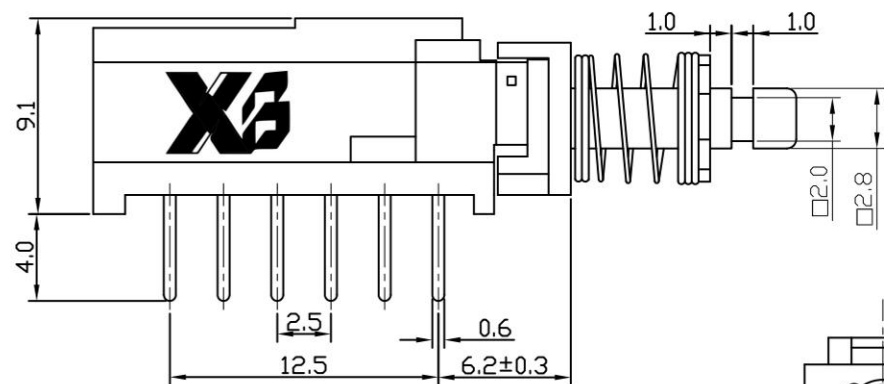
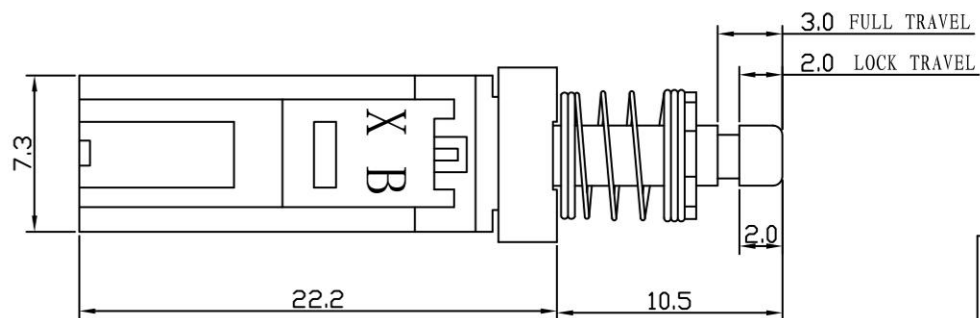
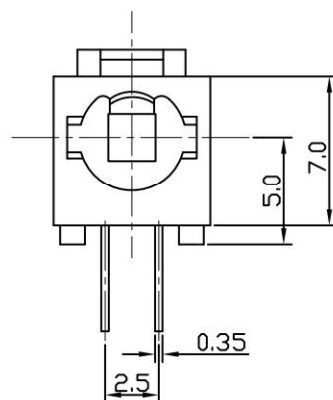


P.C.B LAYOUT

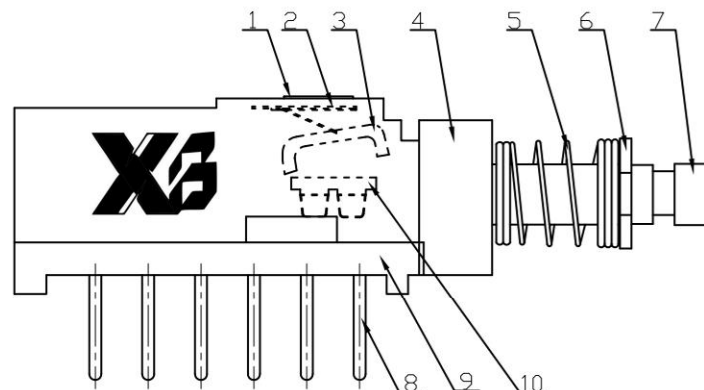

ROHS

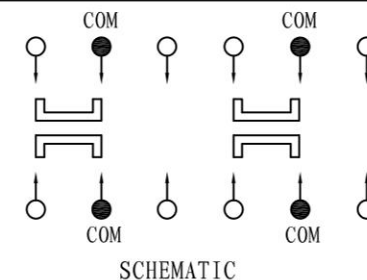

ITEM: PERFORMANCE

Title: PUSH BUTOMN SWICH

Model: XB-PBS-42D04

Rating: 0.3A 0.5A 12V 30V DC

Function: 4P2T

Timing: Non-shorting

ContactResistance(mohms):50mΩ max

Insulation Resistanc(Mohms):100MΩ min at 500V DC

Dielectric Strength(V):AC 500V for 1 min

LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS42D04 (W01002)



TOLERANCE

ANGLE TOL

< 10.0mm ± 0.2

>=10.0mm ± 0.3

± 2°

10	CLIP	PBS	4	Ag CLAD
9	BASE	NYLON	1	
8	TERMINAL	BRASS STRIP	12	Ag PLATED
7	KNOB	POM	1	WHITE
6	RING	IRON	1	Ni PLATED
5	SPRING	SUS	1	NATURE
4	SLEEVE	POM	1	
3	FIXED ROD	SUS	1	NATURE
2	SPRING PLATE	SUS	1	NATURE
1	CASE	PBT	1	GRAY
NO.	PART NAME	MATERIAL	QTY.	FINISHING

UNIT : MM		DWN.	蓝金伶	DATE	2018-07-07	TOLERANCE	ANGLE TOL ± 2°
SCALE : 3 : 1		CHK'D	何坚	DATE	2018-07-07	< 10.0mm ± 0.2	
VERSION	01	APPD.	周丽琼	DATE	2018-07-07	>=10.0mm ± 0.3	