

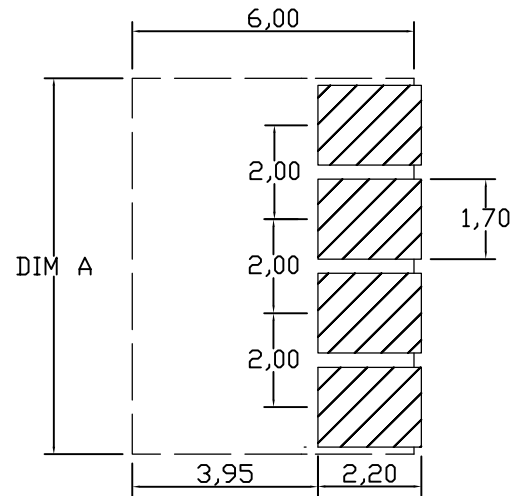
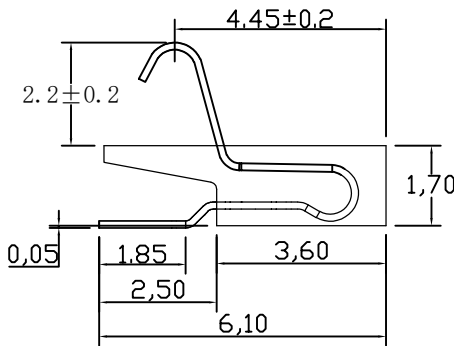
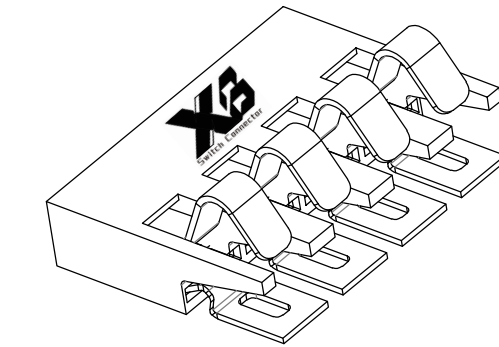
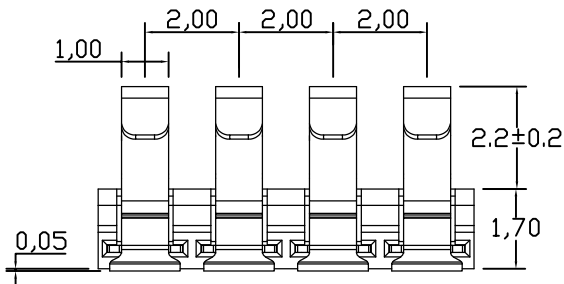


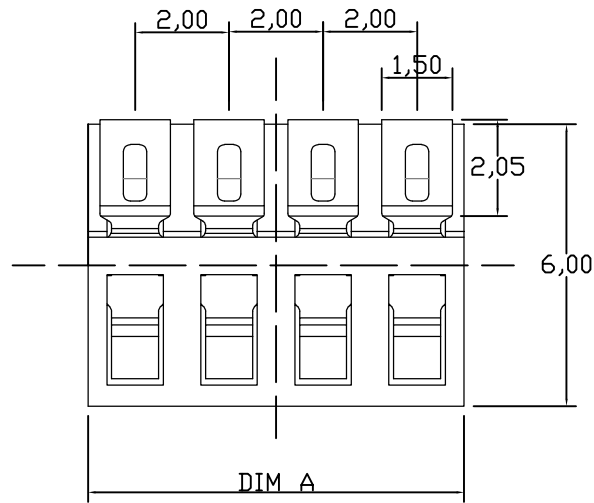

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX ± 0.05)

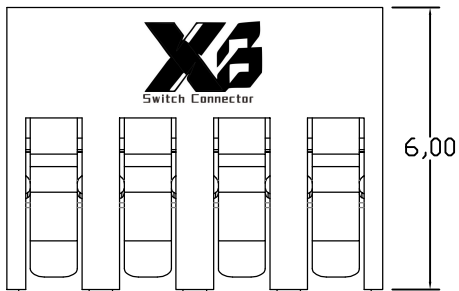

性能:

额定电流: 2.0A
额定电压: 12V
耐电压: 500V
接触电阻: 30mΩ
绝缘电阻: 500MΩ
工作温度: -40℃ ~ +85℃
塑件(材质): LCP
接触点(材质): 铜合金, 触点镀金10U",
使用寿命: 5000次以上

Pin数	PART NO.	DIM A
2Pin	XB-BC-12-2P170-08	4.0
3Pin	XB-BC-12-3P170-08	6.0
4Pin	XB-BC-12-4P170-08	8.0
5Pin	XB-BC-12-5P170-08	10.0
6Pin	XB-BC-12-6P170-08	12.0
7Pin	XB-BC-12-7P170-08	14.0
8Pin	XB-BC-12-8P170-08	16.0

版本REV. 更版标记REVISIONNOTE 日期DATE			未注公差 TOLERANCE	
			X. ±0.35	X. " ±4"
			X.X ±0.25	X.X' ±3'
			X.XX ±0.15	X.XX ±2'
			X.XXX ±0.05	X.XXX ±1'
视图方法 PROJECTION				
绘制DRAWN	高鹏		 东莞市溪榜电子有限公司 Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD	
设计DES'D	庞东			
审核CHK'D	贺龙飞			
批准APPV'D	杨军			
比例SCALE: 3: 1			单位UNIT: mm	
			页码SHEET: 共1页 第1页	

品名ARTICLE: **弹片电池座连接器**
Bullet Batteryholderconnector

图号MODEL: XB-BC-12-NP触点加高0.8mm A4