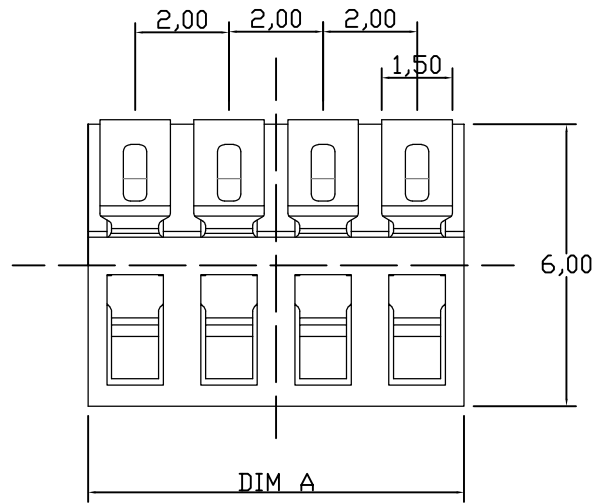


性能:

额定电流: 2.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ



绝缘电阻: 500MΩ

工作温度: -40℃~+85℃

塑件(材质): LCP

接触点(材质): 磷铜, 触点镀金3U",


使用寿命: 5000次以上

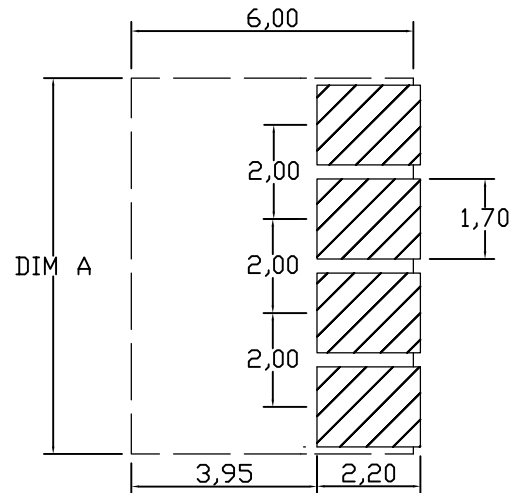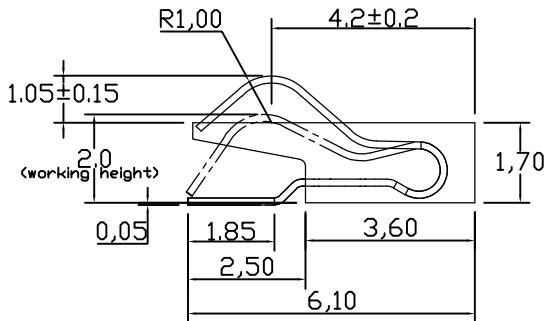

RECOMMENDED PCB LAYOUT

TOP VIEW (.XX±0.05)

Pin数	PART NO.	DIM A
2Pin	XB-BC-12-2P170-R1.0	4.0
3Pin	XB-BC-12-3P170-R1.0	6.0
4Pin	XB-BC-12-4P170-R1.0	8.0
5Pin	XB-BC-12-5P170-R1.0	10.0
6Pin	XB-BC-12-6P170-R1.0	12.0
7Pin	XB-BC-12-7P170-R1.0	14.0
8Pin	XB-BC-12-8P170-R1.0	16.0

版本REV.	更新标记REVISION	NOTE	日期DATE	未注公差 TOLERANCE		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
				X. ±0.35	X. ° ±4°	
				X.X ±0.25	X.X' ±3'	
绘制DRAWN	高鹏			X.XX ±0.15	X.XX ±2'	品名ARTTCL: 弹片电池座连接器 Bullet Batteryholderconnector
				X.XXX ±0.05	X.XXX ±1'	
设计DES' D	庞东	视图方法 PROJECTION				
审核CHK' D	贺龙飞			图号MODEL: XB-BC-12系列低R		A4
批准APPV' D	杨军	比例SCALE: 3: 1		单位UNIT: mm		
				页码SHEET: 共1页 第1页		

X3 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

品名ARTICLE: **弹片电池座连接器**

Bullet Batteryholderconnector

图号MODEL: XB-BC-12系列低R A4