
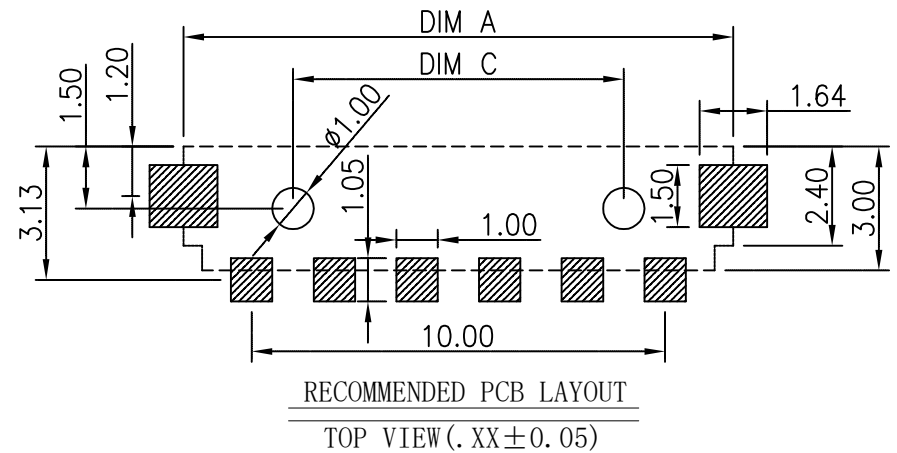


性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ MAX
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP E130I黑色
- 接触点(材质): 磷青铜C5210, 触点镀金3U"

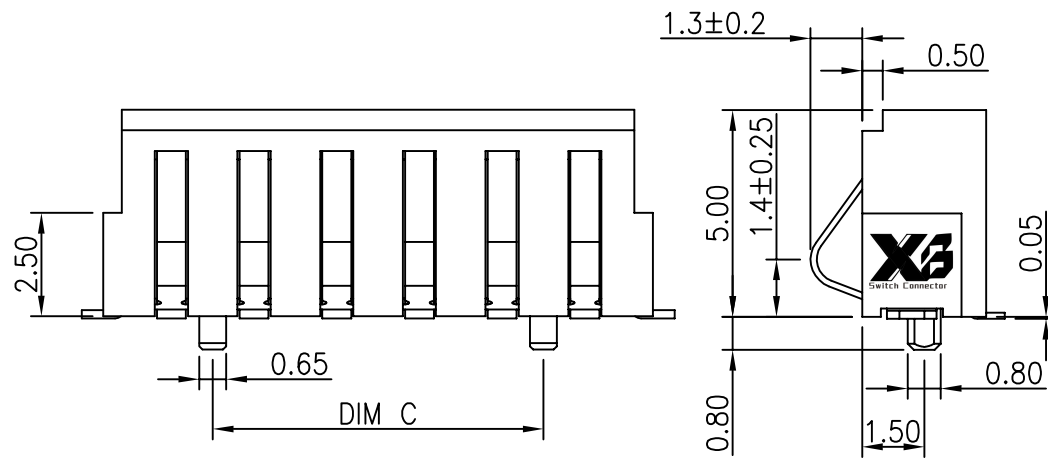

Pin数	PART NO.	DIM A	DIM B	DIM C
2Pin	XB-BC-26-2P500	5.3	4.4	/
3Pin	XB-BC-26-3PD500	7.3	6.4	
4Pin	XB-BC-26-4PD500	9.3	8.4	
5Pin	XB-BC-26-5PD500	11.3	10.4	
6Pin	XB-BC-26-6PD500	13.3	12.4	

版本REV.	更新标记	REVISION	NOTE	日期DATE	未注公差	TOOLERANCE
					X.	±0.35
					X.X	±0.25
					X.XX	±0.15
					X.XXX	±0.05
绘制DRAWN	高鹏					
设计DES'D	庞东					
审核CHK'D	贺龙飞					
批准APPV'D	杨军					

东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

品名ARTICLE:
弹片电池座连接器
Bullet Batteryholderconnector

图号MODEL:
XB-BC-26-5.0H

A4

比例SCALE: 单位UNIT: mm 页码SHEET: 共1页 第1页