
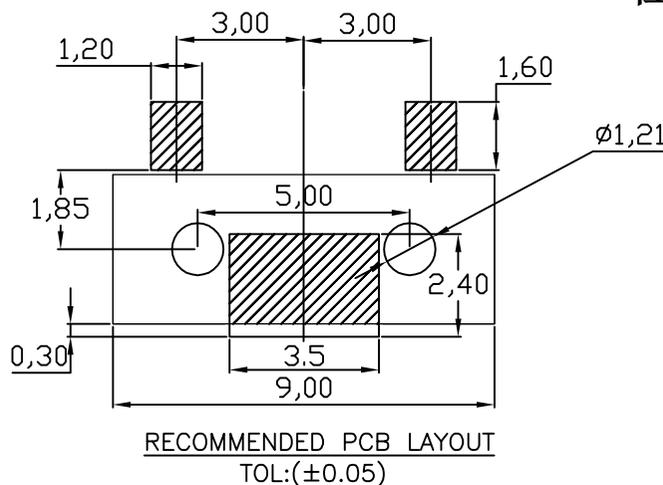
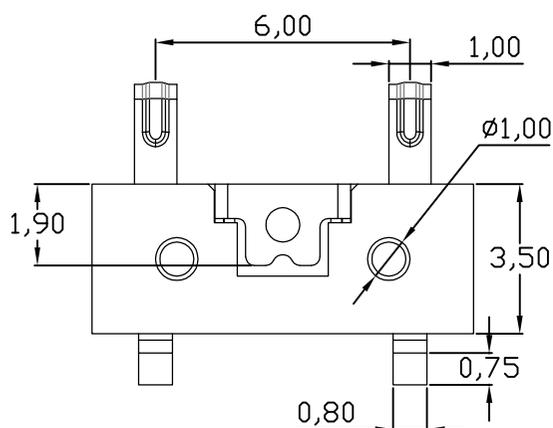
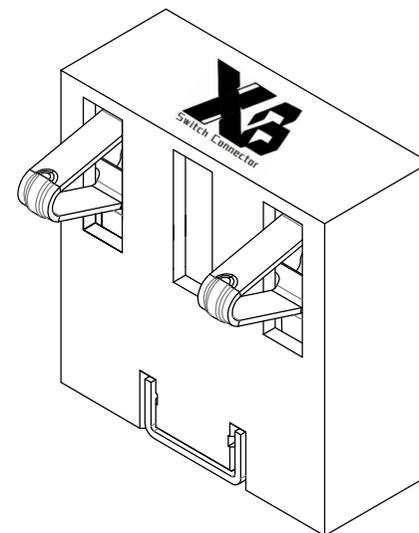


# ROHS

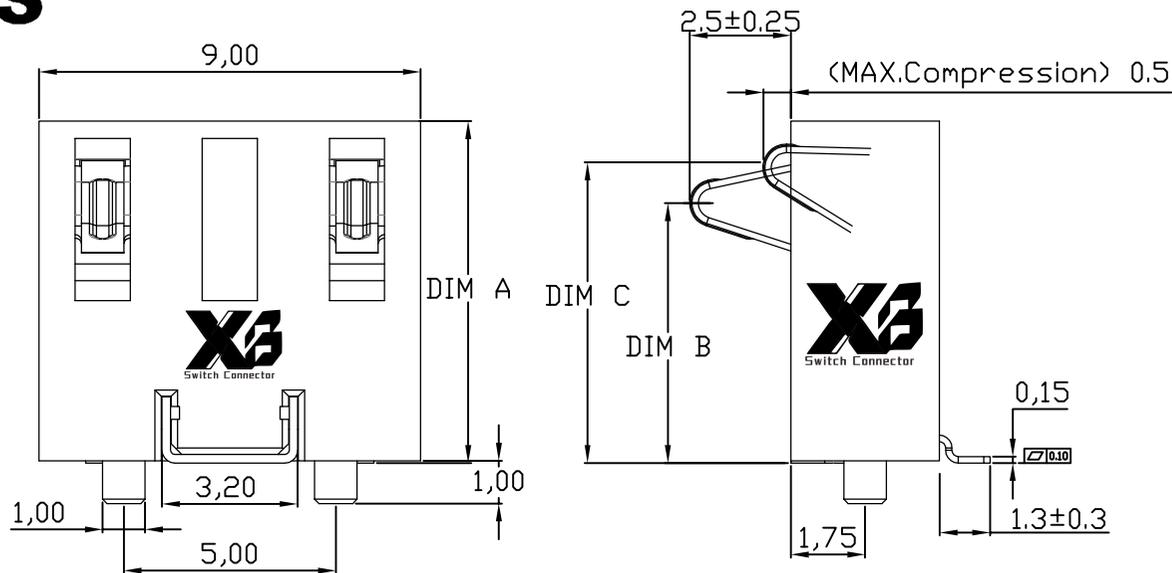

### 性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP
- 接触点(材质): 磷铜, 镀金3U"

规格型号	DIM A	DIM B	DIM C
XB-BC-30-3PD800-2P	8.0±0.15	5.9±0.3	6.9±0.3
XB-BC-30-3PD900-2P	9.0±0.15	6.9±0.3	7.9±0.3
XB-BC-30-3PD100-2P	10.0±0.15	7.9±0.3	8.9±0.3

版本REV.	更改标记REVISIONNOTE	日期DATE	未注公差 TOLERANCE	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD Switch Connector
			X. ±0.35 X.* ±4°	
			X.X ±0.25 X.X* ±2°	
			X.XX ±0.15 X.XX ±0.5° X.XXX ±0.05 X.XXX ±0.05°	
绘制DRAWN	高鹏		视图方法 PROJECTION	品名ARTICLE: <b>弹片电池座连接器</b>
设计DES'D	庞东			<b>Bullet Batteryholderconnector</b>
审核CHK'D	贺龙飞			图号MODEL: XB-BC-30-3PD-2P
批准APPV'D	杨军		比例SCALE:	单位UNIT: mm
				页码SHEET: 共1页 第1页