
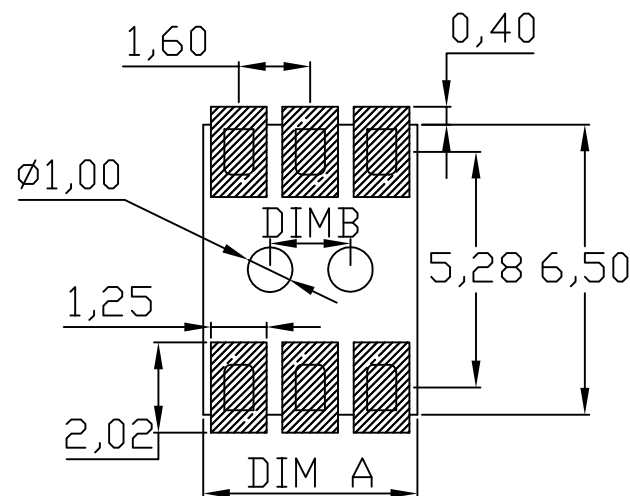
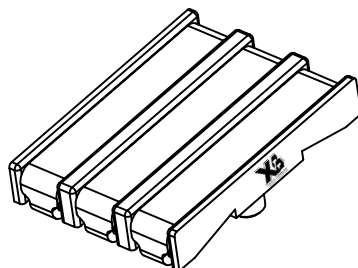
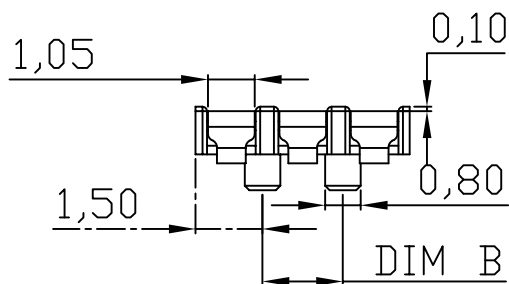
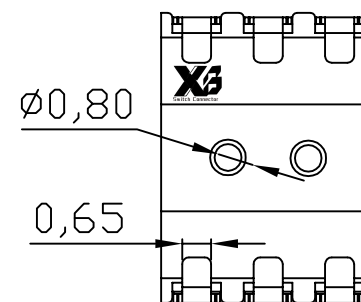
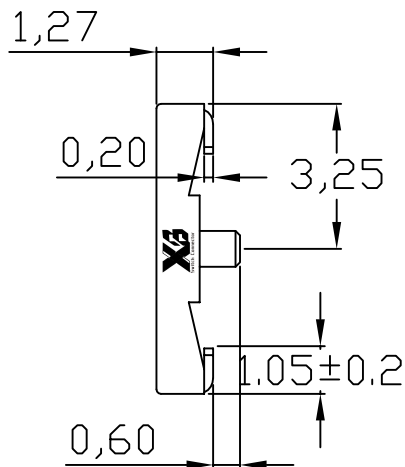


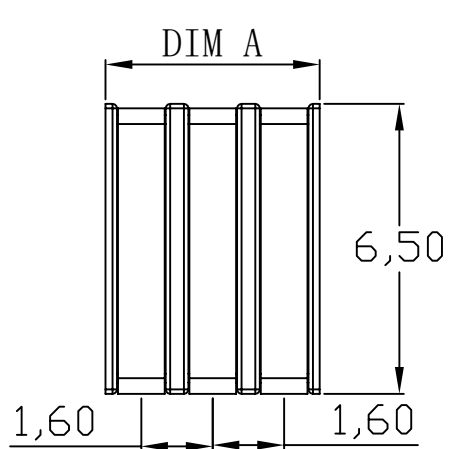

RECOMMENDED PCB LAYOUT
TOP VIEW (. XX ± 0.05)

弹片电池连接器性能:

额定电流: 3.0A

额定电压: 12V

耐电压: 500V

接触电阻: 30mΩ

绝缘电阻: 500MΩ


工作温度: -45℃~+85℃

使用寿命: 5000次以上

塑件(材质): PA9T黑色

接触点(材质): 黄铜C2680, 镀金3U

规格	DIM A	DIM B
XB-BC-17-3PD127	4.8	1.8
XB-BC-17-4PD127	6.4	3.4
XB-BC-17-5PD127	8.0	5.0
XB-BC-17-6PD127	9.6	6.6
XB-BC-17-7PD127	11.2	8.2
XB-BC-17-8PD127	12.8	9.8
XB-BC-17-9PD127	14.4	11.4
XB-BC-17-10PD127	16.0	13.0

版本REV.	更新标记REVISIONNOTE	日期DATE	未注公差 TOLERANCE	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD	
			X. ±0.35		
			X.X ±0.25		
			X.XX ±0.15		
绘制DRAWN	高鹏		X.XXX ±0.05	品名ARTICLE: 弹片电池座连接器 Bullet Batteryholderconnector	
设计DES'D	庞东		视图方法 PROJECTION		
审核CHK'D	贺龙飞			图号MODEL: XB-BC-17系列母座	A4
批准APPV'D	杨军		比例SCALE:	单位UNIT: mm	页码SHEET: 共1页 第1页