

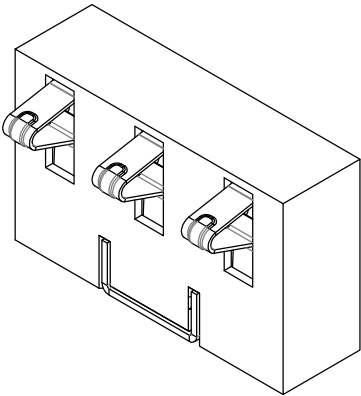
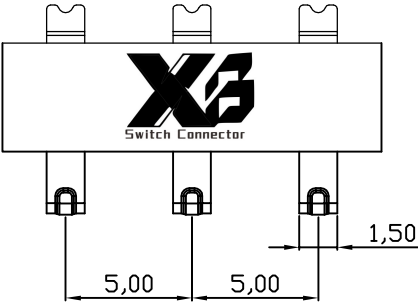
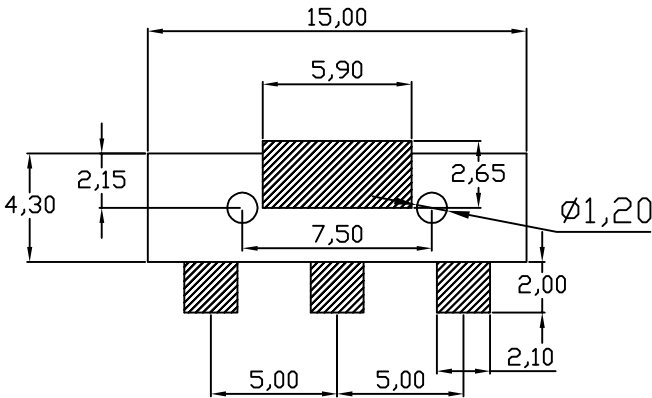


ROHS

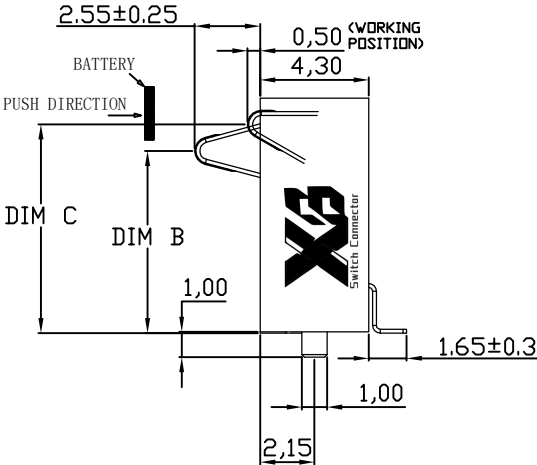


性能:

- 额定电流: 3.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ MAX
- 绝缘电阻: 500MΩ
- 工作温度: -40℃~+85℃
- 塑件(材质): LCP黑色
- 接触点(材质): 铜合金, 触点镀金3U"

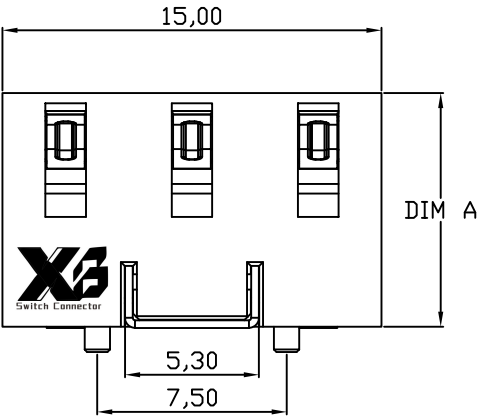

RECOMMENDED PCB LAYOUT
TOP VIEW(.XX±0.05)

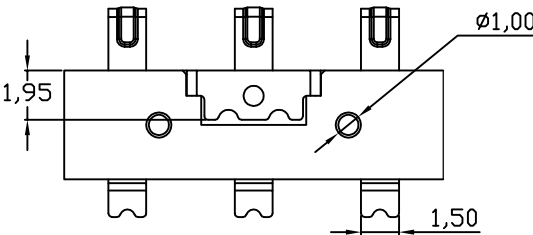

规格型号	DIM A	DIM B	DIM C
XB-BC-19-3PD800	8.00	5.70±0.3	6.85±0.3
XB-BC-19-3PD925	9.25	6.95±0.3	8.10±0.3
XB-BC-19-3PD1050	10.50	8.20±0.3	9.35±0.3

版本REV.	更版标记REVISION	NOTE	日期DATE	未注公差 TOLERANCE
X.	±0.35			
X.X	±0.25			
X.XX	±0.15			
X.XXX	±0.05			
绘制DRAWN	高鹏			
设计DES'D	庞东			
审核CHK'D	贺龙飞			
批准APPV'D	杨军			

东莞市溪榜电子有限公司	
DONG GUAN XI BANG ELECTRONICS CO., LTD	
品名ARTICLE: 弹片电池座连接器	
Bullet Batteryholderconnector	
图号MODEL: XB-BC-19-3PD	A4