
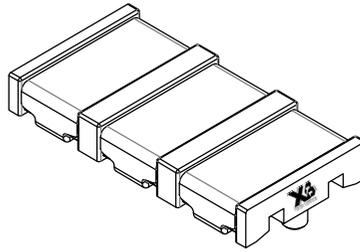


ROHS



性能:

额定电流: 5.0A

额定电压: 30V

耐电压: 500V

接触电阻: 30mΩ max





绝缘电阻: 500MΩ

工作温度: -55℃~+125℃

使用寿命: 5000次以上

塑件(材质): PA9T黑色, 耐高温260℃

接触点(材质): 黄铜C2680, 触点镀金3U"

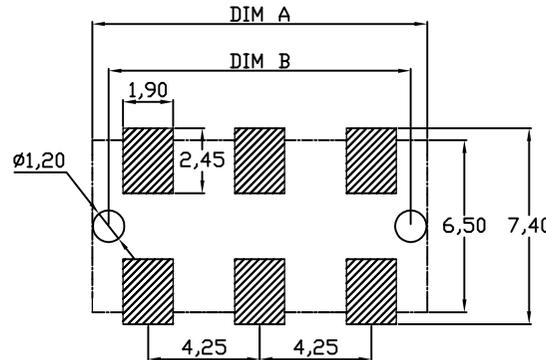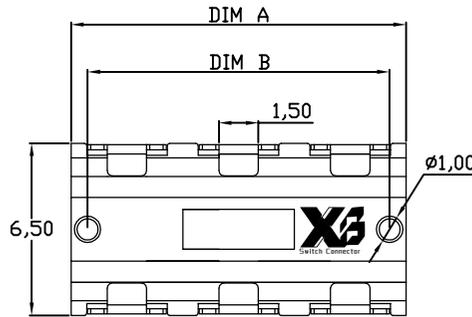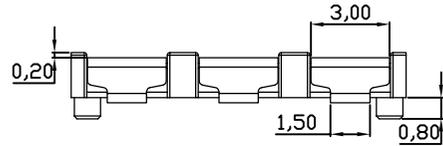

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX ± 0.05)

规格型号	DIM A	DIM B
XB-BC-40-2PD190	8.50	7.25
XB-BC-40-3PD190	12.75	11.5
XB-BC-40-4PD190	17.00	15.75
XB-BC-40-5PD190	21.25	20.00
XB-BC-40-6PD190	25.5	24.25

版本REV.	更新标记REVISIONNOTE	日期DATE	未注公差 TOLERANCE
			X. ±0.35
			X.X ±0.25
			X.XX ±0.15
			X.XXX ±0.05
绘制DRAWN	高鹏		视图方法 PROJECTION
设计DES'D	庞东		
审核CHK'D	贺龙飞		
批准APPV'D	杨军		比例SCALE:

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

品名ARTICLE: **弹片电池座连接器**
Bullet Batteryholderconnector

图号MODEL: XB-BC-40系列有柱 A4