

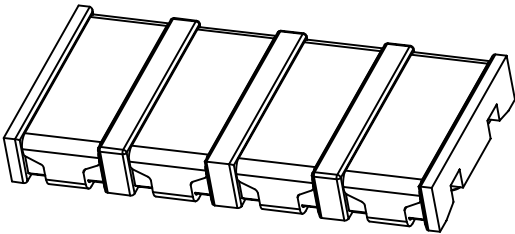
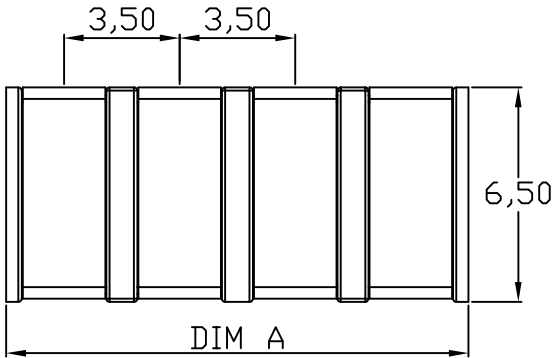
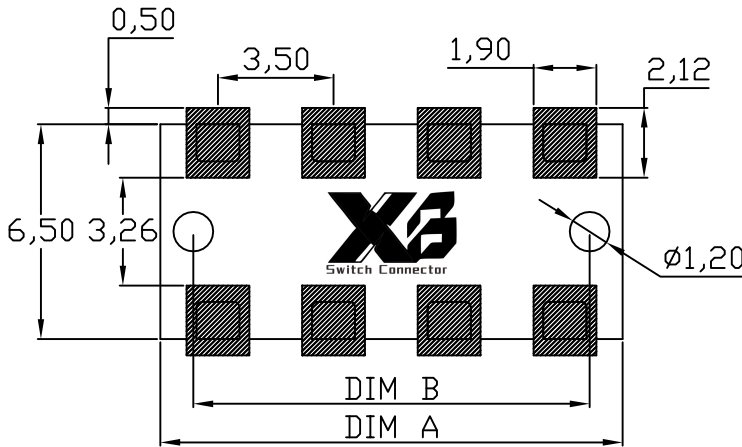


ROHS

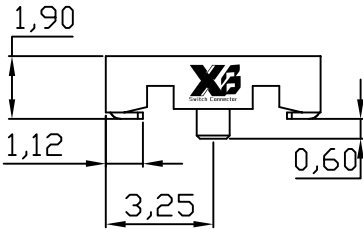


性能:

额定电流: 5.0A
额定电压: 30V
耐电压: 500V
接触电阻: 30mΩ MAX
绝缘电阻: 500MΩ
工作温度: -55℃~+125℃
使用寿命: 10000次以上
塑件(材质): LCP黑色
接触点(材质): 黄铜C2680, 接触面镀金3U"

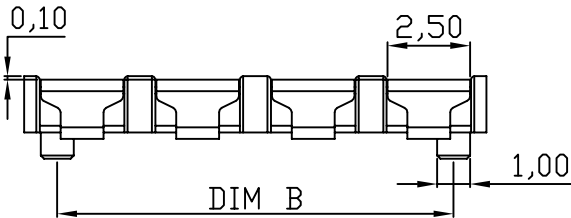

RECOMMENDED PCB LAYOUT
TOP VIEW (.XX±0.05)

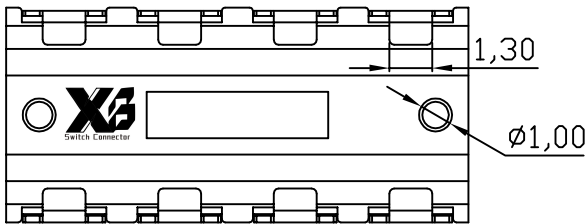

规格型号	DIM A	DIM B
XB-BC-92-2PD190	7.0	5.0
XB-BC-92-3PD190	10.5	8.5
XB-BC-92-4PD190	14.0	12.0
XB-BC-92-5PD190	17.5	15.5
XB-BC-92-6PD190	21.0	19.0
XB-BC-92-7PD190	24.5	22.5
XB-BC-92-8PD190	28.0	26.0

版本REV.		更新标记REVISION		NOTE	日期DATE	未注公差 TOLERANCE		X3 Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
						X.	±0.35				
						X.X	±0.25				
绘制DRAWN		高鹏				X.XX	±0.15	品名ARTICLE: 弹片电池座连接器 Bullet Batteryholderconnector			
设计DES' D		庞东				X.XXX	±0.05				
审核CHK' D		贺龙飞				视图方法 PROJECTION		图号MODEL: XB-BC-92系列母座 A4			
批准APPV' D		杨军				比例SCALE:					单位UNIT: mm
								页码SHEET: 共1页 第1页			