

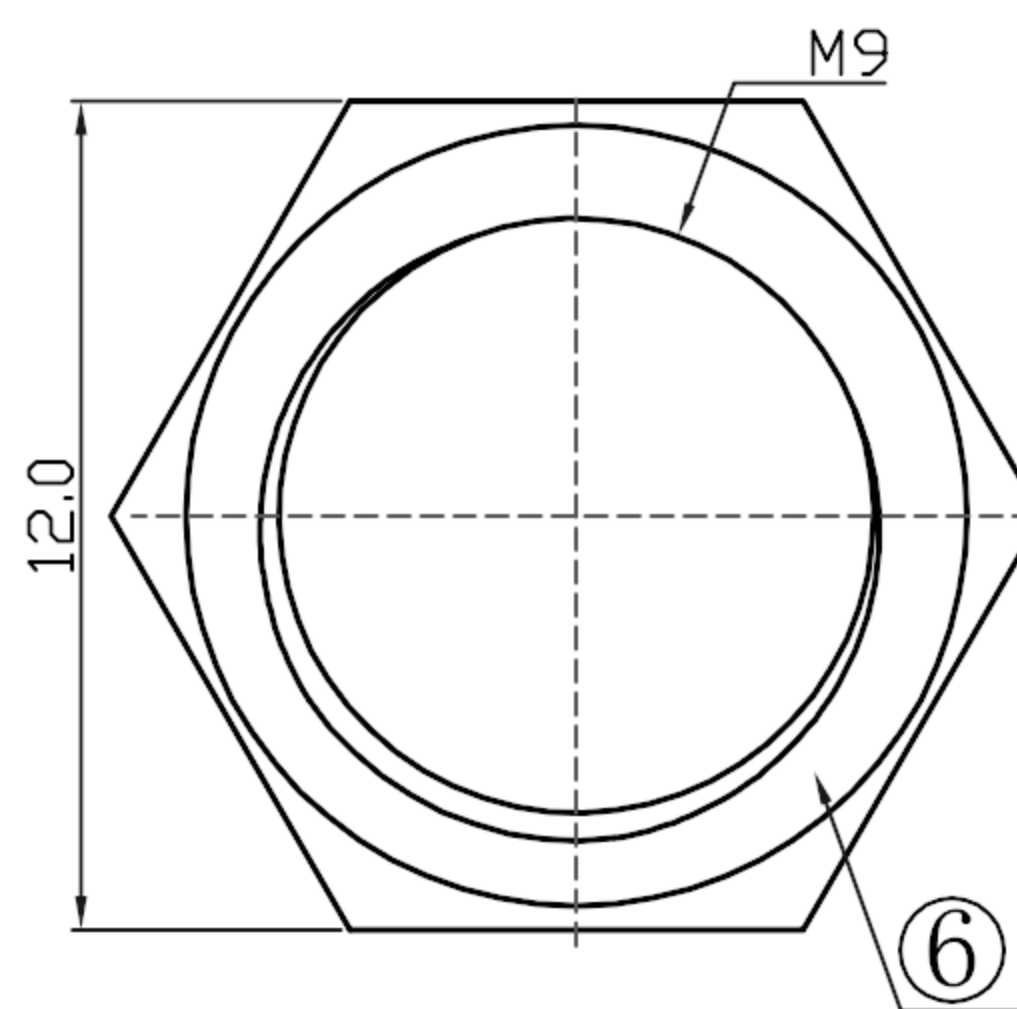
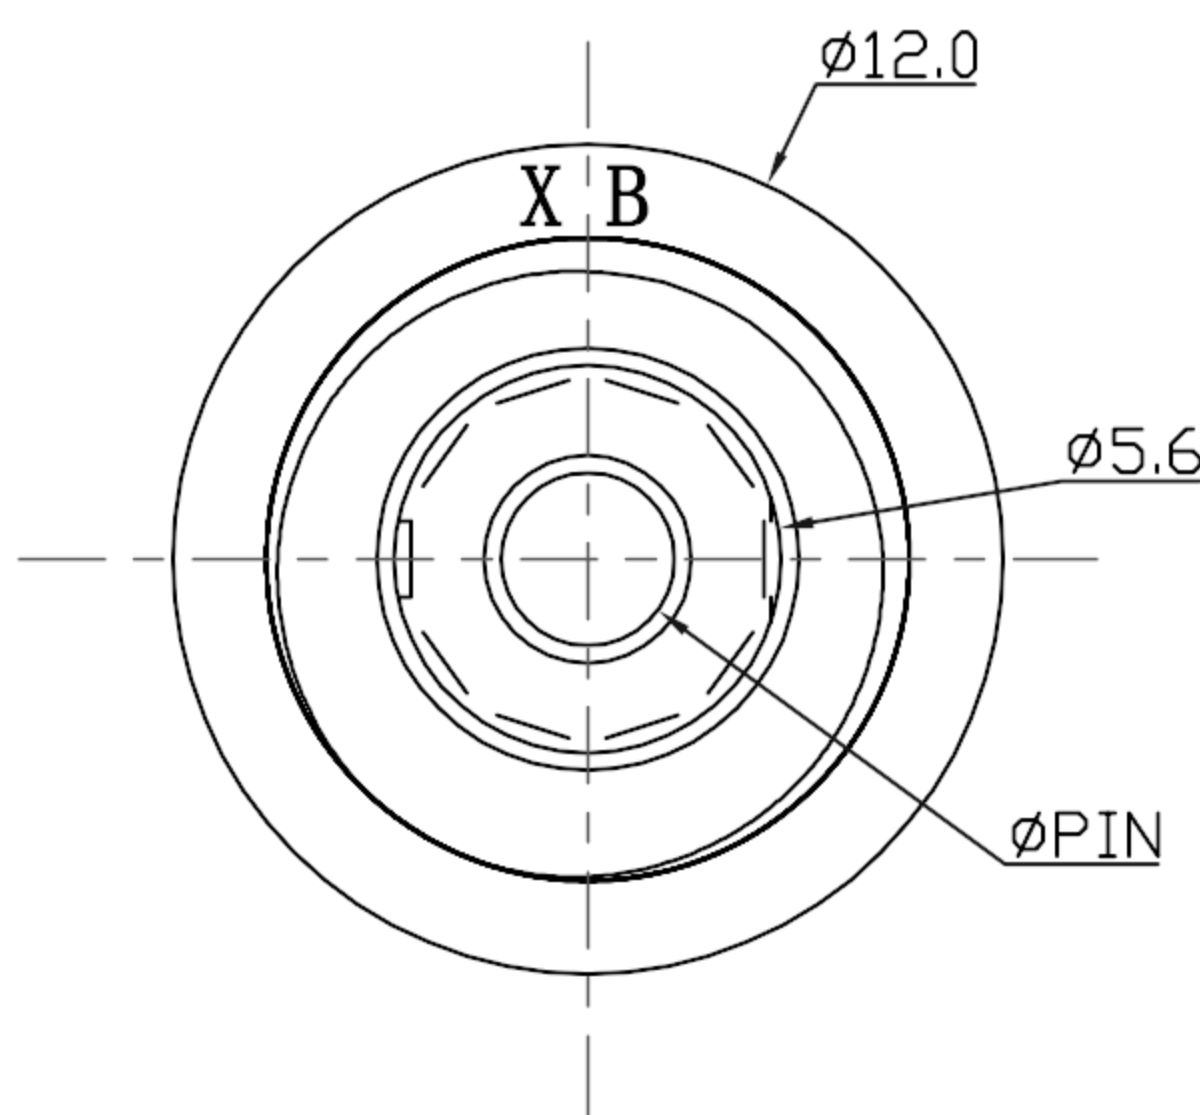
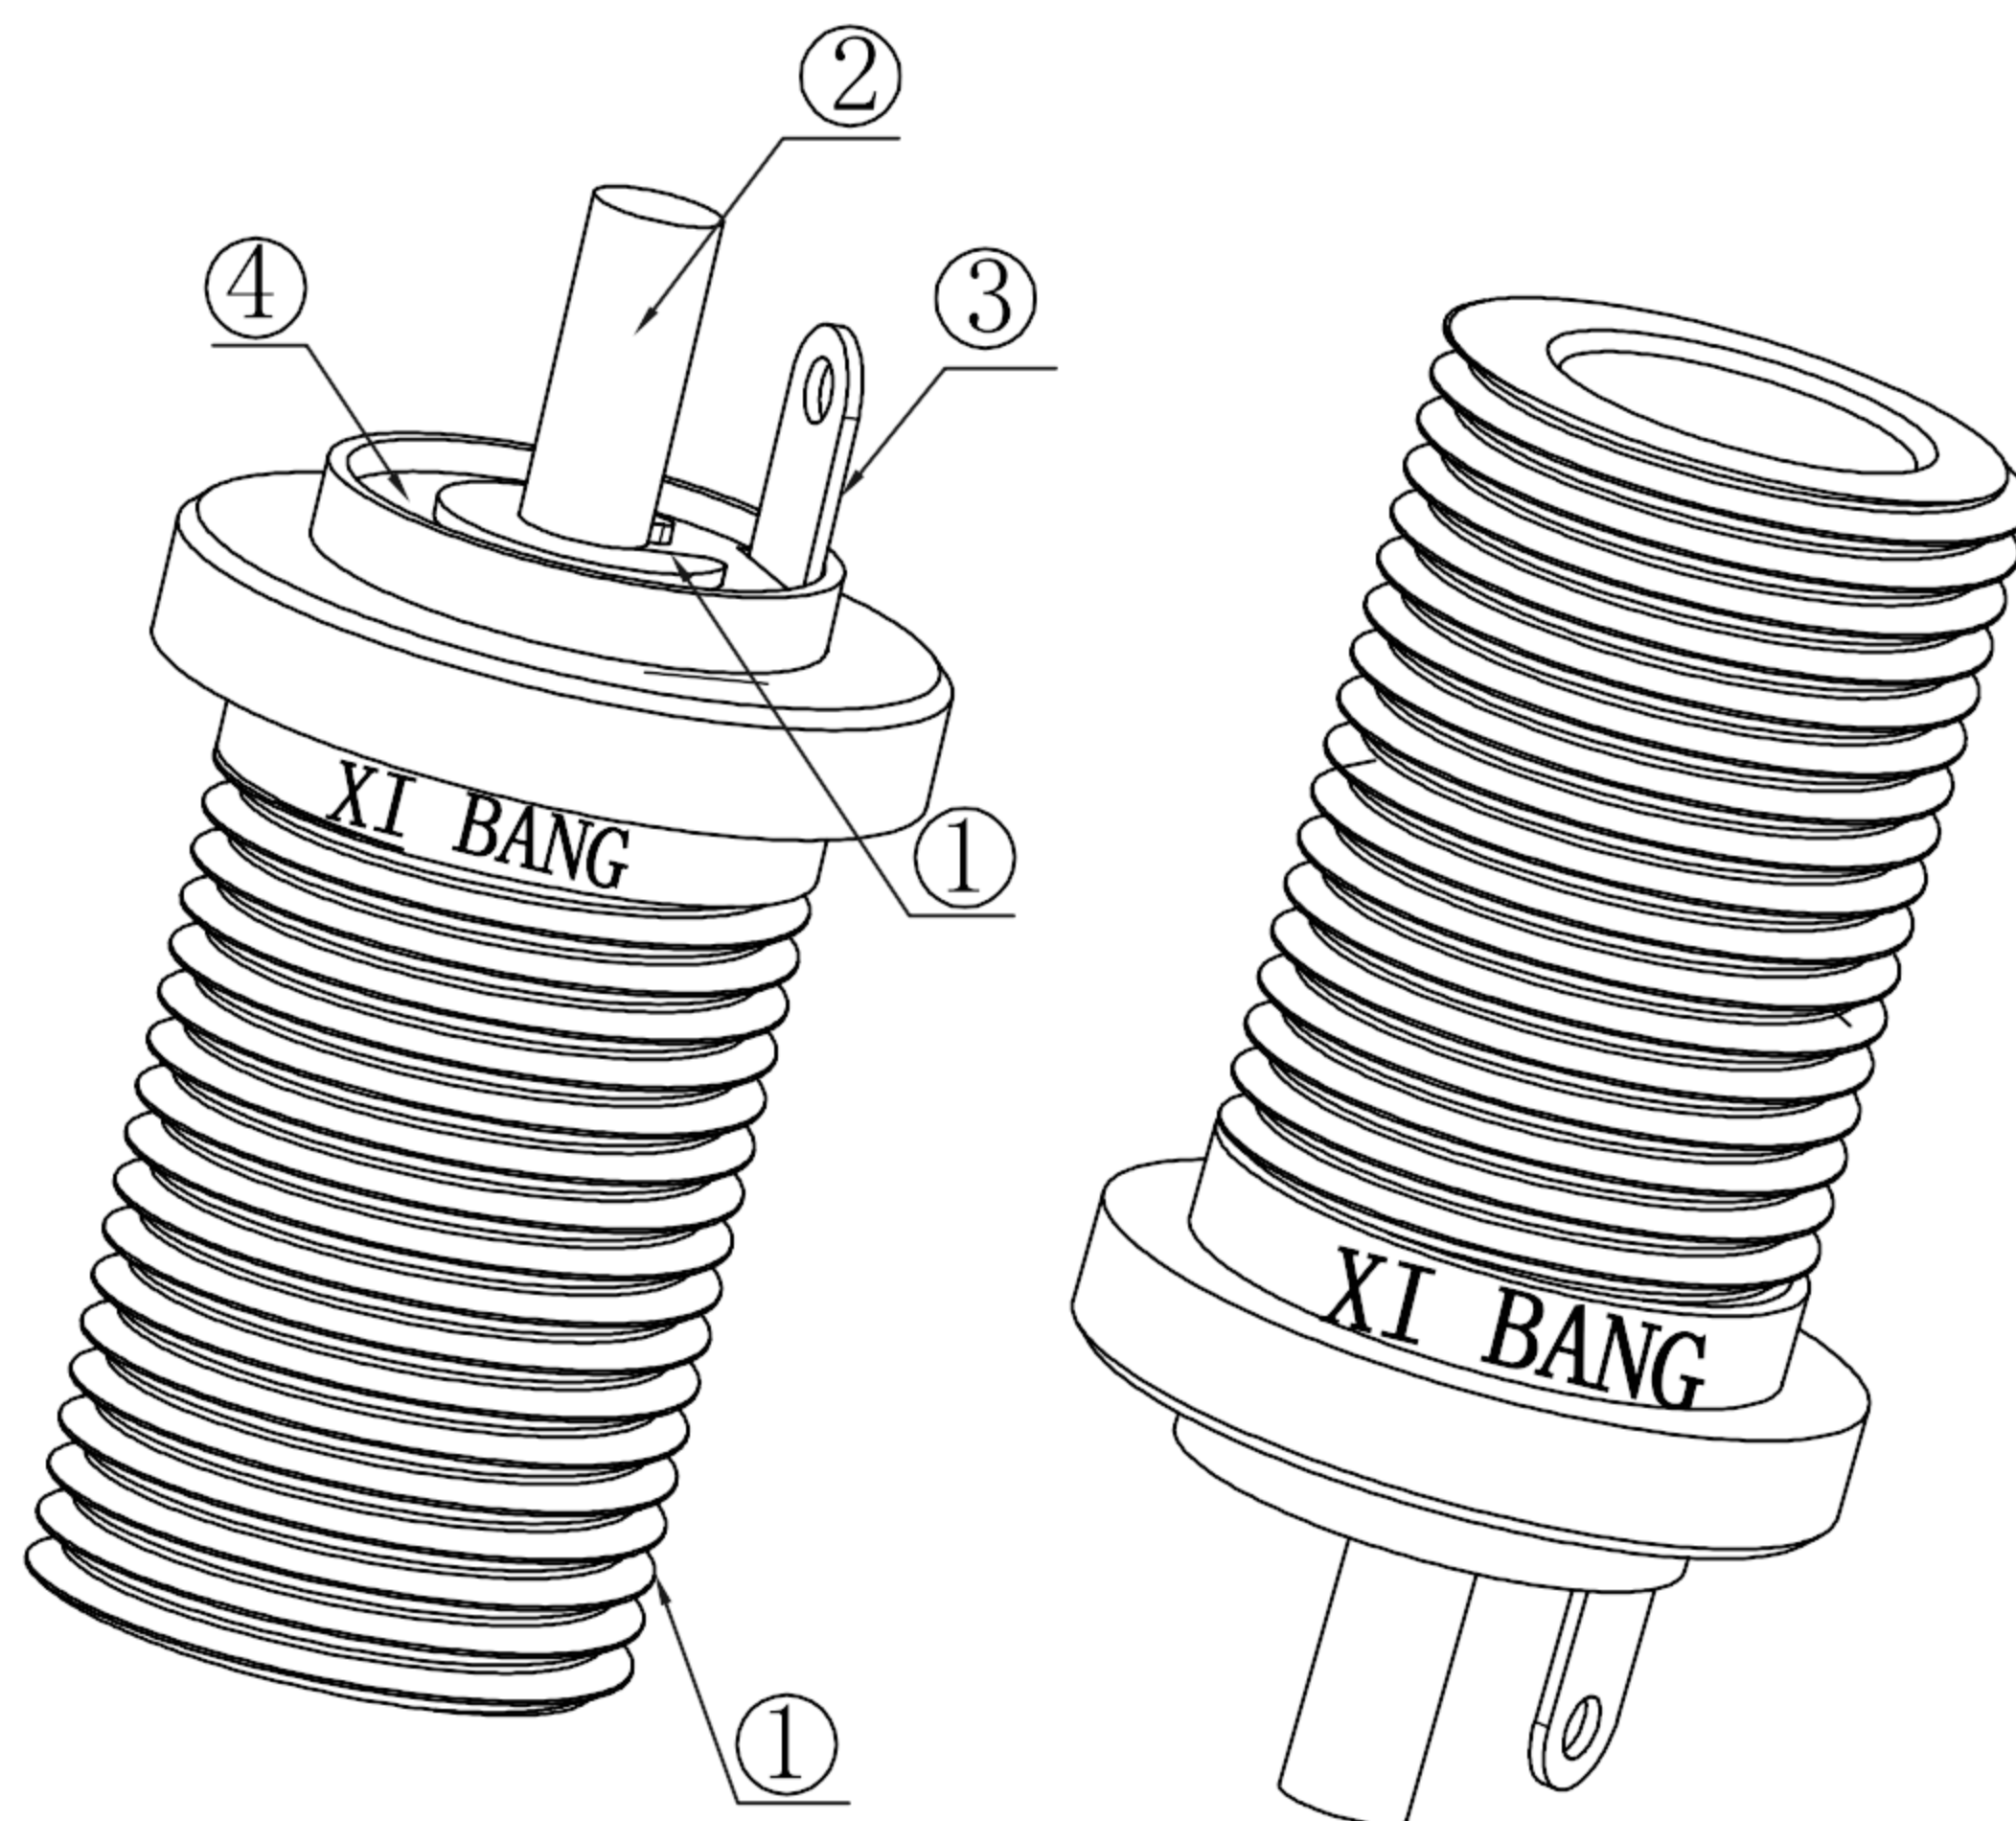


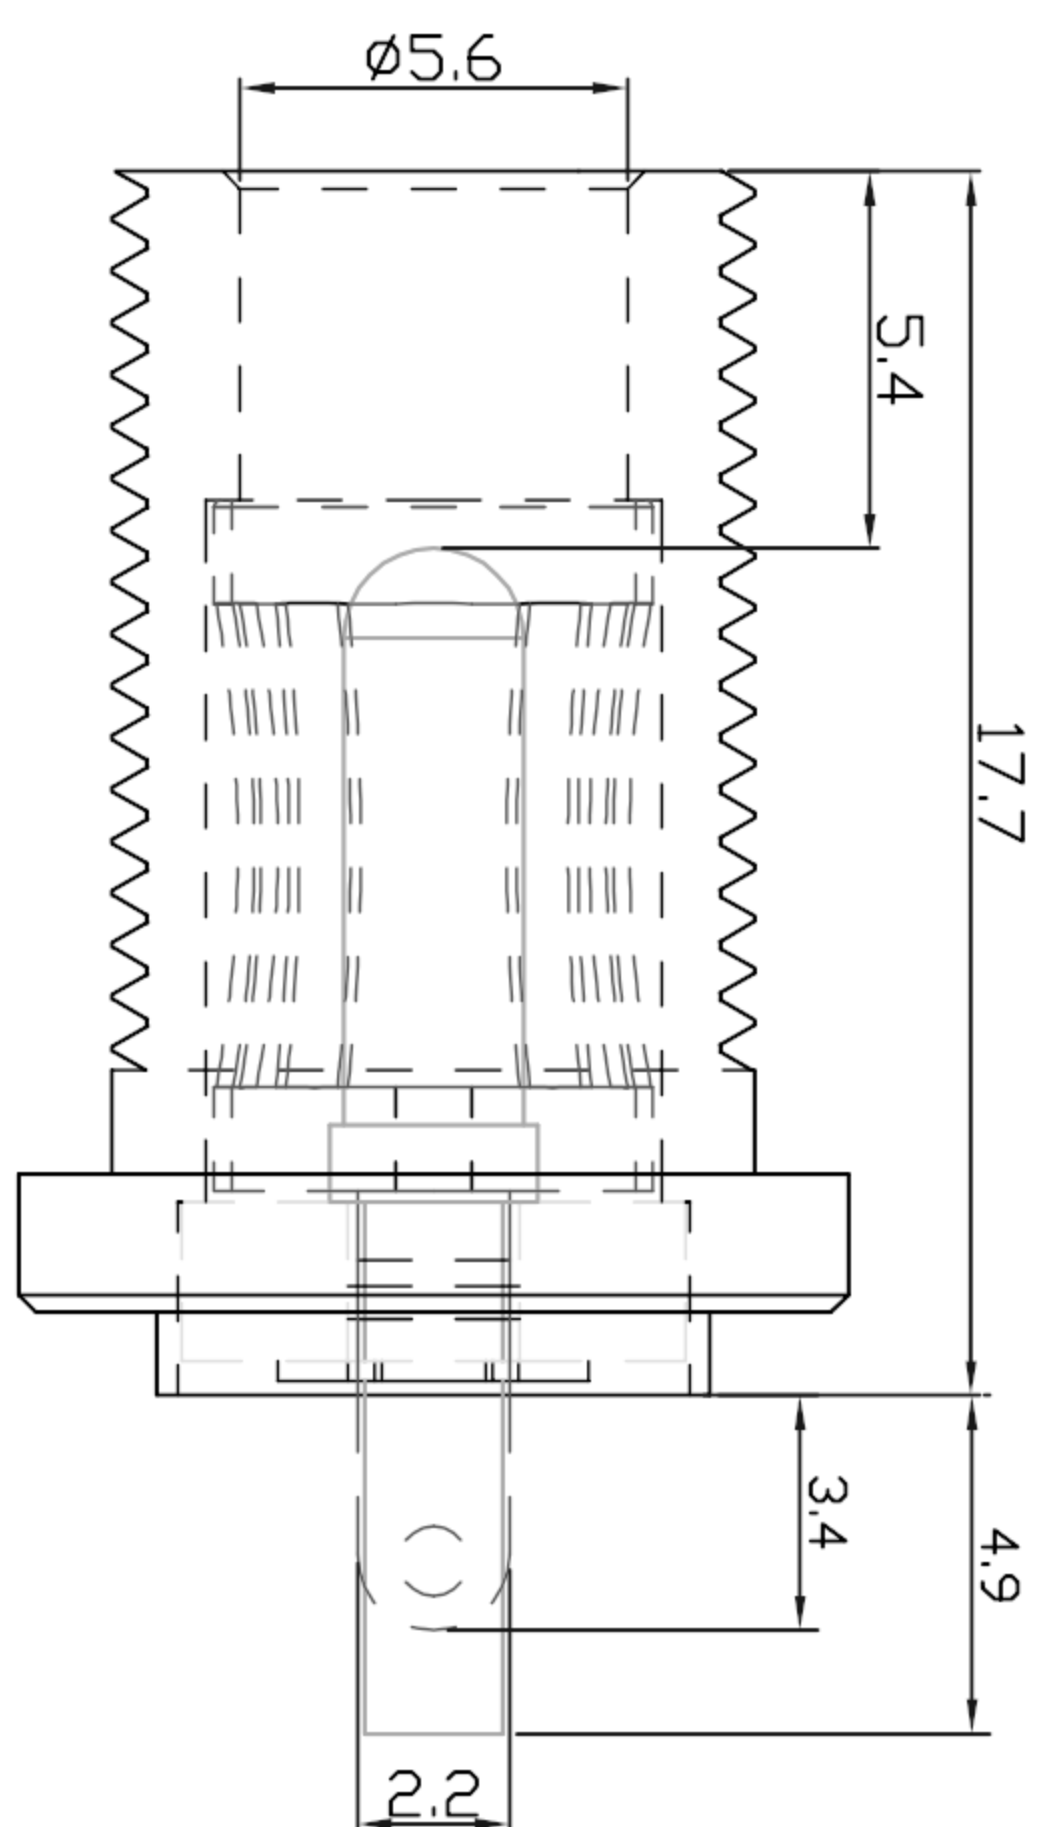

PIN	$\phi 2.1$	$\phi 2.5$
APPD		

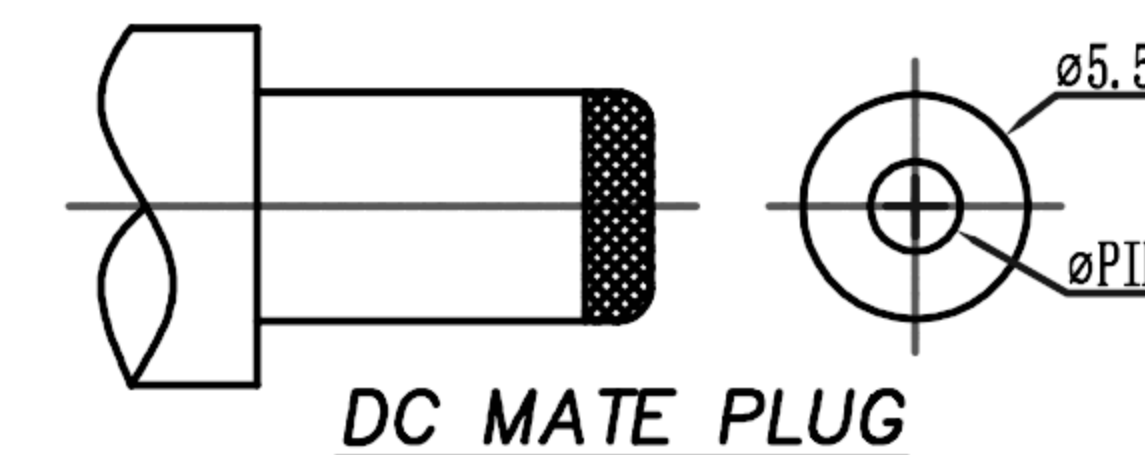

- 1.Rating : DC 12V 30V , 5. 0A 7. 0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles


6	XB-DC-1217-6	螺帽	1PCS	H59-3黄铜	铜锡	环保
5	XB-DC-1217-5	卡簧	1PCS	不锈钢	原色	环保
4	XB-DC-1217-4	陶瓷	1PCS	陶瓷	白色	环保
3	XB-DC-1217-3	弹片	1PCS	C5191磷铜	铜锡	环保
2	XB-DC-1217-2	PIN	1PCS	H62铜棒	铜锡	环保
1	XB-DC-1217-1	铜套	1PCS	H59-3黄铜	铜锡	环保
序号	零件图代号	名 称	数量	材 料	镀层/颜色	备 注



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB DC Power Jack


MODEL : XB-DC-1217

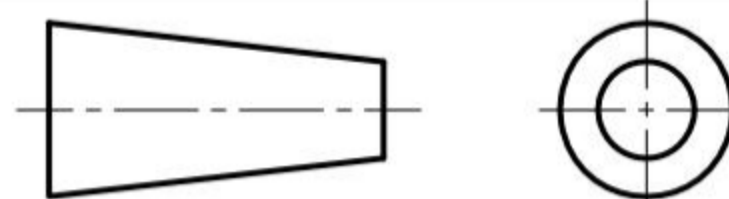

TOLERANCE	
$\leq 1.5\text{mm}$	± 0.1
$> 1.5\text{mm}$	± 0.2
$\geq 10.0\text{mm}$	± 0.3

ANGLE TOL
 $\pm 2^\circ$

6	PIN	BRASS	1	Ni PLATED
5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED
3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED
2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED
1	HOUSING	PBT UL94-V0	1	BLACK
NO.	PART NAME	MATERIAL	QTY.	FINISHING

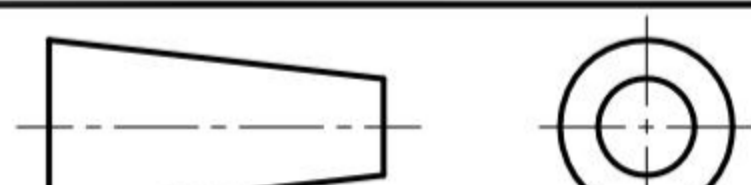		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD											
							TITLE : XB DC Power Jack MODEL : XB-DC-1217						
							5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED		
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED	
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED	
VERSION 01		APPD.	FEI. LONG. HE	DATE				2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED	
								1	HOUSING	PBT UL94-V0	1	BLACK	
								NO.	PART NAME	MATERIAL	QTY.	FINISHING	