

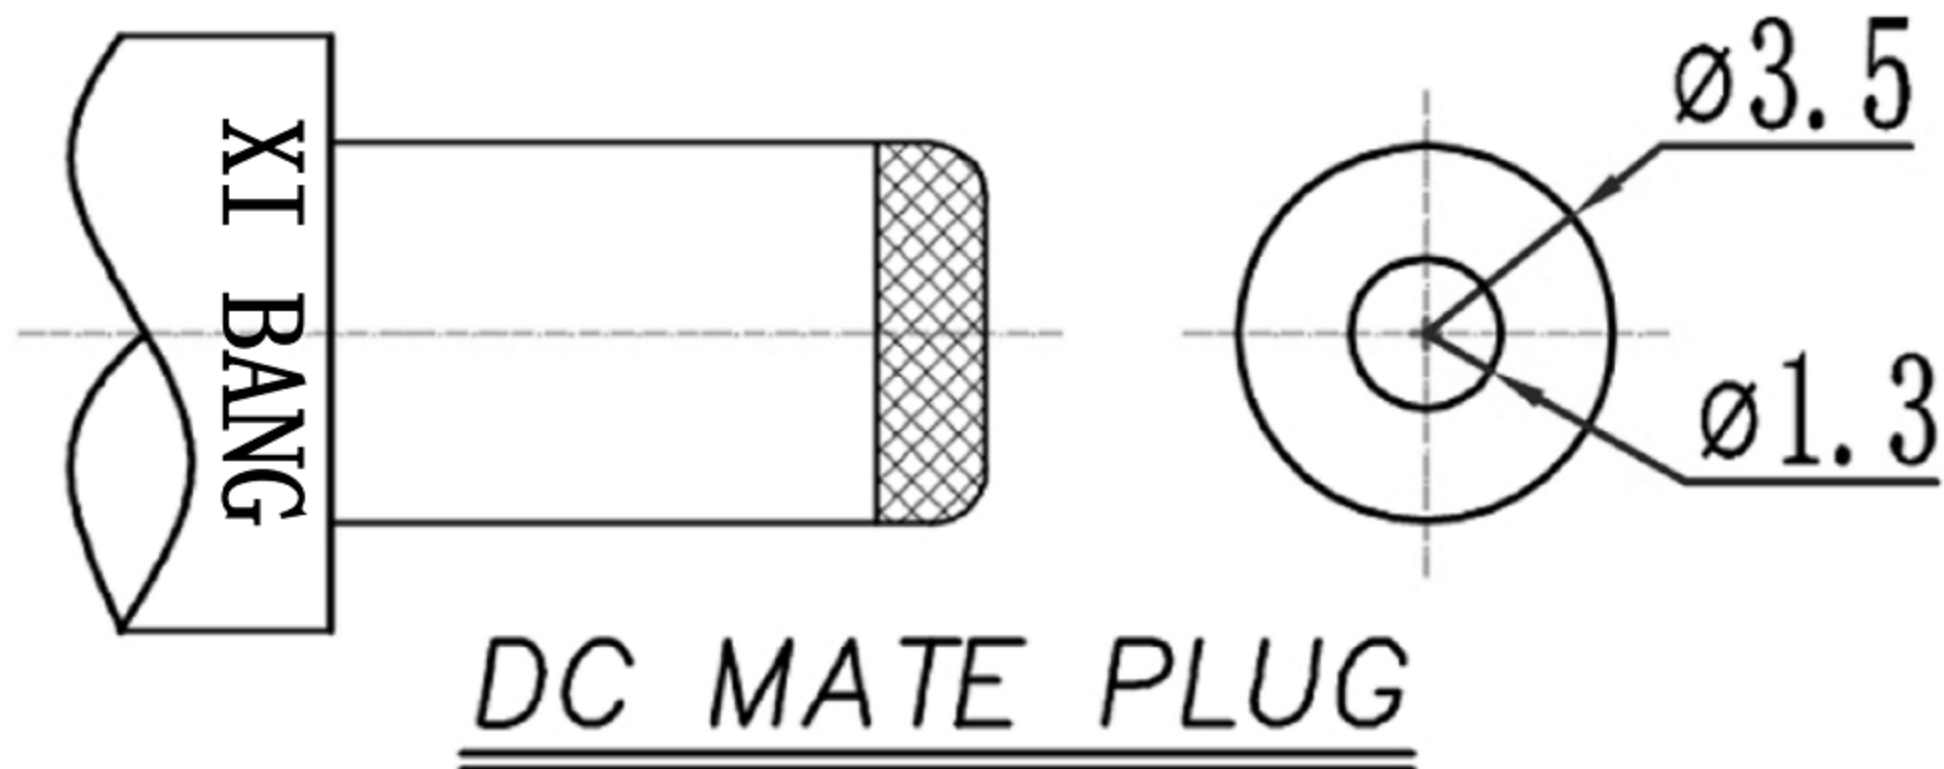
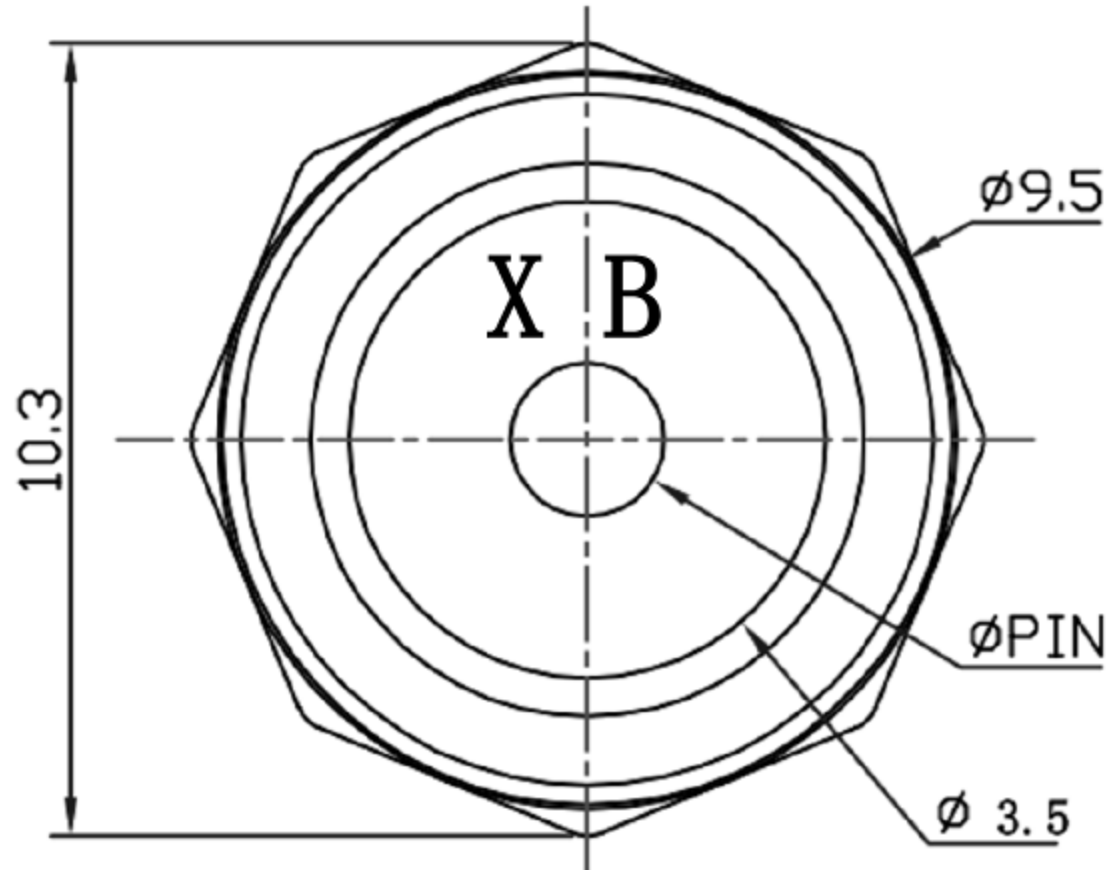
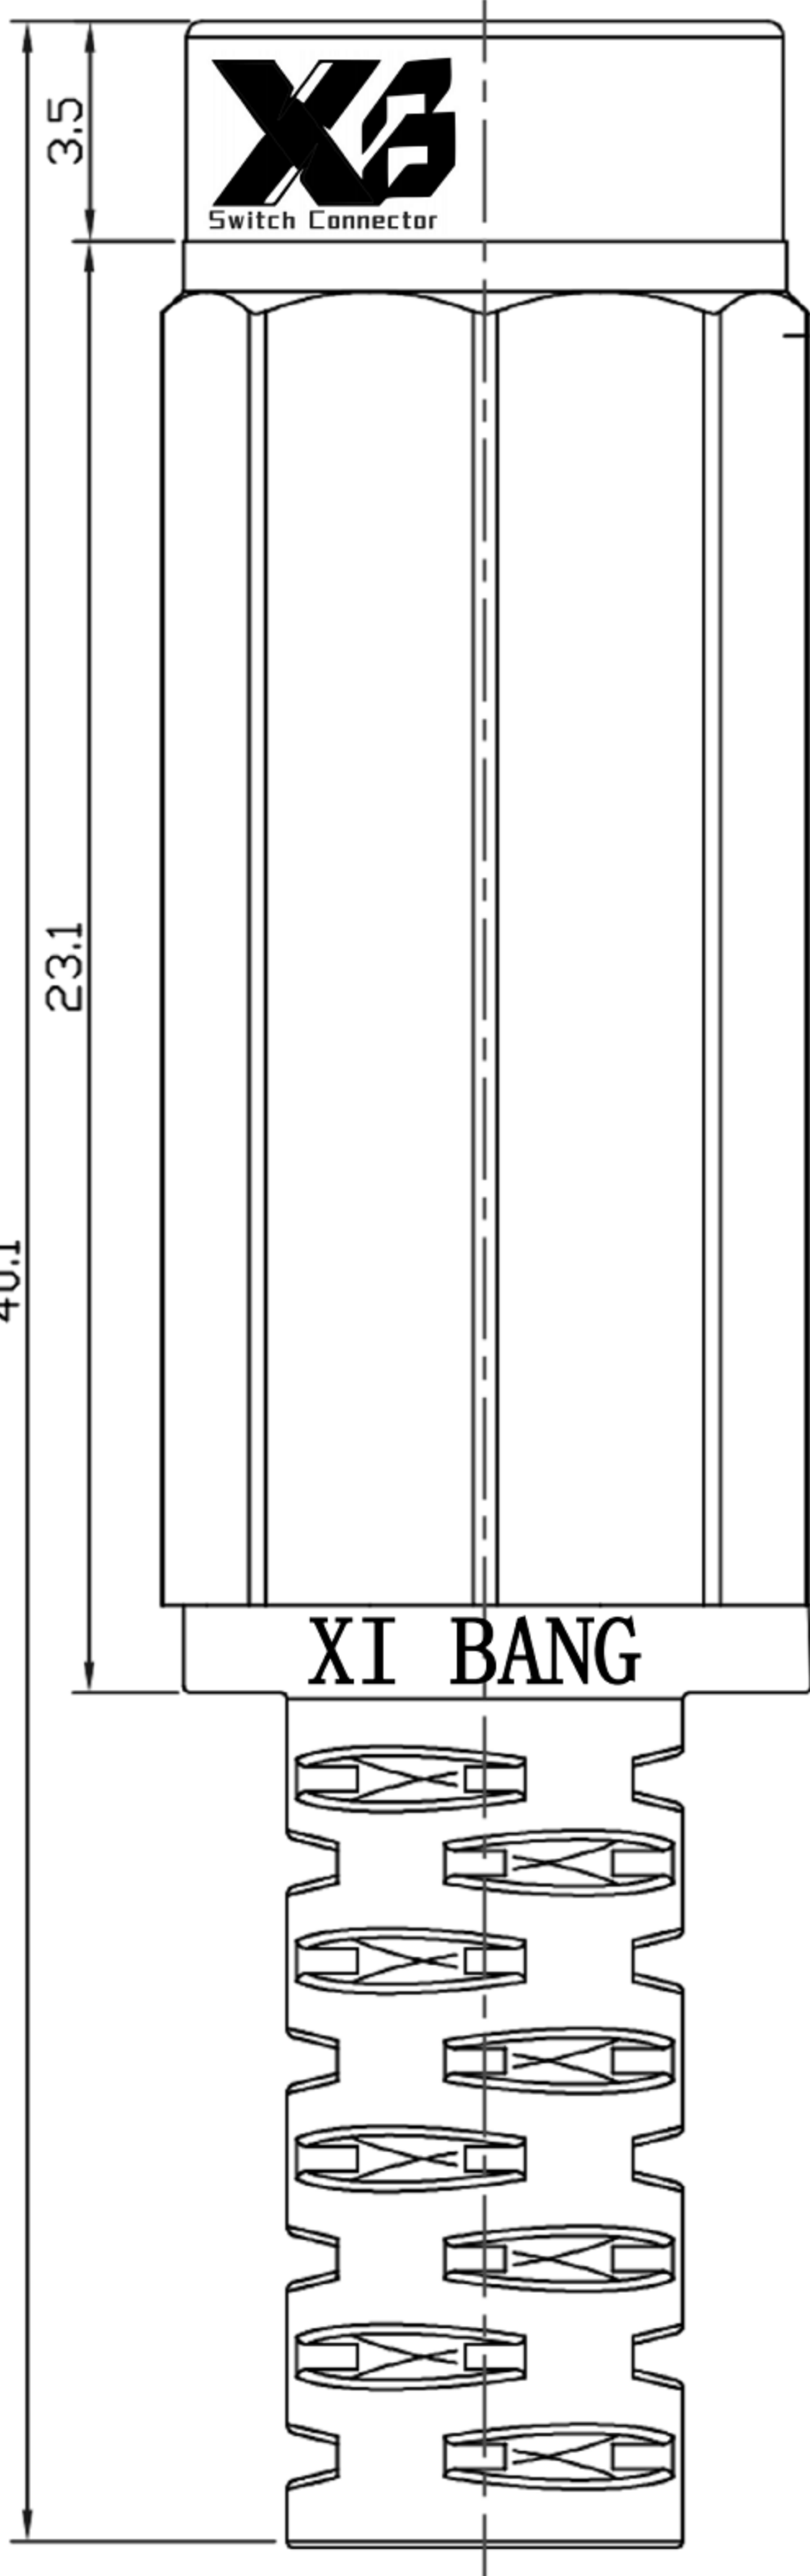


ROHS

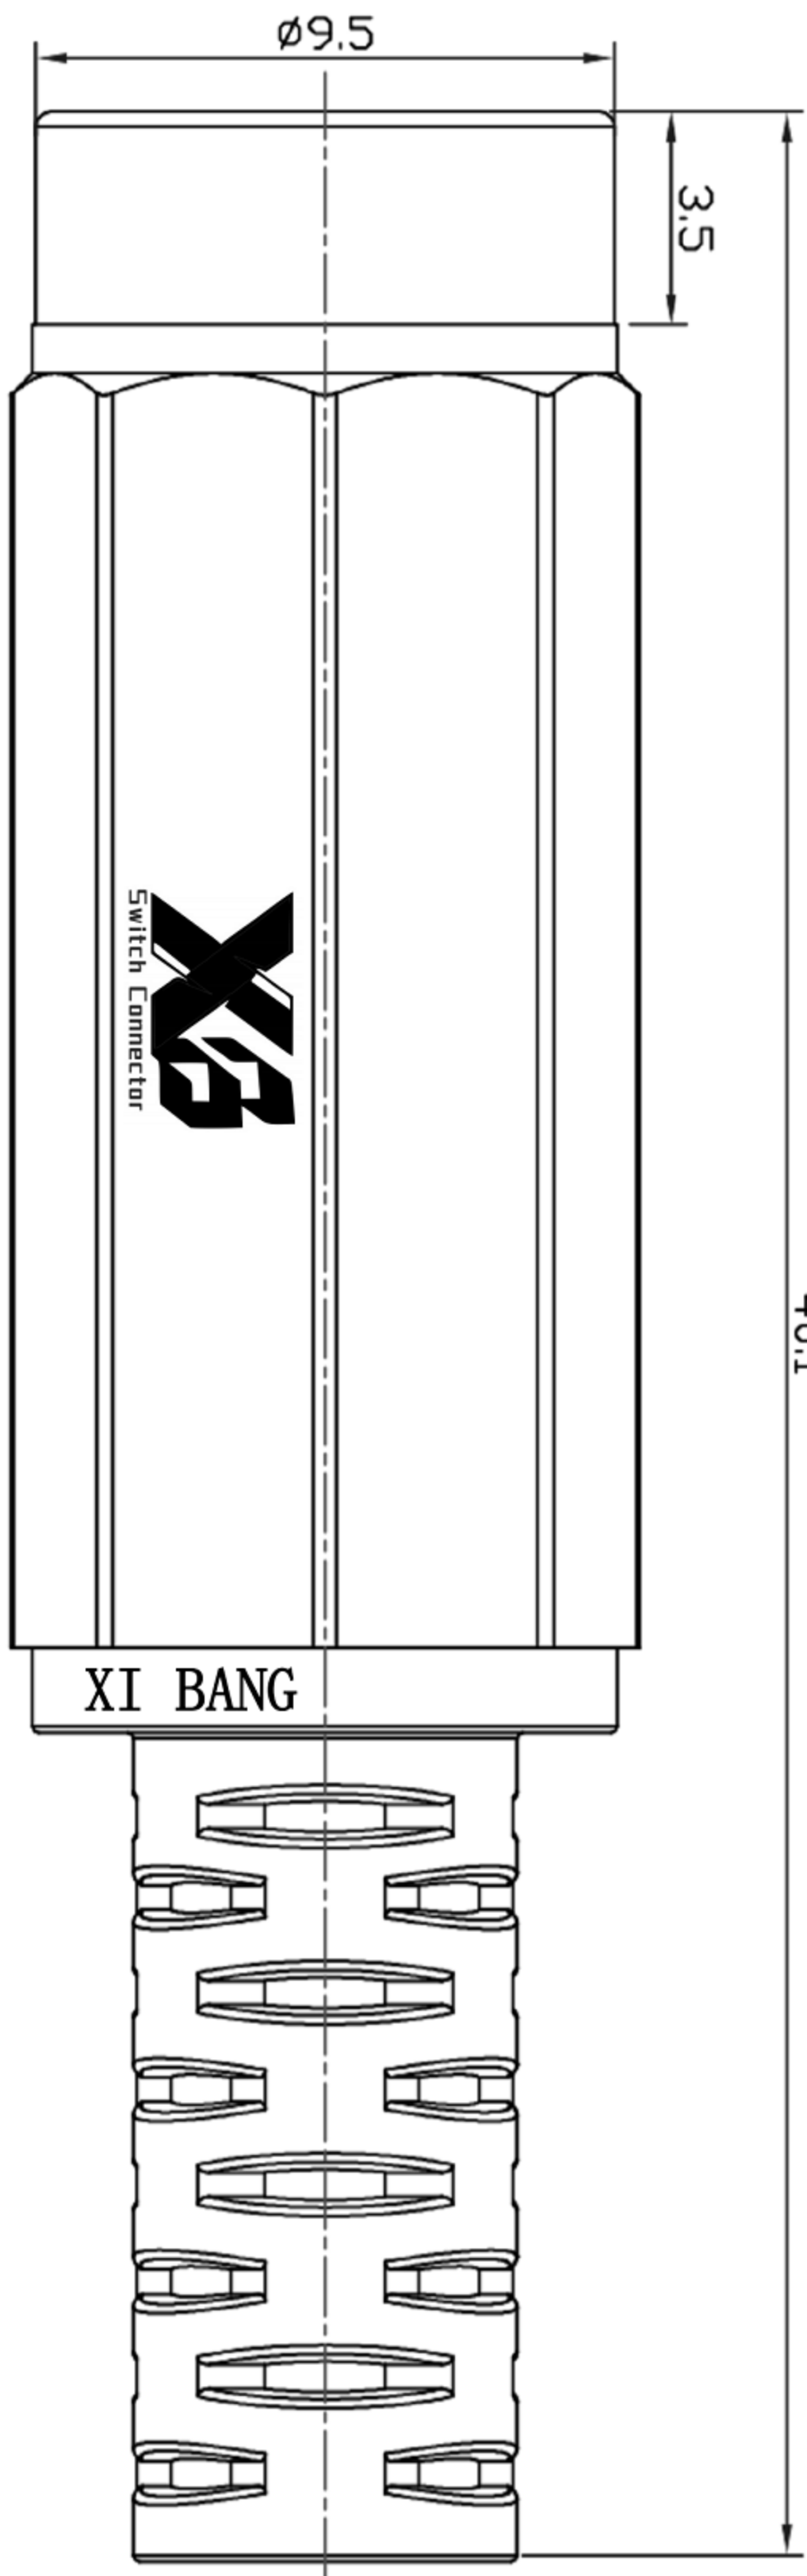

SCHEMATIC

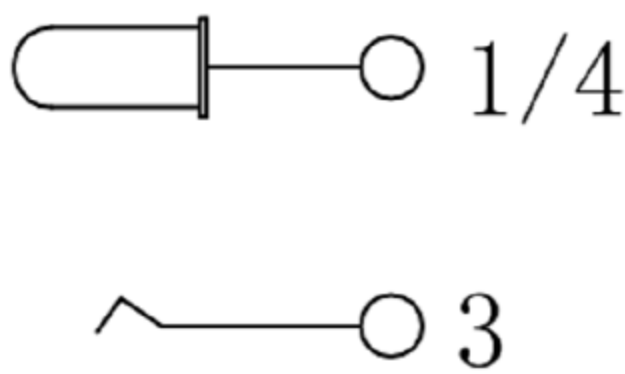


PIN	φ 1.3	
APPD		

SPECIFICATION

- 1.Rating : DC 30V , 1.0A 30A
- 2.Contact resistance : ≤30mΩ
- 3.Insulation resistance : ≥100MΩ
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles

6	XB-DC-9535-6	外塑座	1PCS	PA66	黑色
5	XB-DC-9535-5	塑料座	1PCS	PPA66	黑色
4	XB-DC-9535-4	4号脚	1PCS	H59-3黄铜	镀锡
3	XB-DC-9535-3	3号脚	1PCS	C5191磷铜=0.35	镀锡
2	XB-DC-9535-2	铜套	1PCS	H59-3黄铜棒	镀锡
1	XB-DC-9535-1	PIN	1PCS	H59-3黄铜棒	镀锡
序号	零件图代号	名称	数量	材料	镀层/颜色

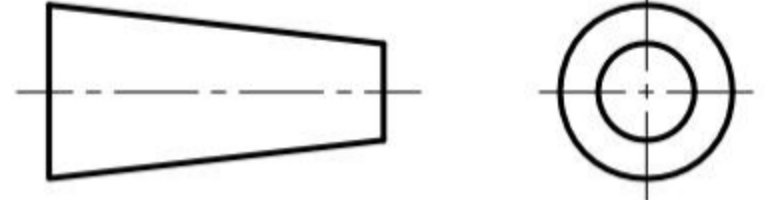		东莞市溪榜电子有限公司														
		DONG GUAN XI BANG ELECTRONICS CO.,LTD														
		TITLE : XB DC Power Jack										6	PIN	BRASS	1	Ni PLATED
		MODEL : XB-DC-9535-Y										5	TERMINAL	BRASS STRIP t=0.3	1	Ag PLATED
UNIT : MM		DWN.	ZENQ. CHEN	DATE		TOLERANCE ≤1.5mm ± 0.1 > 1.5mm ± 0.2 ≥10.0mm ± 0.3	ANGLE TOL ± 2°	4	SPRING TERMINAL C	PBS STRIP t=0.25	1	Ag PLATED				
SCALE : 3 : 1		CHK'D	DONG. PANG	DATE				3	TERMINAL B	BRASS STRIP t=0.3	1	Ag PLATED				
VERSION 01		APPD.	FEI. LONG. HE	DATE				2	TERMINAL A	BRASS STRIP t=0.3	1	Ag PLATED				
								1	HOUSING	PBT UL94-V0	1	BLACK				
								NO.	PART NAME	MATERIAL	QTY.	FINISHING				