
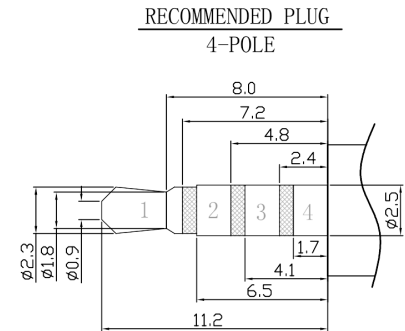


ROHS

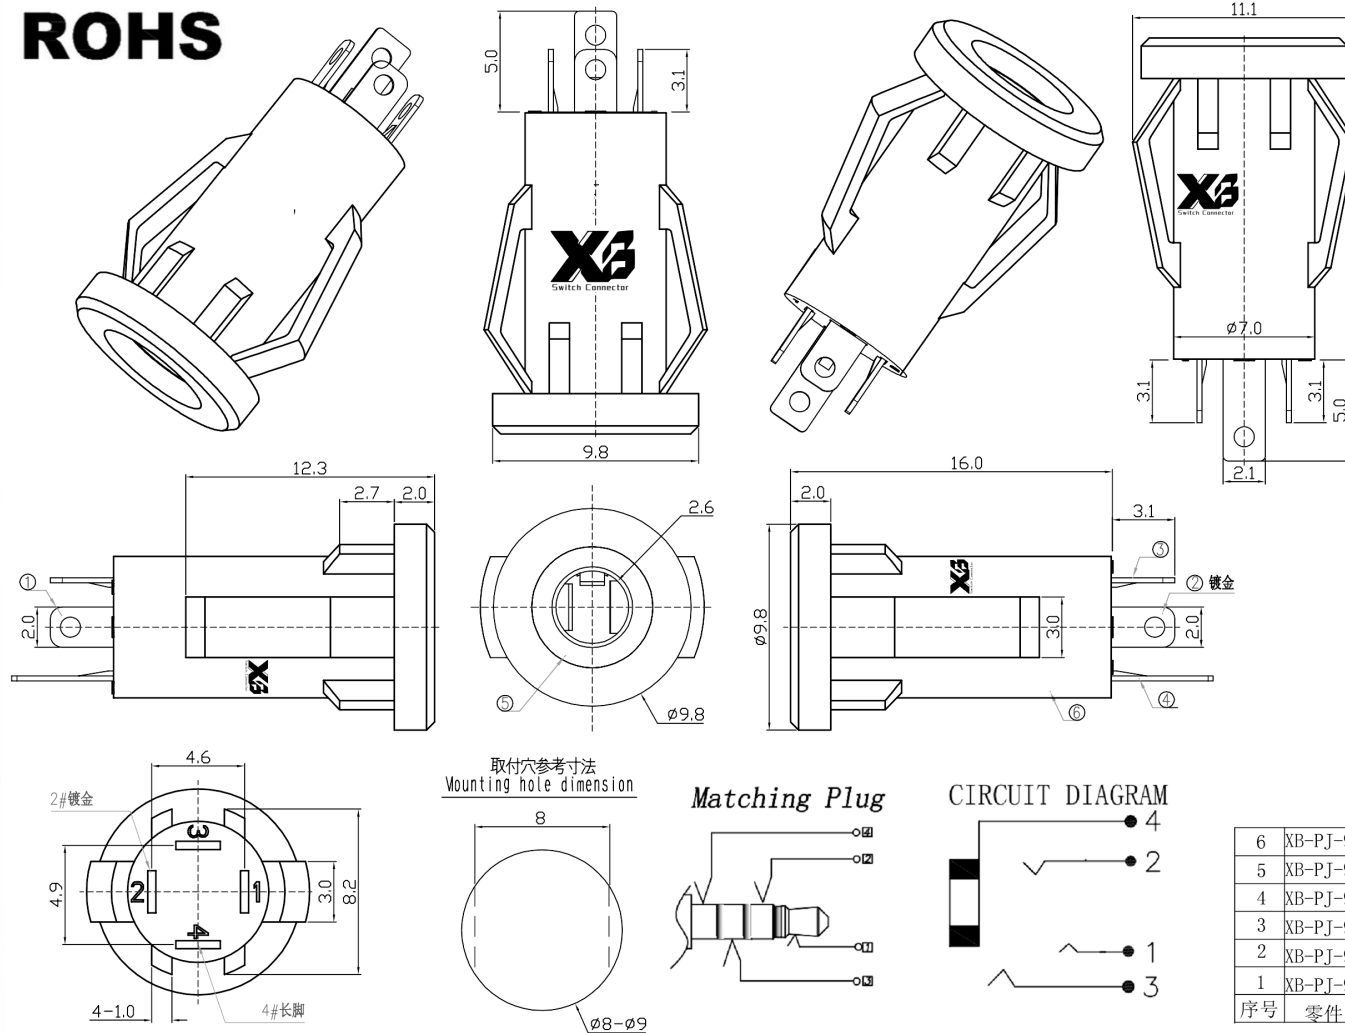

SPECIFICATION

- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °


6	XB-PJ-9806-4P-06	基座	1PCS	PA66	黑色	环保
5	XB-PJ-9806-4P-05	铜套	1PCS	H59-3黄铜	镀金	环保
4	XB-PJ-9806-4P-04	4号脚	1PCS	磷铜=0.25	镀银	环保
3	XB-PJ-9806-4P-03	3号脚	1PCS	铍青铜=0.25	镀银	环保
2	XB-PJ-9806-4P-02	2号脚	1PCS	铍青铜=0.25	镀金	环保
1	XB-PJ-9806-4P-01	1号脚	1PCS	铍青铜=0.25	镀银	环保
序号	零件图代号	名称	数量	材料	镀层/颜色	备注



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack

MODEL : XB-PJ-9806-4P 四极2.5耳机插座卡扣安装 焊线式



UNIT : MM	DWN.	ZENQ. CHEN	DATE		TOLERANCE	ANGLE TOL
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE		$\leq 1.5mm \pm 0.1$ $> 1.5mm \pm 0.2$ $\geq 10.0mm \pm 0.3$	$\pm 2^\circ$
VERSION	01	APPD.	FEI. LONG. HE	DATE		

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING