


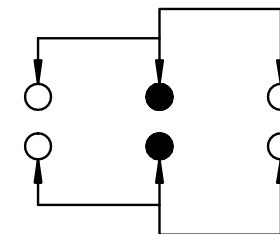
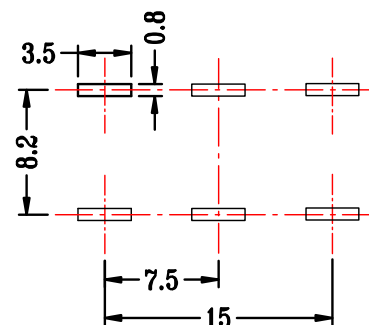


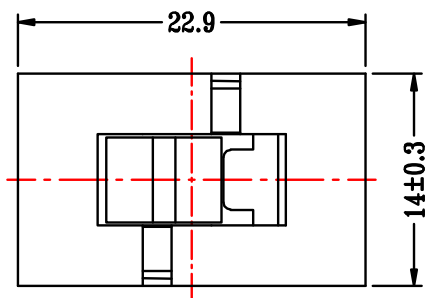

CAD FILE:

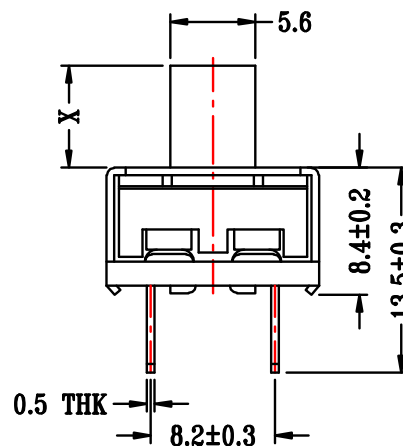

SCHEMATIC (NON-SHORTING)

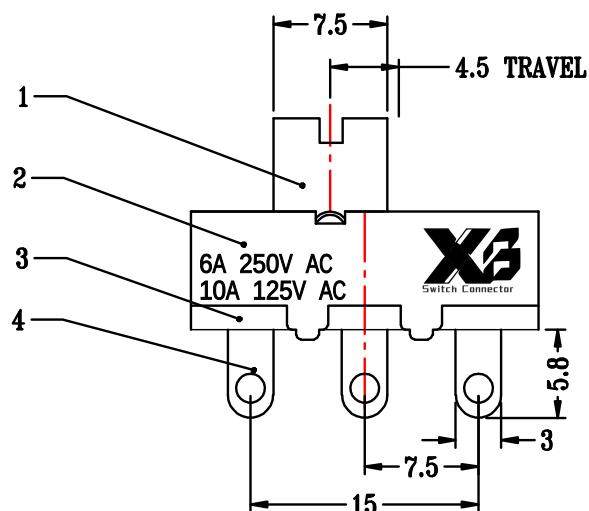

拨动开关技术参数：

1. 额定负荷: 6A 250V 10A 125V AC
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ AC1500V
4. 耐焊温度: $250\pm 5^\circ\text{C}$
5. 使用寿命: 10,000 cycles
6. 使用温度: -25 to 80
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE				
7	POSITION PLATE	PBS STRIP	1	NATURAL	UNLESS SPECIFIED				
6	SPRING PLATE	PBS STRIP	2	NATURAL	WITHIN 1.5mm : $\pm 0.1\text{mm}$				
5	CONTACT	COPPER STRIP	2	Ag PLATED	OVER 1.5mm : $\pm 0.2\text{mm}$	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
4	TERMINAL	BRASS STRIP	6	Ag PLATED OVER Ni PLATED	TITLE : VERTICAL SLIDE SWITCH		UNIT : mm	DRWG NO.: XB-SS-22L05P	
3	BASE	PHENOLIC RESIN	1	BLACK	MODEL: XB-SS-22L05P-H-5.8孔脚-		SCALE: 2:1	DWN.	高鹏
2	FRAME	STEEL STRIP	1	Ni PLATED				CHK'D	庞东
1	KNOB	PA66+30%	1	BLACK				APPD.	贺龙飞
NO.	PARTS	MATERIALS	Q'TY	FINISH	DONG GUAN XI BANG ELECTRONICS CO.,LTD				