


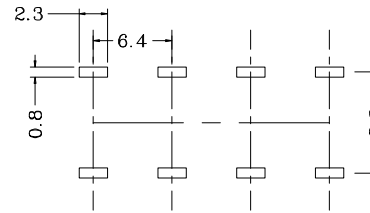
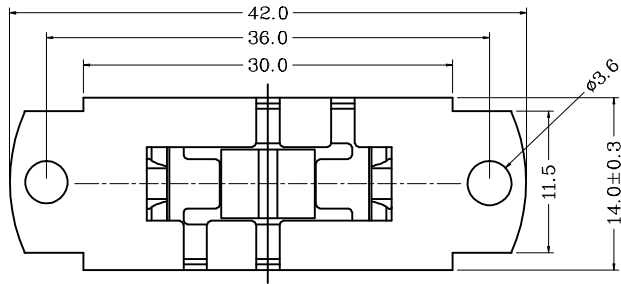


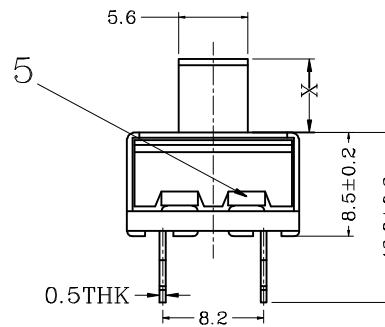

CAD FILE:

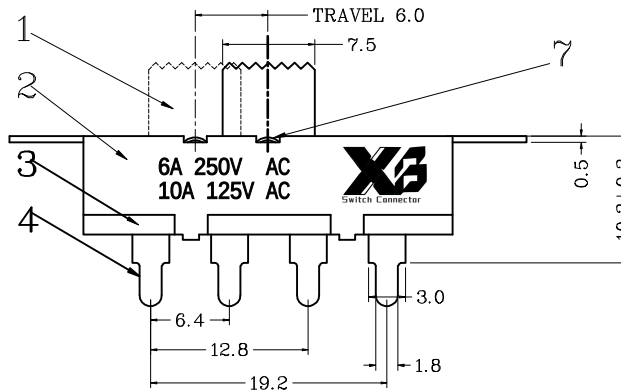

P. C. B LAYOUT
BOTTOM VIEW

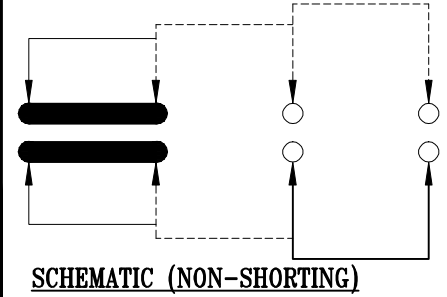

拨动开关技术参数：

1. 额定负荷: 6A 250V 10A 125V AC
2. 接触阻抗: $\leq 50\text{m}\Omega$
3. 绝缘阻抗: $\geq 100\text{m}\Omega$ AC1500V
4. 耐焊温度: $250\pm 5^\circ\text{S}$
5. 使用寿命: 10,000 cycles
6. 使用温度: -25 to 80
7. 使用湿度: $\leq 85\% \text{ RH}$
8. 操作力: 160gf 256gf 300gf 可定制
9. 手柄长度: 2mm-10mm 可定制

8					TOLERANCE					
7	LOCATING PLATE	C5120	1	NATURAL	UNLESS SPECIFIED					
6	SPRING PLATE	PBS STRIP	2	NATURAL	WITHIN 1.5mm : ±0.1mm	A		初 版		
5	CONTACT	COPPER STRIP	2	Ag PLATED	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.
4	TERMINAL	COPPER STRIP	8	Ag PLATED	TITLE : VERTICAL SLIDE SWITCH			UNIT : mm	DRWG NO.: XB-SS-23L16X	
3	BASE	PHENOLIC RESIN	1	YELLOW	MODEL:XB-SS-23L16X -5.8针脚-有耳			SCALE: 2:5	DWN.	高鹏
2	FRAME	STEEL STRIP	1	Ni PLATED				CHK'D	庞军	
1	KNOB	PA66+30%纤	1	BLACK	DONG GUAN XI BANG ELECTRONICS CO.,LTD			APPD.	贺龙飞	
NO.	PARTS	MATERIALS	Q'TY	FINISH						