

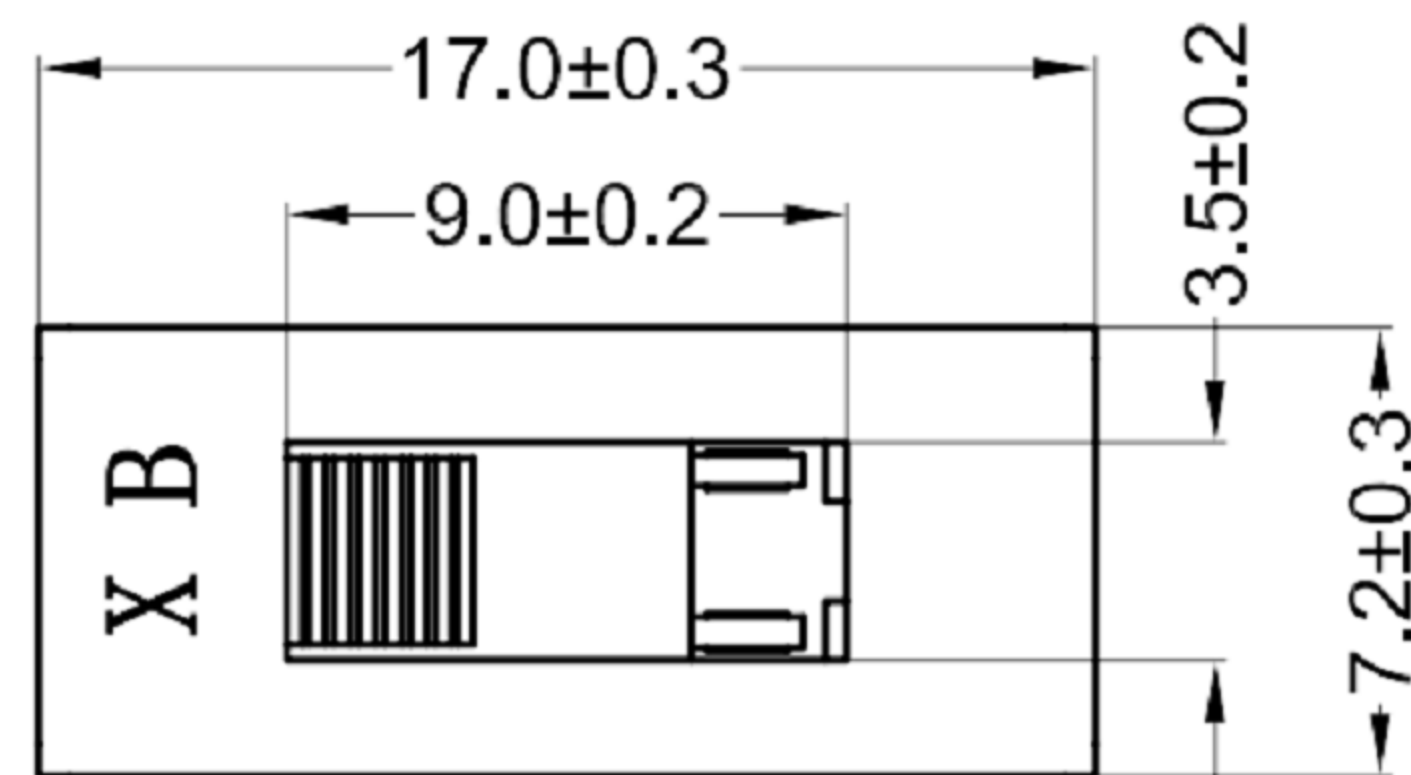
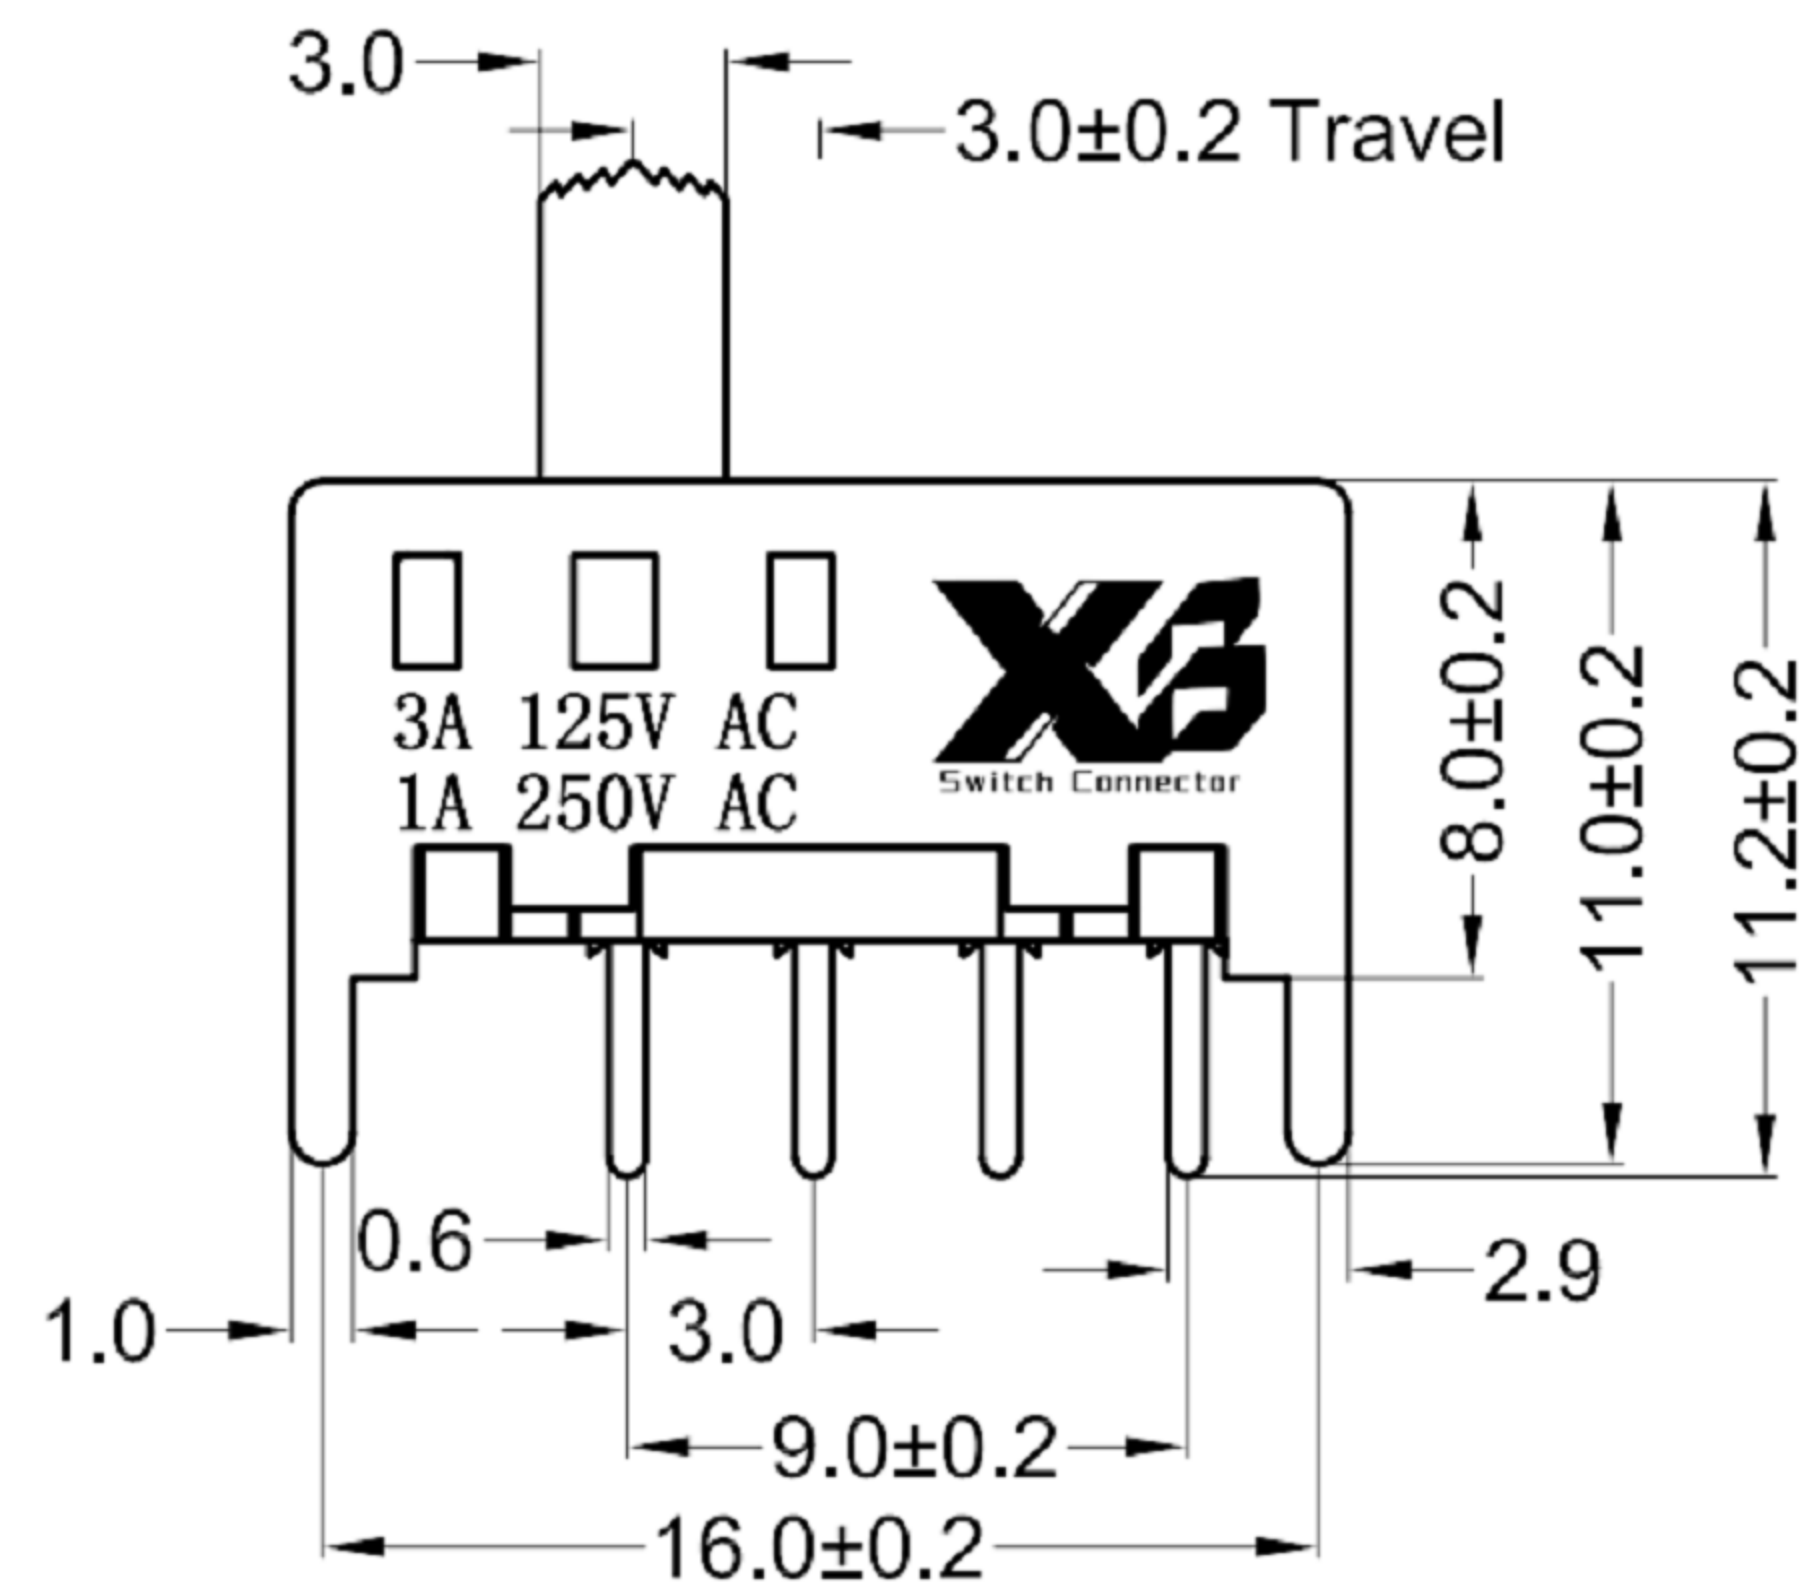
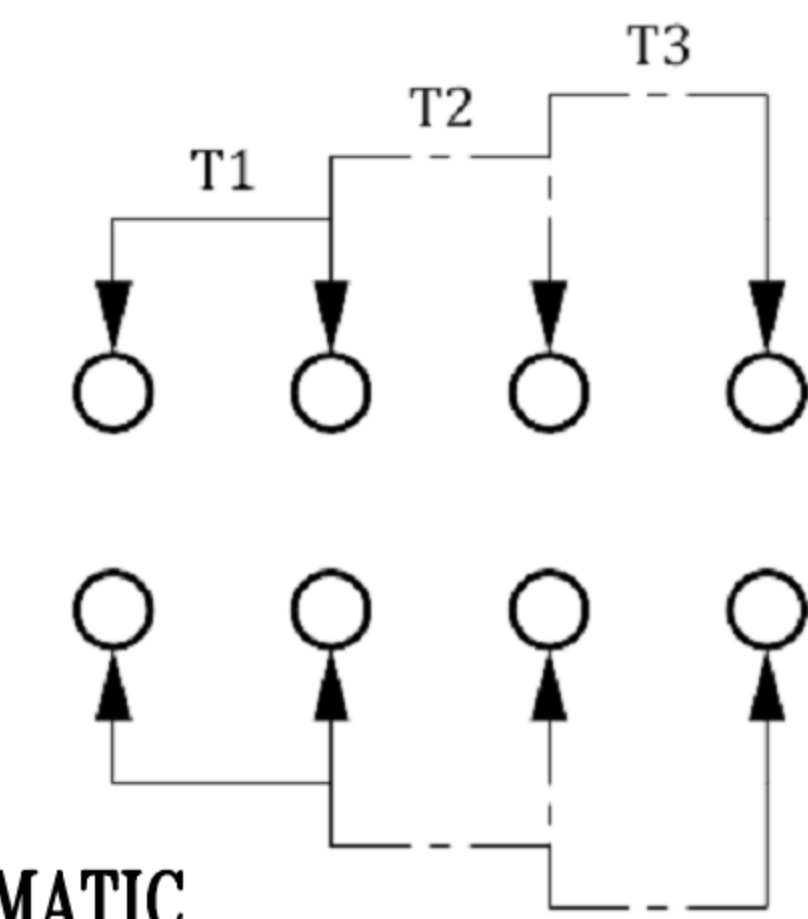



CAD FILE:

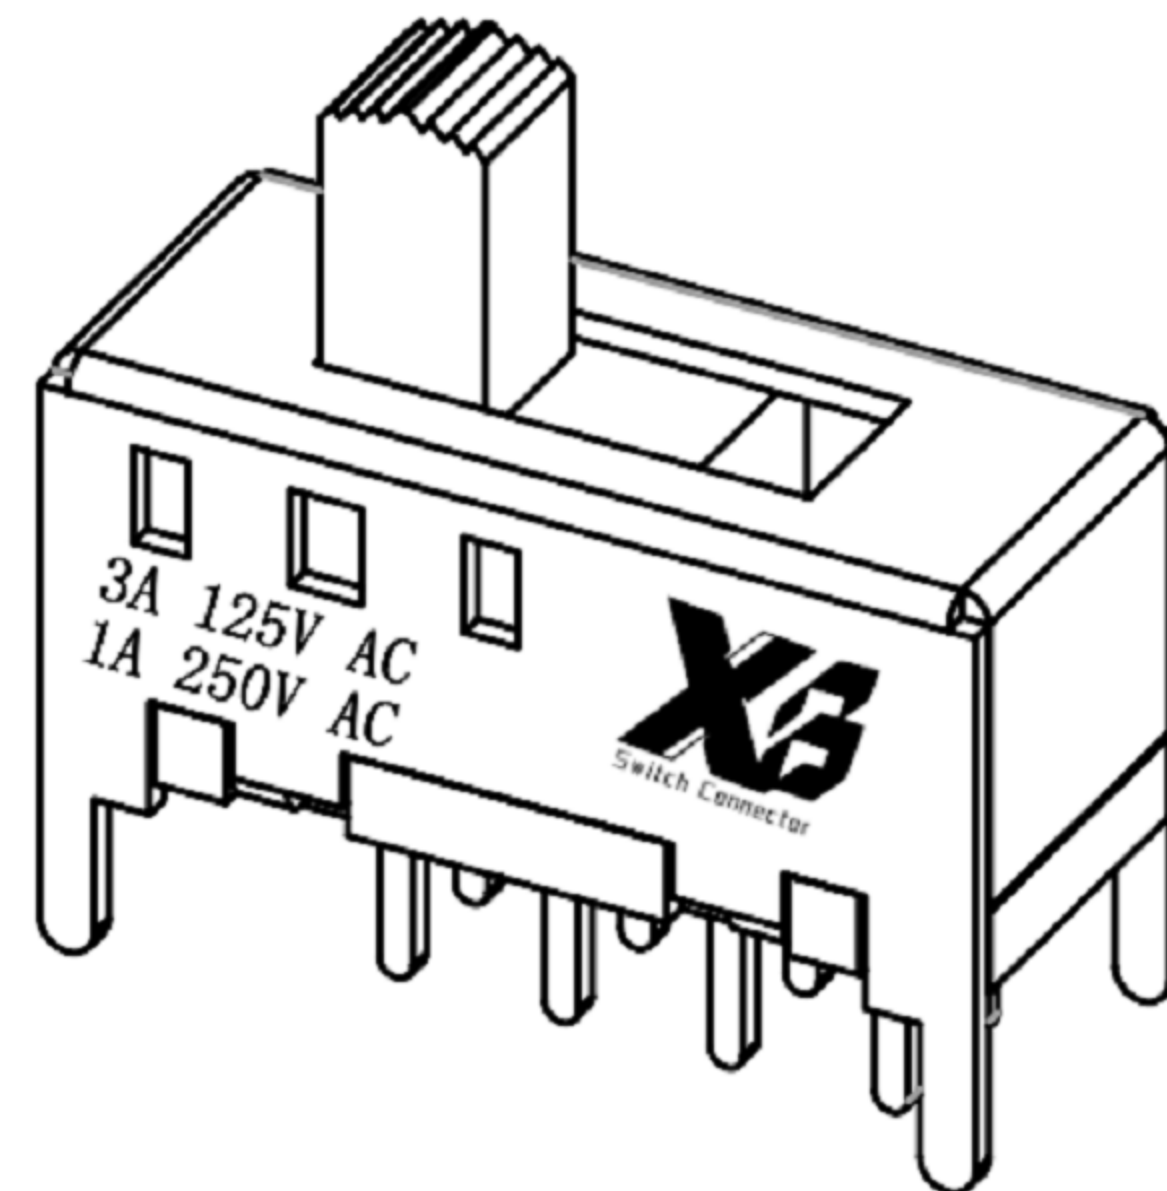

注: “*” 表示关键尺寸 (6个)

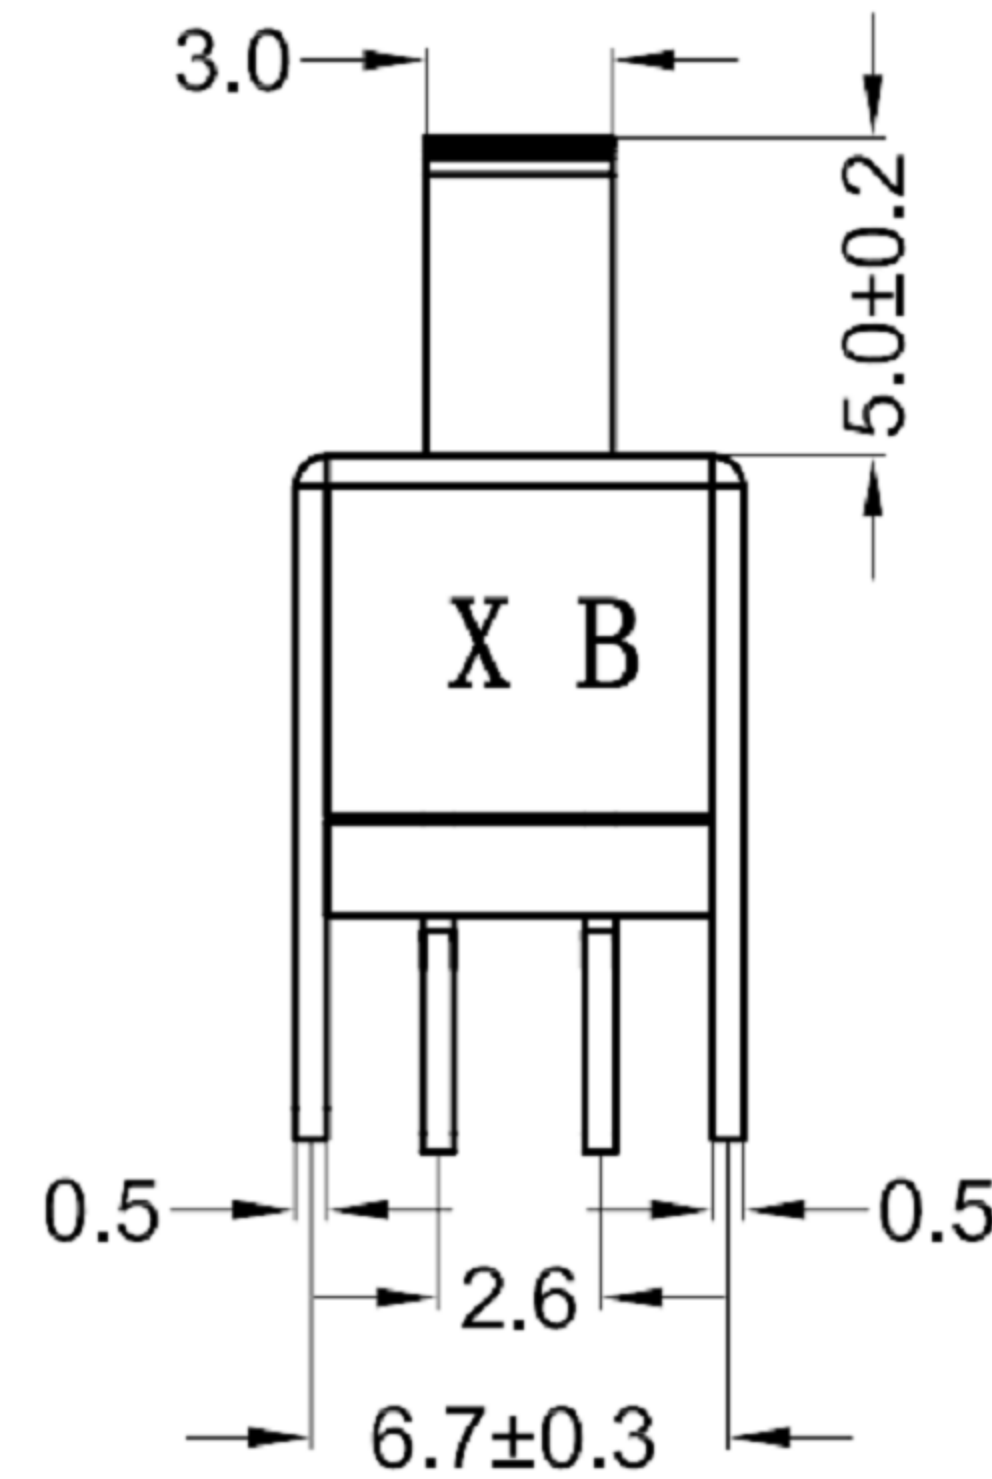

SCHEMATIC

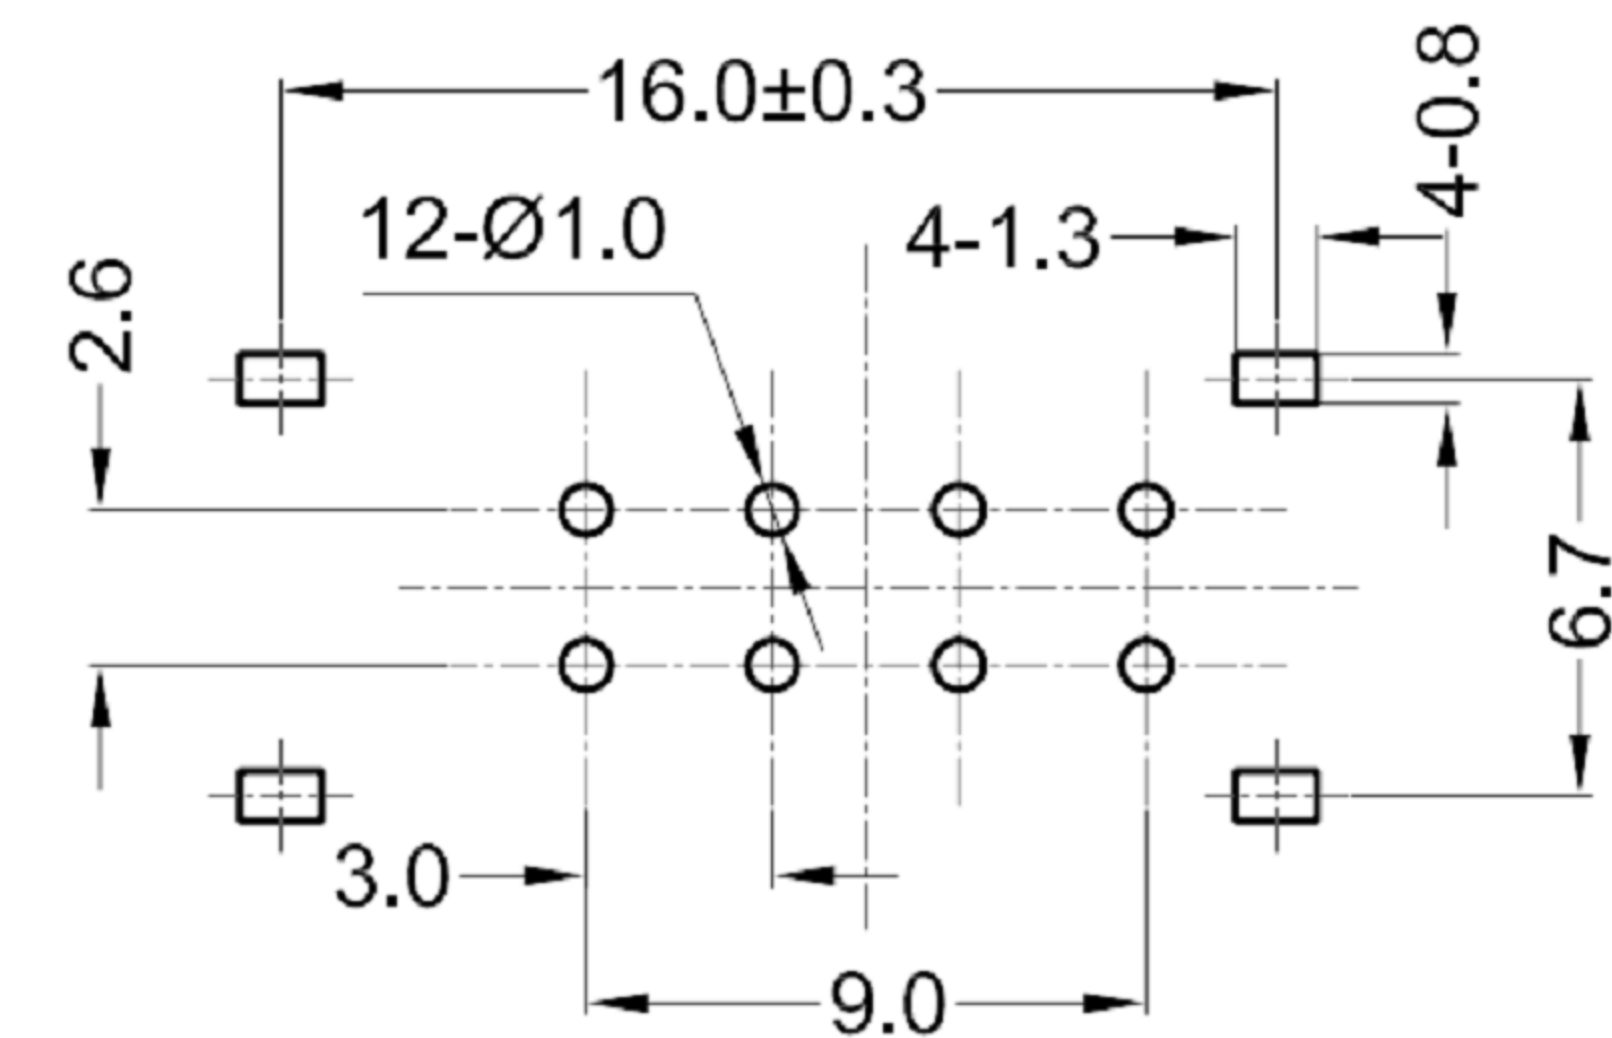

P.C.B LAYOUT
BOTTOM VIEW

规格 Specification:

- 1.型号 Model: XB-SS-H25-2301
- 2.额定值 Rating: 3A 125VAC/1A 250VAC
- 2.接触电阻 Contact resistance: $\leq 100 \text{ m}\Omega$
- 3.绝缘电阻 Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC500V/Min)
- 4.使用寿命 Operation life: > 5000 cycles (Unloading)
- 5.操作力 Operation force: $350 \pm 100 \text{ gf}$
- 6.所有材料符合Rohs要求 All materials are Rohs compliant

8					TOLERANCE UNLESS SPECIFIED					
7										
6	SPRING PLATE	SUS304	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A/0	2024-5-24			
5	CONTACT CLIP	C5210R	1	Ag CLAD	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		
4	TERMINAL	C2680R	6	Ag PLATED	TITLE : SLIDE SWITCH			UNIT : mm	DRWG NO.:	
3	BASE	PHENOLIC RESIN	1	NATURAL	MODEL: XB-SS-H25-2301			SCALE: 3:1		
2	FRAME	SPCC	1	Sn PLATED	XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			DWN.	高鹏	2024-7-8
1	KNOB	PA66	1	BLACK				CHK'D	庞东	2024-7-8
NO.	PARTS	MATERIALS	Q'TY	FINISH				APPD.	贺龙飞	2024-7-8