

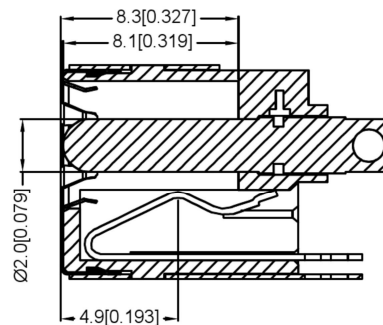
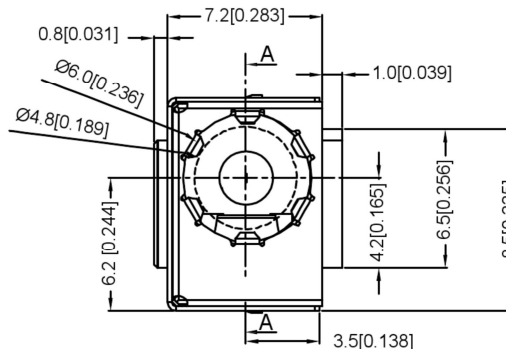
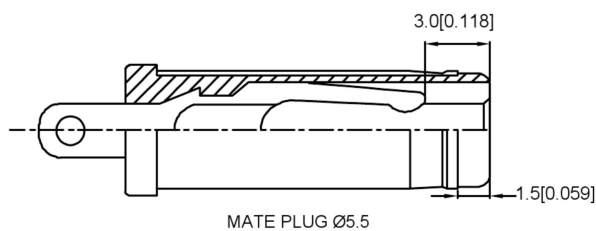
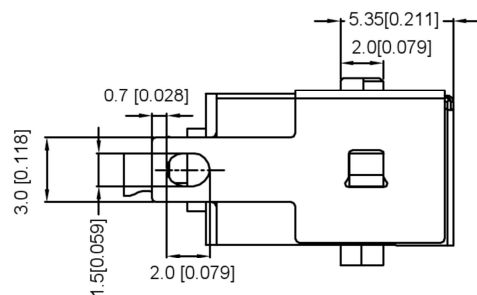


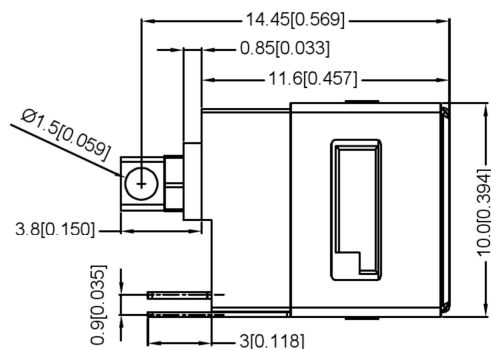

SECTION A-A

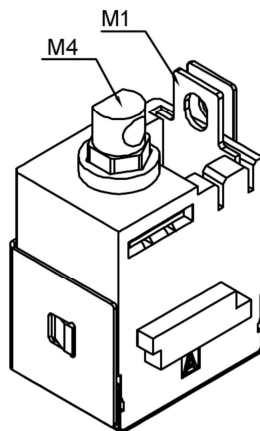

NOTES:

笔记:

- 1.CONTACT CURRENT RATING:7A
- 1.触点额定电流: 7A
- 2.CONTACT RESISTANCE:50 mΩ MAX
- 2.接触电阻: 最大50 mΩ
3. INSULATION RESISTANCE:100MΩ MIN
- 3.绝缘电阻: 100MΩ MIN
- 4.DIELECTRIC WITHSTANDING: 500V AC MIN.
- 4.耐介质: 最小500V AC.
- 5.DURABILITY:5.000 CYCLES MIN.
- 5.耐久性: 至少5.000次循环。
- 6CONNECTOR MATING FORCES:29.4N(3.00Kgf)MAX.;
- 6连接器配合力: 最大29.4N (3.00Kgf) 。
- 7.CONNECTOR UNMATING FORCES:2.94N(0.30Kgf) MIN
- 7.连接器脱离力: 最小2.94N (0.30Kgf)

SCHEMATIC	
Model	DC-044AE
Center Pin	Ø2.0 mm
	Ø2.5 mm

	MATERIAL	PLATING
axis support	Brass	silver
center pin	Brass	silver
plastic	Pbt	
terminal 1	Brass	silver
terminal 2	Phosphor Bronze	silver
terminal 3	Brass	silver

				ANGLAR	±5°
				L ≤ 4	±0.2
				4<L ≤ 16	±0.3
				16<L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE: DC POWER JACK		
DWN		VIEW: 	PART NO.: DC-044AE-2.0		
CHKD		UNIT: mm/in	DWG NO.:		
APPD		SIZE: A4			
ANG ELECTRONIC CO., LTD			WEIGHT	SHEET	REVISION
				1/1	A0