


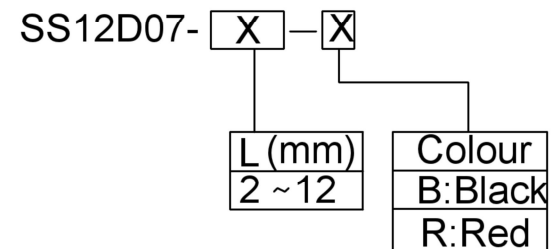


SCHEMATIC (NON-SHORTING)

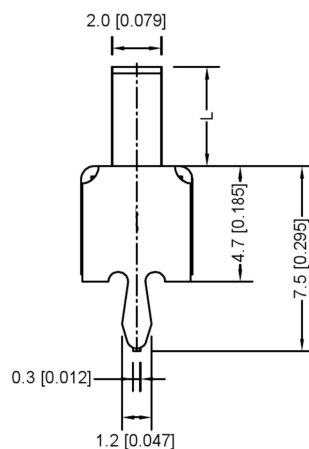

P.C.B LAYOUT
BOTTOM VIEW

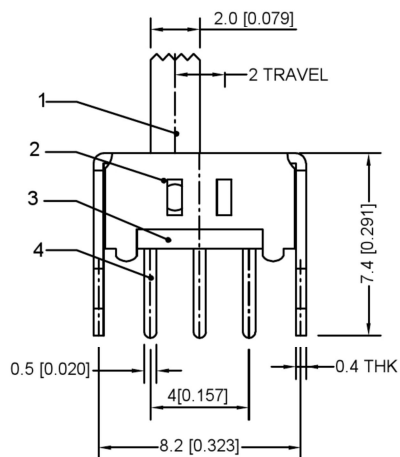

		—				—
		—				—
		—				—
④	Terminal	—	3	Brass (0.30t)	ag Plated	—
③	Base	—	1	Phenolic Resin		—
②	Cover	—	1	Sus	Natural	—
①	Keystake	—	1	Pa66	Black	—
ITEM	PAPT NAME	TER,NO	QTY	MATERIAL	FINISHING	REMARK

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	100mΩ MAX
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(CYCLES)	10,000

				ANGLAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
	DATE	REVISED	APPROVED	L > 63	±0.5
				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DSND		SCALE: N/A	MODEL TYPE: SLIDE SWITCH
DWN		VIEW:	PART NO.: SS12D07
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	
		WEIGHT	SHEET
			1/1
		REVISIC	A0

DONG GUAN XI BANG ELECTRONIC CO., LTD