

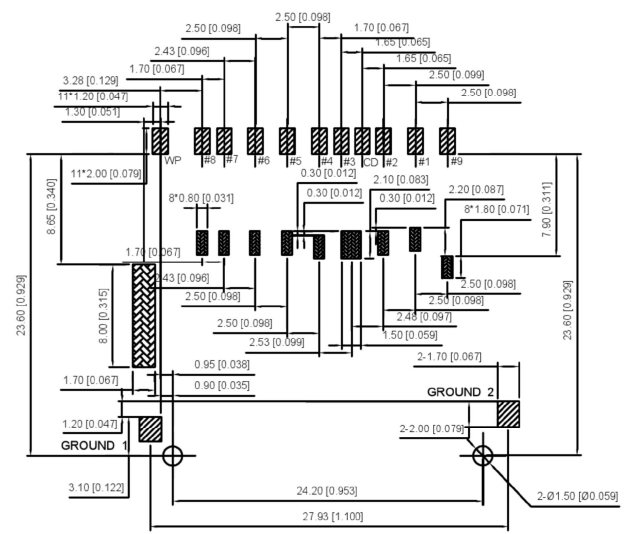


Recommend PCB Layout Drawing:  
(Unit: mm .X±0.15 .XX±0.05 .XXX±0.02)




Electrical:  
Current Rating:0.5mA AC/DC max.  
Voltage Rating: 12V AC/DC  
Ambient Temperature Range:-20°C to +60°C  
Storage Temperature Range: -40°C to +70°C  
Ambient Humidity Range: 95% R.H. Max.  
Contact Resistance:100mQmax.  
Insulation Resistance:1000MΩmin./500VDC  
Mating Cycles:5000 Insertions

PIN NO.	PIN NAME
#1	(CD/DAT3)
#2	(CMD)
#3	(VSS1)
#4	(VDD)
#5	(CLK)
#6	(VSS2)
#7	(DAT0)
#8	(DAT1)
#9	(DAT2)

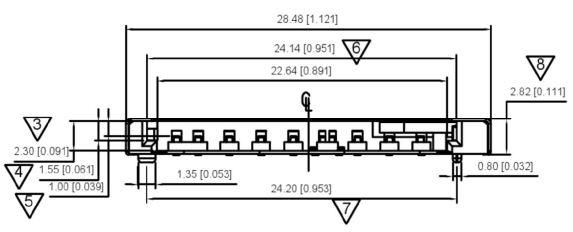

Welding area  
prohibited layout area

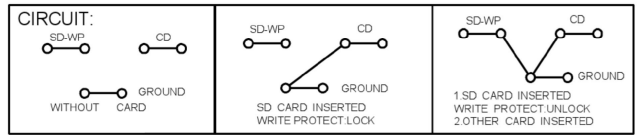

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

REVISIONS	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES	DSND	SCALE: N/A	MODEL TYPE: SIM CARD CONN
				ANGLAR ±5°			
				L ≤ 4 ±0.2		VIEW:	PART NO.: XKSD-006
				4 < L ≤ 16 ±0.3		UNIT: mm/in	DWG NO.:
				16 < L ≤ 63 ±0.4		SIZE: A4	
				L > 63 ±0.5			
					DONG GUAN XI BANG ELECTRONIC CO., LTD		
					WEIGHT	SHEET	REVISION
						1/1	A0

