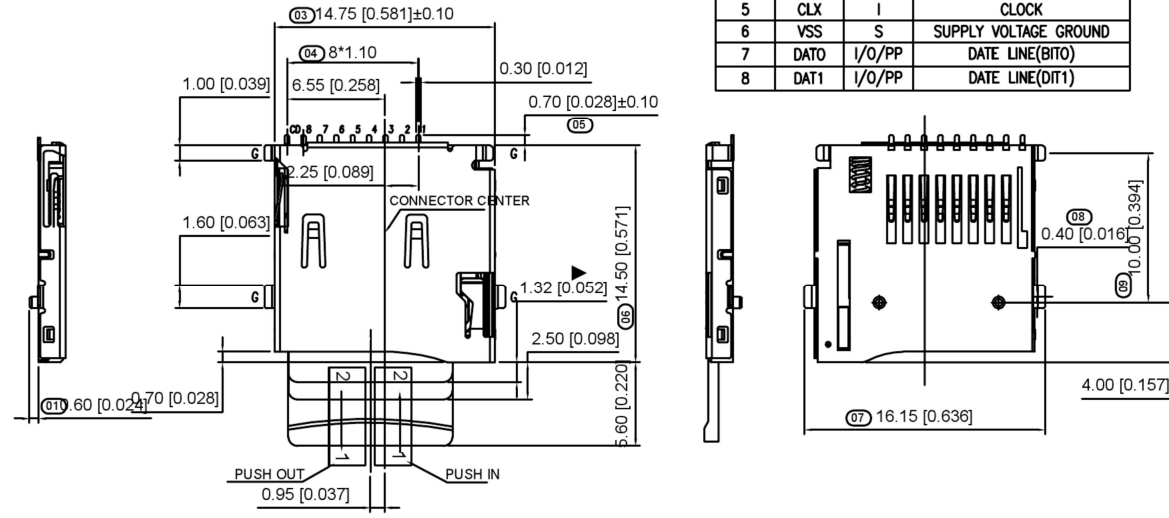


PIN NO.	NAME	TYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

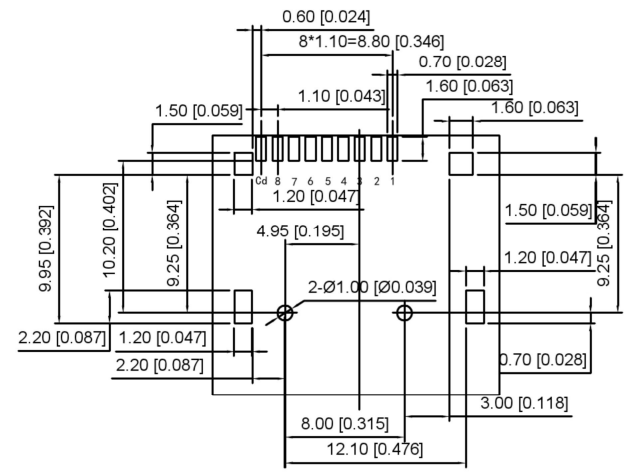
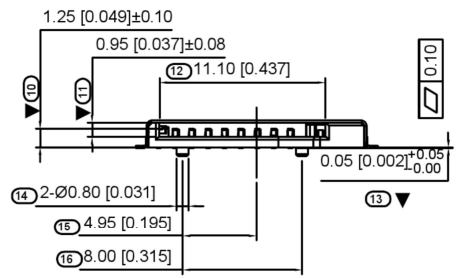
Specification:

- Electrical Characteristics:  
 Contact Current Rating:0.5 Amperes.  
 Dielectric Withstanding Voltage:AC500V r.m.s.  
 Insulation Resistance:1000 MΩ Minimum.  
 Contact Resistance:40 mΩ Maximum.
  - Environmental:  
 Operating Temperature:-25°C~+90°C.
  - Environmental:  
 Mating Cycles:5,000 Insertions.
  - Mechanical Characteristics:  
 Card Push Insertion/Out Force:0.2~1.40kgf.  
 Contact Separation Force:0.20kgf Minimum.
  - Material:  
 Insulator:HI-Temp Plastic UL 94V-0 Rated.  
 Contact:Copper Alloy(t=0.15mm).  
 Shell:Stainless Steel(t=0.15mm).  
 Spring:SWP.
- 6 (X) Make is FAI test Dimension  
 ▼ Make is major test Dimension





TF-015-X

G=GOLD 1u"  
 N=NICKEL 80u"



RECOMMENDED P.C.B HOLE LAYOUT  
 COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
④	Spring	1	SWP	
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-0	BLACK

REVISIONS				UNSPECIFIED TOLERANCES		DSND	SCALE: N/A	MODEL TYPE: TF CARD CONN		
				ANGLAR ±5°		DWN	VIEW: 	PART NO.: XKTF-015-X		
				L ≤ 4 ±0.2		CHKD	UNIT: mm/in	DWG NO.:		
				4 < L ≤ 16 ±0.3		APPD	SIZE: A4			
				16 < L ≤ 63 ±0.4				WEIGHT	SHEET	REVISION
				L > 63 ±0.5	DONG GUAN XI BANG ELECTRONIC CO., LTD			1/1	A0	